

# IAR Embedded Workbench®

## IAR C/C++ Development Guide

### Compiling and Linking

for Advanced RISC Machines Ltd's

**ARM® Cores**



## **COPYRIGHT NOTICE**

© 1999–2014 IAR Systems AB.

No part of this document may be reproduced without the prior written consent of IAR Systems AB. The software described in this document is furnished under a license and may only be used or copied in accordance with the terms of such a license.

## **DISCLAIMER**

The information in this document is subject to change without notice and does not represent a commitment on any part of IAR Systems. While the information contained herein is assumed to be accurate, IAR Systems assumes no responsibility for any errors or omissions.

In no event shall IAR Systems, its employees, its contractors, or the authors of this document be liable for special, direct, indirect, or consequential damage, losses, costs, charges, claims, demands, claim for lost profits, fees, or expenses of any nature or kind.

## **TRADEMARKS**

IAR Systems, IAR Embedded Workbench, C-SPY, visualSTATE, The Code to Success, IAR KickStart Kit, I-jet, I-scope, IAR, and the logotype of IAR Systems are trademarks or registered trademarks owned by IAR Systems AB.

Microsoft and Windows are registered trademarks of Microsoft Corporation.

ARM, Thumb, and Cortex are registered trademarks of Advanced RISC Machines Ltd.

Adobe and Acrobat Reader are registered trademarks of Adobe Systems Incorporated.

All other product names are trademarks or registered trademarks of their respective owners.

## **EDITION NOTICE**

Thirteenth edition: September 2014

Part number: DARM-13

This guide applies to version 7.30.x of IAR Embedded Workbench® for ARM.

Internal reference: M17, csrct2010.1, V\_110411, IMAE.

# Brief contents

Tables .....	27
Preface .....	29
<b>Part 1. Using the build tools</b> .....	<b>37</b>
Introduction to the IAR build tools .....	39
Developing embedded applications .....	45
Data storage .....	59
Functions .....	63
Linking using ILINK .....	75
Linking your application .....	91
The DLIB runtime environment .....	103
Assembler language interface .....	141
Using C .....	165
Using C++ .....	175
Application-related considerations .....	187
Efficient coding for embedded applications .....	201
<b>Part 2. Reference information</b> .....	<b>219</b>
External interface details .....	221
Compiler options .....	231
Linker options .....	275
Data representation .....	305
Extended keywords .....	319

Pragma directives .....	333
Intrinsic functions .....	355
The preprocessor .....	391
Library functions .....	399
The linker configuration file .....	409
Section reference .....	433
The stack usage control file .....	439
IAR utilities .....	447
Implementation-defined behavior for Standard C .....	479
Implementation-defined behavior for C89 .....	495
Index .....	507

# Contents

Tables .....	27
Preface .....	29
<b>Who should read this guide</b> .....	29
<b>How to use this guide</b> .....	29
<b>What this guide contains</b> .....	30
<b>Other documentation</b> .....	31
<b>Document conventions</b> .....	34
<b>Part I. Using the build tools</b> .....	37
Introduction to the IAR build tools .....	39
<b>The IAR build tools—an overview</b> .....	39
<b>IAR language overview</b> .....	41
<b>Device support</b> .....	41
<b>Special support for embedded systems</b> .....	43
Developing embedded applications .....	45
<b>Developing embedded software using IAR build tools</b> .....	45
Interoperability with other build tools .....	47
<b>The build process—an overview</b> .....	47
<b>Application execution—an overview</b> .....	50
<b>Building applications—an overview</b> .....	54
<b>Basic project configuration</b> .....	54
Processor configuration .....	55
Data storage .....	59
<b>Introduction</b> .....	59
<b>Storage of auto variables and parameters</b> .....	60
<b>Dynamic memory on the heap</b> .....	61

Functions .....	63
<b>Function-related extensions</b> .....	63
<b>ARM and Thumb code</b> .....	63
<b>Execution in RAM</b> .....	64
<b>Interrupt functions for Cortex-M devices</b> .....	65
Interrupts for Cortex-M .....	65
<b>Interrupt functions for ARM7/9/11, Cortex-A, and Cortex-R devices</b> .....	66
Interrupt functions .....	66
Installing exception functions .....	67
Interrupts and fast interrupts .....	68
Nested interrupts .....	69
Software interrupts .....	70
Interrupt operations .....	71
<b>Inlining functions</b> .....	71
Linking using ILINK .....	75
<b>Linking—an overview</b> .....	75
<b>Modules and sections</b> .....	76
<b>The linking process in detail</b> .....	77
<b>Placing code and data—the linker configuration file</b> .....	79
<b>Initialization at system startup</b> .....	81
<b>Stack usage analysis</b> .....	84
Linking your application .....	91
<b>Linking considerations</b> .....	91
Veneers .....	100
<b>Hints for troubleshooting</b> .....	101
The DLIB runtime environment .....	103
<b>Introduction to the runtime environment</b> .....	103
<b>Using prebuilt libraries</b> .....	105
Library filename syntax .....	106
Groups of library files .....	107
<b>Choosing formatters for printf and scanf</b> .....	108

<b>Application debug support</b> .....	111
<b>Adapting the library for target hardware</b> .....	114
<b>Overriding library modules</b> .....	115
<b>Building and using a customized library</b> .....	115
<b>System startup and termination</b> .....	117
<b>Customizing system initialization</b> .....	120
<b>Library configurations</b> .....	121
<b>Standard streams for input and output</b> .....	122
<b>Configuration symbols for printf and scanf</b> .....	124
<b>File input and output</b> .....	126
<b>Locale</b> .....	126
<b>Environment interaction</b> .....	129
<b>Signal and raise</b> .....	130
<b>Time</b> .....	130
<b>Math functions</b> .....	130
<b>Assert</b> .....	132
<b>Atexit</b> .....	133
<b>Managing a multithreaded environment</b> .....	133
Enabling multithread support .....	134
<b>Checking module consistency</b> .....	138
<b>Assembler language interface</b> .....	141
<b>Mixing C and assembler</b> .....	141
Reference information for inline assembler .....	144
An example of how to use clobbered memory .....	150
<b>Calling assembler routines from C</b> .....	150
<b>Calling assembler routines from C++</b> .....	152
<b>Calling convention</b> .....	153
Preserved versus scratch registers .....	155
Function entrance .....	156
Function exit .....	157
Examples .....	159
<b>Call frame information</b> .....	160
Creating assembler source with CFI support .....	161

Using C .....	165
<b>C language overview</b> .....	165
<b>Extensions overview</b> .....	166
<b>IAR C language extensions</b> .....	167
Using C++ .....	175
<b>Overview—EC++ and EEC++</b> .....	175
<b>Overview—Standard C++</b> .....	177
<b>Enabling support for C++ and variants</b> .....	180
<b>C++ and EC++ feature descriptions</b> .....	180
<b>EEC++ feature description</b> .....	183
Templates .....	183
<b>EC++ and C++ language extensions</b> .....	184
Application-related considerations .....	187
<b>Output format considerations</b> .....	187
<b>Stack considerations</b> .....	188
Stack alignment .....	188
Exception stack .....	188
<b>Heap considerations</b> .....	189
Advanced versus basic heap .....	189
<b>Interaction between the tools and your application</b> .....	190
<b>Checksum calculation</b> .....	192
<b>Linker optimizations</b> .....	196
<b>AEABI compliance</b> .....	196
Linking AEABI-compliant modules using the IAR ILINK linker ..	197
Linking AEABI-compliant modules using a third-party linker .....	198
Enabling AEABI compliance in the compiler .....	198
<b>CMSIS integration</b> .....	199
CMSIS DSP library .....	199
Customizing the CMSIS DSP library .....	199
Building with CMSIS on the command line .....	199
Building with CMSIS in the IDE .....	200



Efficient coding for embedded applications .....	201
<b>Selecting data types</b> .....	201
Using efficient data types .....	201
Anonymous structs and unions .....	203
<b>Controlling data and function placement in memory</b> .....	204
Data placement in registers .....	207
<b>Controlling compiler optimizations</b> .....	208
<b>Facilitating good code generation</b> .....	214
Accessing special function registers .....	217
Passing values between C and assembler objects .....	218
<b>Part 2. Reference information</b> .....	219
External interface details .....	221
<b>Invocation syntax</b> .....	221
<b>Include file search procedure</b> .....	223
<b>Compiler output</b> .....	224
<b>ILINK output</b> .....	226
<b>Diagnostics</b> .....	226
Compiler options .....	231
<b>Options syntax</b> .....	231
<b>Summary of compiler options</b> .....	233
<b>Descriptions of compiler options</b> .....	238
--aapcs .....	238
--aeabi .....	238
--align_sp_on_irq .....	239
--arm .....	239
--c89 .....	239
--char_is_signed .....	240
--char_is_unsigned .....	240
--cpu .....	240
--cpu_mode .....	241
--c++ .....	242

-D .....	242
--debug, -r .....	243
--dependencies .....	243
--diag_error .....	244
--diag_remark .....	244
--diag_suppress .....	245
--diag_warning .....	245
--diagnostics_tables .....	246
--discard_unused_publics .....	246
--dlib_config .....	246
-e .....	247
--ec++ .....	248
--ecc++ .....	248
--enable_hardware_workaround .....	248
--enable_multibytes .....	249
--enable_restrict .....	249
--endian .....	249
--enum_is_int .....	250
--error_limit .....	250
-f .....	250
--fpu .....	251
--guard_calls .....	251
--header_context .....	252
-I .....	252
--interwork .....	252
-l .....	253
--legacy .....	254
--lock_regs .....	254
--macro_positions_in_diagnostics .....	254
--make_all_definitions_weak .....	255
--mfc .....	255
--no_alignment_reduction .....	255
--no_clustering .....	256
--no_code_motion .....	256

--no_const_align .....	256
--no_cse .....	257
--no_exceptions .....	257
--no_fragments .....	258
--no_inline .....	258
--no_literal_pool .....	258
--no_loop_align .....	259
--no_mem_idioms .....	259
--no_path_in_file_macros .....	259
--no_rtti .....	260
--no_rw_dynamic_init .....	260
--no_scheduling .....	260
--no_size_constraints .....	261
--no_static_destruction .....	261
--no_system_include .....	261
--no_tbaa .....	262
--no_typedefs_in_diagnostics .....	262
--no_unaligned_access .....	262
--no_unroll .....	263
--no_warnings .....	263
--no_wrap_diagnostics .....	263
-O .....	264
--only_stdout .....	264
--output, -o .....	264
--predef_macros .....	265
--preinclude .....	265
--preprocess .....	265
--public_equ .....	266
--relaxed_fp .....	266
--remarks .....	267
--require_prototypes .....	267
--ropi .....	268
--rwpi .....	268
--section .....	269

--separate_cluster_for_initialized_variables .....	269
--silent .....	270
--strict .....	270
--system_include_dir .....	270
--thumb .....	271
--use_c++_inline .....	271
--use_unix_directory_separators .....	271
--vectorize .....	271
--vla .....	272
--warn_about_c_style_casts .....	272
--warnings_affect_exit_code .....	272
--warnings_are_errors .....	273
<b>Linker options .....</b>	<b>275</b>
<b>Summary of linker options .....</b>	<b>275</b>
<b>Descriptions of linker options .....</b>	<b>278</b>
--advanced_heap .....	278
--basic_heap .....	278
--BE8 .....	279
--BE32 .....	279
--call_graph .....	280
--config .....	280
--config_def .....	280
--cpp_init_routine .....	281
--cpu .....	281
--define_symbol .....	282
--dependencies .....	282
--diag_error .....	283
--diag_remark .....	283
--diag_suppress .....	283
--diag_warning .....	284
--diagnostics_tables .....	284
--enable_hardware_workaround .....	285
--enable_stack_usage .....	285

--entry .....	285
--error_limit .....	286
--exception_tables .....	286
--export_builtin_config .....	287
--extra_init .....	287
-f .....	287
--force_exceptions .....	288
--force_output .....	288
--image_input .....	289
--inline .....	289
--keep .....	290
--log .....	290
--log_file .....	291
--mangled_names_in_messages .....	291
--map .....	291
--merge_duplicate_sections .....	292
--no_dynamic_rtti_elimination .....	293
--no_exceptions .....	293
--no_fragments .....	293
--no_library_search .....	294
--no_literal_pool .....	294
--no_locals .....	295
--no_range_reservations .....	295
--no_remove .....	295
--no_veneers .....	296
--no_vfe .....	296
--no_warnings .....	296
--no_wrap_diagnostics .....	296
--only_stdout .....	297
--output, -o .....	297
--pi_veneers .....	297
--place_holder .....	298
--redirect .....	298
--remarks .....	298

--search .....	299
--semihosting .....	299
--silent .....	300
--skip_dynamic_initialization .....	300
--stack_usage_control .....	300
--strip .....	301
--threaded_lib .....	301
--vfe .....	301
--warnings_affect_exit_code .....	302
--warnings_are_errors .....	302
--whole_archive .....	302
Data representation .....	305
<b>Alignment</b> .....	305
Alignment on the ARM core .....	306
<b>Byte order</b> .....	306
<b>Basic data types—integer types</b> .....	307
<b>Basic data types—floating-point types</b> .....	312
<b>Pointer types</b> .....	313
Function pointers .....	313
Data pointers .....	314
<b>Structure types</b> .....	315
<b>Type qualifiers</b> .....	316
<b>Data types in C++</b> .....	318
Extended keywords .....	319
<b>General syntax rules for extended keywords</b> .....	319
<b>Summary of extended keywords</b> .....	322
<b>Descriptions of extended keywords</b> .....	323
__absolute .....	323
__arm .....	323
__big_endian .....	323
__fiq .....	324
__interwork .....	324
__intrinsic .....	324

__irq .....	325
__little_endian .....	325
__nested .....	325
__no_init .....	326
__noreturn .....	326
__packed .....	326
__ramfunc .....	328
__root .....	328
__stackless .....	328
__swi .....	329
__task .....	330
__thumb .....	330
__weak .....	331
Pragma directives .....	333
<b>Summary of pragma directives</b> .....	333
<b>Descriptions of pragma directives</b> .....	335
bitfields .....	335
calls .....	336
call_graph_root .....	337
data_alignment .....	337
default_function_attributes .....	338
default_variable_attributes .....	339
diag_default .....	340
diag_error .....	340
diag_remark .....	340
diag_suppress .....	341
diag_warning .....	341
error .....	341
include_alias .....	342
inline .....	342
language .....	343
location .....	344
message .....	345

object_attribute .....	345
optimize .....	346
pack .....	347
__printf_args .....	348
public_equ .....	348
required .....	349
rtmodel .....	349
__scanf_args .....	350
section .....	350
STDC CX_LIMITED_RANGE .....	351
STDC FENV_ACCESS .....	351
STDC FP_CONTRACT .....	352
swi_number .....	352
type_attribute .....	353
vectorize .....	353
weak .....	354
<b>Intrinsic functions</b> .....	<b>355</b>
<b>Summary of intrinsic functions</b> .....	<b>355</b>
Intrinsic functions for Neon instructions .....	361
<b>Descriptions of intrinsic functions</b> .....	<b>362</b>
__CLREX .....	362
__CLZ .....	362
__disable_fiq .....	362
__disable_interrupt .....	363
__disable_irq .....	363
__DMB .....	363
__DSB .....	363
__enable_fiq .....	363
__enable_interrupt .....	364
__enable_irq .....	364
__get_BASEPRI .....	364
__get_CONTROL .....	364
__get_CPSR .....	364



__get_FAULTMASK .....	365
__get_FPSCR .....	365
__get_interrupt_state .....	365
__get_IPSR .....	366
__get_LR .....	366
__get_MSP .....	366
__get_PRIMASK .....	366
__get_PSP .....	366
__get_PSR .....	367
__get_SB .....	367
__get_SP .....	367
__ISB .....	367
__LDC .....	367
__LDCL .....	367
__LDC2 .....	367
__LDC2L .....	367
__LDC_noidx .....	368
__LDCL_noidx .....	368
__LDC2_noidx .....	368
__LDC2L_noidx .....	368
__LDREX .....	369
__LDREXB .....	369
__LDREXD .....	369
__LDREXH .....	369
__MCR .....	369
__MCR2 .....	369
__MRC .....	370
__MRC2 .....	370
__no_operation .....	371
__PKHBT .....	371
__PKHTB .....	371
__PLD .....	372
__PLDW .....	372
__PLI .....	372

__QADD .....	372
__QDADD .....	372
__QDSUB .....	372
__QSUB .....	372
__QADD8 .....	373
__QADD16 .....	373
__QASX .....	373
__QSAX .....	373
__QSUB8 .....	373
__QSUB16 .....	373
__QCFlag .....	373
__QDOUBLE .....	373
__QFlag .....	374
__RBIT .....	374
__reset_Q_flag .....	374
__reset_QC_flag .....	374
__REV .....	375
__REV16 .....	375
__REVSH .....	375
__SADD8 .....	375
__SADD16 .....	375
__SASX .....	375
__SSAX .....	375
__SSUB8 .....	375
__SSUB16 .....	375
__SEL .....	375
__set_BASEPRI .....	376
__set_CONTROL .....	376
__set_CPSR .....	376
__set_FAULTMASK .....	376
__set_FPSCR .....	376
__set_interrupt_state .....	377
__set_LR .....	377
__set_MSP .....	377

__set_PRIMASK .....	377
__set_PSP .....	377
__set_SB .....	378
__set_SP .....	378
__SEV .....	378
__SHADD8 .....	378
__SHADD16 .....	378
__SHASX .....	378
__SHSAX .....	378
__SHSUB8 .....	378
__SHSUB16 .....	378
__SMLABB .....	379
__SMLABT .....	379
__SMLATB .....	379
__SMLATT .....	379
__SMLAWB .....	379
__SMLAWT .....	379
__SMLAD .....	379
__SMLADX .....	379
__SMLSD .....	379
__SMLSDX .....	379
__SMLALBB .....	380
__SMLALBT .....	380
__SMLALTB .....	380
__SMLALTT .....	380
__SMLALD .....	380
__SMLALDX .....	380
__SMLSLD .....	380
__SMLSLDX .....	380
__SMMLA .....	381
__SMMLAR .....	381
__SMMLS .....	381
__SMMLSR .....	381
__SMMUL .....	381

__SMMULR .....	381
__SMUAD .....	381
__SMUADX .....	381
__SMUSD .....	381
__SMUSDX .....	381
__SMUL .....	382
__SMULBB .....	382
__SMULBT .....	382
__SMULTB .....	382
__SMULTT .....	382
__SMULWB .....	382
__SMULWT .....	382
__SSAT .....	382
__SSAT16 .....	383
__STC .....	383
__STCL .....	383
__STC2 .....	383
__STC2L .....	383
__STC_noidx .....	384
__STCL_noidx .....	384
__STC2_noidx .....	384
__STC2L_noidx .....	384
__STREX .....	385
__STREXB .....	385
__STREXD .....	385
__STREXH .....	385
__SWP .....	385
__SWPB .....	385
__SXTAB .....	386
__SXTAB16 .....	386
__SXTAH .....	386
__SXTB16 .....	386
__UADD8 .....	386
__UADD16 .....	386

__UASX .....	386
__USAX .....	386
__USUB8 .....	386
__USUB16 .....	386
__UHADD8 .....	387
__UHADD16 .....	387
__UHASX .....	387
__UHSAX .....	387
__UHSUB8 .....	387
__UHSUB16 .....	387
__UMAAL .....	387
__UQADD8 .....	388
__UQADD16 .....	388
__UQASX .....	388
__UQSAX .....	388
__UQSUB8 .....	388
__UQSUB16 .....	388
__USAD8 .....	388
__USADA8 .....	388
__USAT .....	388
__USAT16 .....	389
__UXTAB .....	389
__UXTAB16 .....	389
__UXTAH .....	389
__UXTB16 .....	389
__WFE .....	389
__WFI .....	389
__YIELD .....	389
The preprocessor .....	391
<b>Overview of the preprocessor</b> .....	391
<b>Description of predefined preprocessor symbols</b> .....	392
__AAPCS__ .....	392
__AAPCS_VFP__ .....	392

__ARM_ADVANCED_SIMD__	392
__ARM_MEDIA__	392
__ARM_PROFILE_M__	393
__ARMVFP__	393
__ARMVFP_D16__	393
__ARMVFP_FP16__	393
__ARMVFP_SP__	393
__BASE_FILE__	394
__BUILD_NUMBER__	394
__CORE__	394
__cplusplus	394
__CPU_MODE__	394
__DATE__	394
__embedded_cplusplus	395
__FILE__	395
__func__	395
__FUNCTION__	395
__IAR_SYSTEMS_ICC__	395
__ICCarms__	396
__LINE__	396
__LITTLE_ENDIAN__	396
__PRETTY_FUNCTION__	396
__ROPI__	396
__RWPI__	396
__STDC__	397
__STDC_VERSION__	397
__TIME__	397
__VER__	397
<b>Descriptions of miscellaneous preprocessor extensions</b>	<b>397</b>
NDEBUG	397
#warning message	398

Library functions .....	399
<b>Library overview</b> .....	399
<b>IAR DLIB Library</b> .....	401
The linker configuration file .....	409
<b>Overview</b> .....	409
<b>Defining memories and regions</b> .....	410
Define memory directive .....	410
Define region directive .....	411
<b>Regions</b> .....	412
Region literal .....	412
Region expression .....	413
Empty region .....	414
<b>Section handling</b> .....	415
Define block directive .....	415
Define overlay directive .....	417
Initialize directive .....	418
Do not initialize directive .....	420
Keep directive .....	421
Place at directive .....	422
Place in directive .....	423
<b>Section selection</b> .....	423
Section-selectors .....	423
Extended-selectors .....	426
<b>Using symbols, expressions, and numbers</b> .....	427
Check that directive .....	427
Define symbol directive .....	428
Export directive .....	429
Expressions .....	429
Numbers .....	430
<b>Structural configuration</b> .....	431
If directive .....	431
Include directive .....	431

Section reference .....	433
<b>Summary of sections</b> .....	433
<b>Descriptions of sections and blocks</b> .....	434
.bss .....	434
CSTACK .....	434
.data .....	435
.data_init .....	435
__DLIB_PERTHREAD .....	435
.exc.text .....	435
HEAP .....	435
.iar.dynexit .....	436
.init_array .....	436
.intvec .....	436
IRQ_STACK .....	436
.noinit .....	437
.preinit_array .....	437
.prepreinit_array .....	437
.rodata .....	437
.text .....	437
.textrw .....	438
.textrw_init .....	438
The stack usage control file .....	439
<b>Overview</b> .....	439
<b>Stack usage control directives</b> .....	439
function directive .....	440
exclude directive .....	440
possible calls directive .....	441
call graph root directive .....	441
max recursion depth directive .....	442
no calls from directive .....	442
<b>Syntactic components</b> .....	443
<i>category</i> .....	443
<i>function-spec</i> .....	443



<i>module-spec</i> .....	443
<i>name</i> .....	444
<i>call-info</i> .....	444
<i>stack-size</i> .....	444
<i>size</i> .....	445
IAR utilities .....	447
<b>The IAR Archive Tool—iarchive</b> .....	447
<b>The IAR ELF Tool—ielftool</b> .....	450
<b>The IAR ELF Dumper—ielfdump</b> .....	452
<b>The IAR ELF Object Tool—iobjmanip</b> .....	453
<b>The IAR Absolute Symbol Exporter—ismexport</b> .....	456
Show directive .....	458
Hide directive .....	459
Rename directive .....	459
Diagnostic messages .....	460
<b>Descriptions of options</b> .....	461
--all .....	461
--bin .....	462
--checksum .....	462
--code .....	465
--create .....	465
--delete, -d .....	465
--edit .....	466
--extract, -x .....	466
-f .....	467
--fill .....	467
--ihex .....	468
--no_strtab .....	468
--output, -o .....	469
--parity .....	469
--ram_reserve_ranges .....	470
--raw .....	471
--remove_file_path .....	471

--remove_section .....	472
--rename_section .....	472
--rename_symbol .....	472
--replace, -r .....	473
--reserve_ranges .....	473
--section, -s .....	474
--self_reloc .....	475
--silent .....	475
--simple .....	475
--simple-ne .....	476
--srec .....	476
--srec-len .....	476
--srec-s3only .....	476
--strip .....	477
--symbols .....	477
--titxt .....	478
--toc, -t .....	478
--verbose, -V .....	478
Implementation-defined behavior for Standard C .....	479
<b>Descriptions of implementation-defined behavior</b> .....	479
Implementation-defined behavior for C89 .....	495
<b>Descriptions of implementation-defined behavior</b> .....	495
Index .....	507

# Tables

1: Typographic conventions used in this guide .....	34
2: Naming conventions used in this guide .....	35
3: Sections holding initialized data .....	82
4: Description of a relocation error .....	101
5: Customizable items .....	108
6: Formatters for printf .....	109
7: Formatters for scanf .....	110
8: Functions with special meanings when linked with debug library .....	113
9: Library configurations .....	121
10: Descriptions of printf configuration symbols .....	125
11: Descriptions of scanf configuration symbols .....	125
12: Low-level I/O files .....	126
13: Library objects using TLS .....	134
14: Macros for implementing TLS allocation .....	136
15: Example of runtime model attributes .....	138
16: Inline assembler operand constraints .....	145
17: Supported constraint modifiers .....	146
18: Operand modifiers and transformations .....	147
19: List of valid clobbers .....	149
20: Registers used for passing parameters .....	156
21: Registers used for returning values .....	158
22: Call frame information resources defined in a names block .....	161
23: Language extensions .....	167
24: Section operators and their symbols .....	170
25: Exception stacks for ARM7/9/11, Cortex-A, and Cortex-R .....	188
26: Compiler optimization levels .....	210
27: Compiler environment variables .....	223
28: ILINK environment variables .....	223
29: Error return codes .....	225
30: Compiler options summary .....	233
31: Linker options summary .....	275

32: Integer types .....	307
33: Floating-point types .....	312
34: Extended keywords summary .....	322
35: Pragma directives summary .....	333
36: Intrinsic functions summary .....	355
37: Traditional Standard C header files—DLIB .....	401
38: C++ header files .....	403
39: Standard template library header files .....	403
40: New Standard C header files—DLIB .....	404
41: Examples of section selector specifications .....	425
42: Section summary .....	433
43: iarchive parameters .....	448
44: iarchive commands summary .....	448
45: iarchive options summary .....	449
46: ielftool parameters .....	451
47: ielftool options summary .....	451
48: ielfdumparm parameters .....	452
49: ielfdumparm options summary .....	453
50: iobjmanip parameters .....	454
51: iobjmanip options summary .....	454
52: isymexport parameters .....	457
53: isymexport options summary .....	457
54: Message returned by sterror()—IAR DLIB library .....	494
55: Message returned by sterror()—IAR DLIB library .....	505

# Preface

Welcome to the *IAR C/C++ Development Guide for ARM*. The purpose of this guide is to provide you with detailed reference information that can help you to use the build tools to best suit your application requirements. This guide also gives you suggestions on coding techniques so that you can develop applications with maximum efficiency.

---

## Who should read this guide

Read this guide if you plan to develop an application using the C or C++ language for the ARM core and need detailed reference information on how to use the build tools. You should have working knowledge of:

### REQUIRED KNOWLEDGE

To use the tools in IAR Embedded Workbench, you should have working knowledge of:

- The architecture and instruction set of the ARM core (refer to the chip manufacturer's documentation)
- The C or C++ programming language
- Application development for embedded systems
- The operating system of your host computer.

For more information about the other development tools incorporated in the IDE, refer to their respective documentation, see *Other documentation*, page 31.

---

## How to use this guide

When you start using the IAR C/C++ compiler and linker for ARM, you should read *Part 1. Using the build tools* in this guide.

When you are familiar with the compiler and linker and have already configured your project, you can focus more on *Part 2. Reference information*.

If you are new to using this product, we suggest that you first read the guide *Getting Started with IAR Embedded Workbench®* for an overview of the tools and the features that the IDE offers. The tutorials, which you can find in IAR Information Center, will help you get started using IAR Embedded Workbench.

---

## What this guide contains

Below is a brief outline and summary of the chapters in this guide.

### PART I. USING THE BUILD TOOLS

- *Introduction to the IAR build tools* gives an introduction to the IAR build tools, which includes an overview of the tools, the programming languages, the available device support, and extensions provided for supporting specific features of the ARM core.
- *Developing embedded applications* gives the information you need to get started developing your embedded software using the IAR build tools.
- *Data storage* describes how to store data in memory.
- *Functions* gives a brief overview of function-related extensions—mechanisms for controlling functions—and describes some of these mechanisms in more detail.
- *Linking using ILINK* describes the linking process using the IAR ILINK Linker and the related concepts.
- *Linking your application* lists aspects that you must consider when linking your application, including using ILINK options and tailoring the linker configuration file.
- *The DLIB runtime environment* describes the DLIB runtime environment in which an application executes. It covers how you can modify it by setting options, overriding default library modules, or building your own library. The chapter also describes system initialization introducing the file `cstartup`, how to use modules for locale, and file I/O.
- *Assembler language interface* contains information required when parts of an application are written in assembler language. This includes the calling convention.
- *Using C* gives an overview of the two supported variants of the C language and an overview of the compiler extensions, such as extensions to Standard C.
- *Using C++* gives an overview of the two levels of C++ support: The industry-standard EC++ and IAR Extended EC++.
- *Application-related considerations* discusses a selected range of application issues related to using the compiler and linker.
- *Efficient coding for embedded applications* gives hints about how to write code that compiles to efficient code for an embedded application.

### PART 2. REFERENCE INFORMATION

- *External interface details* provides reference information about how the compiler and linker interact with their environment—the invocation syntax, methods for passing options to the compiler and linker, environment variables, the include file

search procedure, and the different types of compiler and linker output. The chapter also describes how the diagnostic system works.

- *Compiler options* explains how to set options, gives a summary of the options, and contains detailed reference information for each compiler option.
- *Linker options* gives a summary of the options, and contains detailed reference information for each linker option.
- *Data representation* describes the available data types, pointers, and structure types. This chapter also gives information about type and object attributes.
- *Extended keywords* gives reference information about each of the ARM-specific keywords that are extensions to the standard C/C++ language.
- *Pragma directives* gives reference information about the pragma directives.
- *Intrinsic functions* gives reference information about functions to use for accessing ARM-specific low-level features.
- *The preprocessor* gives a brief overview of the preprocessor, including reference information about the different preprocessor directives, symbols, and other related information.
- *Library functions* gives an introduction to the C or C++ library functions, and summarizes the header files.
- *The linker configuration file* describes the purpose of the linker configuration file and describes its contents.
- *Section reference* gives reference information about the use of sections.
- *The stack usage control file* describes the syntax and semantics of stack usage control files.
- *IAR utilities* describes the IAR utilities that handle the ELF and DWARF object formats.
- *Implementation-defined behavior for Standard C* describes how the compiler handles the implementation-defined areas of Standard C.
- *Implementation-defined behavior for C89* describes how the compiler handles the implementation-defined areas of the C language standard C89.

---

## Other documentation

User documentation is available as hypertext PDFs and as a context-sensitive online help system in HTML format. You can access the documentation from the Information Center or from the **Help** menu in the IAR Embedded Workbench IDE. The online help system is also available via the F1 key.

## USER AND REFERENCE GUIDES

The complete set of IAR Systems development tools is described in a series of guides. Information about:

- System requirements and information about how to install and register the IAR Systems products, is available in the booklet Quick Reference (available in the product box) and the *Installation and Licensing Guide*.
- Getting started using IAR Embedded Workbench and the tools it provides, is available in the guide *Getting Started with IAR Embedded Workbench®*.
- Using the IDE for project management and building, is available in the *IDE Project Management and Building Guide for ARM*.
- Using the IAR C-SPY® Debugger, is available in the *C-SPY® Debugging Guide for ARM*.
- Programming for the IAR C/C++ Compiler for ARM and linking using the IAR ILINK Linker, is available in the *IAR C/C++ Development Guide for ARM*.
- Programming for the IAR Assembler for ARM, is available in the *IAR Assembler User Guide for ARM*.
- Using the IAR DLIB Library, is available in the *DLIB Library Reference information*, available in the online help system.
- Porting application code and projects created with a previous version of the IAR Embedded Workbench for ARM, is available in the *IAR Embedded Workbench® Migration Guide*.
- Developing safety-critical applications using the MISRA C guidelines, is available in the *IAR Embedded Workbench® MISRA C:2004 Reference Guide* or the *IAR Embedded Workbench® MISRA C:1998 Reference Guide*.
- Using I-jet, refer to the *IAR Debugging probes Guide for I-jet®, I-jet Trace, and I-scope*.
- Using JTAGjet-Trace, refer to the *JTAGjet-Trace User Guide for ARM*.
- Using IAR J-Link and IAR J-Trace, refer to the *IAR J-Link and IAR J-Trace User Guide for JTAG Emulators for ARM Cores*.

**Note:** Additional documentation might be available depending on your product installation.

## THE ONLINE HELP SYSTEM

The context-sensitive online help contains:

- Information about project management, editing, and building in the IDE
- Information about debugging using the IAR C-SPY® Debugger
- Information about using the editor



- Reference information about the menus, windows, and dialog boxes in the IDE
- Compiler reference information
- Keyword reference information for the DLIB library functions. To obtain reference information for a function, select the function name in the editor window and press F1.

## FURTHER READING

These books might be of interest to you when using the IAR Systems development tools:

- Seal, David, and David Jagger. *ARM Architecture Reference Manual*. Addison-Wesley
- Barr, Michael, and Andy Oram, ed. *Programming Embedded Systems in C and C++*. O'Reilly & Associates.
- Furber, Steve, *ARM System-on-Chip Architecture*. Addison-Wesley.
- Harbison, Samuel P. and Guy L. Steele (contributor). *C: A Reference Manual*. Prentice Hall.
- Josuttis, Nicolai M. *The C++ Standard Library: A Tutorial and Reference*. Addison-Wesley.
- Kernighan, Brian W. and Dennis M. Ritchie. *The C Programming Language*. Prentice Hall.
- Labrosse, Jean J. *Embedded Systems Building Blocks: Complete and Ready-To-Use Modules in C*. R&D Books.
- Lippman, Stanley B. and Josée Lajoie. *C++ Primer*. Addison-Wesley.
- Mann, Bernhard. *C für Mikrocontroller*. Franzis-Verlag. [Written in German.]
- Meyers, Scott. *Effective C++: 50 Specific Ways to Improve Your Programs and Designs*. Addison-Wesley.
- Meyers, Scott. *More Effective C++*. Addison-Wesley.
- Meyers, Scott. *Effective STL*. Addison-Wesley.
- Sloss, Andrew N. et al, *ARM System Developer's Guide: Designing and Optimizing System Software*. Morgan Kaufmann.
- Stroustrup, Bjarne. *The C++ Programming Language*. Addison-Wesley.
- Stroustrup, Bjarne. *Programming Principles and Practice Using C++*. Addison-Wesley.
- Sutter, Herb. *Exceptional C++: 47 Engineering Puzzles, Programming Problems, and Solutions*. Addison-Wesley.

## WEB SITES

Recommended web sites:

- The Advanced RISC Machines Ltd web site, [www.arm.com](http://www.arm.com), that contains information and news about the ARM cores.
- The IAR Systems web site, [www.iar.com](http://www.iar.com), that holds application notes and other product information.
- The web site of the C standardization working group, [www.open-std.org/jtc1/sc22/wg14](http://www.open-std.org/jtc1/sc22/wg14).
- The web site of the C++ Standards Committee, [www.open-std.org/jtc1/sc22/wg21](http://www.open-std.org/jtc1/sc22/wg21).
- Finally, the Embedded C++ Technical Committee web site, [www.caravan.net/ec2plus](http://www.caravan.net/ec2plus), that contains information about the Embedded C++ standard.

---

## Document conventions

When, in the IAR Systems documentation, we refer to the programming language C, the text also applies to C++, unless otherwise stated.

When referring to a directory in your product installation, for example `arm\doc`, the full path to the location is assumed, for example `c:\Program Files\IAR Systems\Embedded Workbench 7.n\arm\doc`.

## TYPOGRAPHIC CONVENTIONS

The IAR Systems documentation set uses the following typographic conventions:

Style	Used for
<code>computer</code>	<ul style="list-style-type: none"> <li>• Source code examples and file paths.</li> <li>• Text on the command line.</li> <li>• Binary, hexadecimal, and octal numbers.</li> </ul>
<i>parameter</i>	A placeholder for an actual value used as a parameter, for example <i>filename.h</i> where <i>filename</i> represents the name of the file.
[option]	An optional part of a directive, where [ and ] are not part of the actual directive, but any [, ], {, or } are part of the directive syntax.
{option}	A mandatory part of a directive, where { and } are not part of the actual directive, but any [, ], {, or } are part of the directive syntax.
[option]	An optional part of a command.
[a b c]	An optional part of a command with alternatives.
{a b c}	A mandatory part of a command with alternatives.

Table 1: Typographic conventions used in this guide





Style	Used for
<b>bold</b>	Names of menus, menu commands, buttons, and dialog boxes that appear on the screen.
<i>italic</i>	<ul style="list-style-type: none"> <li>• A cross-reference within this guide or to another guide.</li> <li>• Emphasis.</li> </ul>
...	An ellipsis indicates that the previous item can be repeated an arbitrary number of times.
	Identifies instructions specific to the IAR Embedded Workbench® IDE interface.
	Identifies instructions specific to the command line interface.
	Identifies helpful tips and programming hints.
	Identifies warnings.

Table 1: Typographic conventions used in this guide (Continued)

## NAMING CONVENTIONS

The following naming conventions are used for the products and tools from IAR Systems®, when referred to in the documentation:

Brand name	Generic term
IAR Embedded Workbench® for ARM	IAR Embedded Workbench®
IAR Embedded Workbench® IDE for ARM	the IDE
IAR C-SPY® Debugger for ARM	C-SPY, the debugger
IAR C-SPY® Simulator	the simulator
IAR C/C++ Compiler™ for ARM	the compiler
IAR Assembler™ for ARM	the assembler
IAR ILINK Linker™	ILINK, the linker
IAR DLIB Library™	the DLIB library


Table 2: Naming conventions used in this guide



# Part I. Using the build tools

This part of the *IAR C/C++ Development Guide for ARM* includes these chapters:

- Introduction to the IAR build tools
- Developing embedded applications
- Data storage
- Functions
- Linking using ILINK
- Linking your application
- The DLIB runtime environment
- Assembler language interface
- Using C
- Using C++
- Application-related considerations
- Efficient coding for embedded applications.

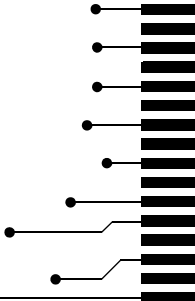



# Introduction to the IAR build tools

- The IAR build tools—an overview
- IAR language overview
- Device support
- Special support for embedded systems

---

## The IAR build tools—an overview

In the IAR product installation you can find a set of tools, code examples, and user documentation, all suitable for developing software for ARM-based embedded applications. The tools allow you to develop your application in C, C++, or in assembler language.



IAR Embedded Workbench® is a very powerful Integrated Development Environment (IDE) that allows you to develop and manage complete embedded application projects. It provides an easy-to-learn and highly efficient development environment with maximum code inheritance capabilities, comprehensive and specific target support. IAR Embedded Workbench promotes a useful working methodology, and thus a significant reduction of the development time.

For information about the IDE, see the *IDE Project Management and Building Guide for ARM*.



The compiler, assembler, and linker can also be run from a command line environment, if you want to use them as external tools in an already established project environment.

### IAR C/C++ COMPILER

The IAR C/C++ Compiler for ARM is a state-of-the-art compiler that offers the standard features of the C and C++ languages, plus extensions designed to take advantage of the ARM-specific facilities.

## IAR ASSEMBLER

The IAR Assembler for ARM is a powerful relocating macro assembler with a versatile set of directives and expression operators. The assembler features a built-in C language preprocessor and supports conditional assembly.

The IAR Assembler for ARM uses the same mnemonics and operand syntax as the Advanced RISC Machines Ltd ARM Assembler, which simplifies the migration of existing code. For more information, see the *IAR Assembler User Guide for ARM*.

## THE IAR ILINK LINKER

The IAR ILINK Linker for ARM is a powerful, flexible software tool for use in the development of embedded controller applications. It is equally well suited for linking small, single-file, absolute assembler programs as it is for linking large, relocatable input, multi-module, C/C++, or mixed C/C++ and assembler programs.

## SPECIFIC ELF TOOLS

ILINK both uses and produces industry-standard ELF and DWARF as object format, additional IAR utilities that handle these formats are provided:

- The IAR Archive Tool—`iarchive`—creates and manipulates a library (archive) of several ELF object files
- The IAR ELF Tool—`ielftool`—performs various transformations on an ELF executable image (such as, fill, checksum, format conversion etc)
- The IAR ELF Dumper for ARM—`ielfdumparm`—creates a text representation of the contents of an ELF relocatable or executable image
- The IAR ELF Object Tool—`iobjmanip`—is used for performing low-level manipulation of ELF object files
- The IAR Absolute Symbol Exporter—`isymexport`—exports absolute symbols from a ROM image file, so that they can be used when linking an add-on application.

**Note:** These ELF utilities are well-suited for object files produced by the tools from IAR Systems. Thus, we recommend using them instead of the GNU binary utilities.

## EXTERNAL TOOLS

For information about how to extend the tool chain in the IDE, see the *IDE Project Management and Building Guide for ARM*.



---

## IAR language overview

The IAR C/C++ Compiler for ARM supports:

- C, the most widely used high-level programming language in the embedded systems industry. You can build freestanding applications that follow these standards:
  - Standard C—also known as C99. Hereafter, this standard is referred to as *Standard C* in this guide.
  - C89—also known as C94, C90, C89, and ANSI C. This standard is required when MISRA C is enabled.
- C++, a modern object-oriented programming language with a full-featured library well suited for modular programming. Any of these standards can be used:
  - Standard C++—can be used with different levels of support for exceptions and runtime type information (RTTI).
  - Embedded C++ (EC++)—a subset of the C++ programming standard, which is intended for embedded systems programming. It is defined by an industry consortium, the Embedded C++ Technical committee. See the chapter *Using C++*.
  - IAR Extended Embedded C++ (EEC++)—EC++ with additional features such as full template support, multiple inheritance, namespace support, the new cast operators, as well as the Standard Template Library (STL).

Each of the supported languages can be used in *strict* or *relaxed* mode, or relaxed with IAR extensions enabled. The strict mode adheres to the standard, whereas the relaxed mode allows some common deviations from the standard.

For more information about C, see the chapter *Using C*.

For more information about C++, Embedded C++, and Extended Embedded C++, see the chapter *Using C++*.

For information about how the compiler handles the implementation-defined areas of the languages, see the chapter *Implementation-defined behavior for Standard C*.

It is also possible to implement parts of the application, or the whole application, in assembler language. See the *IAR Assembler User Guide for ARM*.

---

## Device support

To get a smooth start with your product development, the IAR product installation comes with a wide range of device-specific support.

## SUPPORTED ARM DEVICES

The IAR C/C++ Compiler for ARM supports several different ARM cores and devices based on the instruction sets version 4, 5, 6, 6M, and 7. The object code that the compiler generates is not always binary compatible between the cores. Therefore it is crucial to specify a processor option to the compiler. The default core is ARM7TDMI

## PRECONFIGURED SUPPORT FILES

The IAR product installation contains preconfigured files for supporting different devices. If you need additional files for device support, they can be created using one of the provided ones as a template.

### Header files for I/O

Standard peripheral units are defined in device-specific I/O header files with the filename extension `h`. The product package supplies I/O files for all devices that are available at the time of the product release. You can find these files in the `arm\inc\<vendor>` directory. Make sure to include the appropriate include file in your application source files. If you need additional I/O header files, they can be created using one of the provided ones as a template. For detailed information about the header file format, see `EWARM_HeaderFormat.pdf` located in the `arm\doc` directory.

### Linker configuration files

The `arm\config` directory contains ready-made linker configuration files for all supported devices. The files have the filename extension `icf` and contain the information required by the linker. For more information about the linker configuration file, see *Placing code and data—the linker configuration file*, page 79, and for reference information, the chapter *The linker configuration file*.

### Device description files

The debugger handles several of the device-specific requirements, such as definitions of available memory areas, peripheral registers and groups of these, by using device description files. These files are located in the `arm\config` directory and they have the filename extension `ddf`. The peripheral registers and groups of these can be defined in separate files (filename extension `sfr`), which in that case are included in the `ddf` file. For more information about these files, see the *C-SPY® Debugging Guide for ARM* and `EWARM_DDFFORMAT.pdf` located in the `arm\doc` directory.

## EXAMPLES FOR GETTING STARTED

The `arm\examples` directory contains several hundreds of examples of working applications to give you a smooth start with your development. The complexity of the

examples ranges from simple LED blink to USB mass storage controllers. Examples are provided for most of the supported devices.

---

## Special support for embedded systems

This section briefly describes the extensions provided by the compiler to support specific features of the ARM core.

### EXTENDED KEYWORDS

The compiler provides a set of keywords that can be used for configuring how the code is generated. For example, there are keywords for declaring special function types.

By default, language extensions are enabled in the IDE.

The command line option `-e` makes the extended keywords available, and reserves them so that they cannot be used as variable names. See, `-e`, page 247 for additional information.

For more information about the extended keywords, see the chapter *Extended keywords*. See also, *Data storage*, page 59 and *Functions*, page 63.

### PRAGMA DIRECTIVES

The pragma directives control the behavior of the compiler, for example how it allocates memory, whether it allows extended keywords, and whether it issues warning messages.

The pragma directives are always enabled in the compiler. They are consistent with standard C, and are very useful when you want to make sure that the source code is portable.

For more information about the pragma directives, see the chapter *Pragma directives*.

### PREDEFINED SYMBOLS

With the predefined preprocessor symbols, you can inspect your compile-time environment, for example the CPU mode and time of compilation.

For more information about the predefined symbols, see the chapter *The preprocessor*.

### ACCESSING LOW-LEVEL FEATURES

For hardware-related parts of your application, accessing low-level features is essential. The compiler supports several ways of doing this: intrinsic functions, mixing C and assembler modules, and inline assembler. For information about the different methods, see *Mixing C and assembler*, page 141.



# Developing embedded applications

- Developing embedded software using IAR build tools
- The build process—an overview
- Application execution—an overview
- Building applications—an overview
- Basic project configuration

---

## Developing embedded software using IAR build tools

Typically, embedded software written for a dedicated microcontroller is designed as an endless loop waiting for some external events to happen. The software is located in ROM and executes on reset. You must consider several hardware and software factors when you write this kind of software.

### MAPPING OF MEMORY

Embedded systems typically contain various types of memory, such as on-chip RAM, external DRAM or SRAM, ROM, EEPROM, or flash memory.

As an embedded software developer, you must understand the features of the different types of memory. For example, on-chip RAM is often faster than other types of memories, and variables that are accessed often would in time-critical applications benefit from being placed here. Conversely, some configuration data might be accessed seldom but must maintain their value after power off, so they should be saved in EEPROM or flash memory.

For efficient memory usage, the compiler provides several mechanisms for controlling placement of functions and data objects in memory. For more information, see *Controlling data and function placement in memory*, page 204. The linker places sections of code and data in memory according to the directives you specify in the linker configuration file, see *Placing code and data—the linker configuration file*, page 79.

## COMMUNICATION WITH PERIPHERAL UNITS

If external devices are connected to the microcontroller, you might need to initialize and control the signalling interface, for example by using chip select pins, and detect and handle external interrupt signals. Typically, this must be initialized and controlled at runtime. The normal way to do this is to use special function registers (SFR). These are typically available at dedicated addresses, containing bits that control the chip configuration.

Standard peripheral units are defined in device-specific I/O header files with the filename extension `.h`. See *Device support*, page 41. For an example, see *Accessing special function registers*, page 217.

## EVENT HANDLING

In embedded systems, using *interrupts* is a method for handling external events immediately; for example, detecting that a button was pressed. In general, when an interrupt occurs in the code, the core immediately stops executing the code it runs, and starts executing an interrupt routine instead.

The compiler provides various primitives for managing hardware and software interrupts, which means that you can write your interrupt routines in C, see *Interrupt functions for Cortex-M devices*, page 65 and *Interrupt functions for ARM7/9/11, Cortex-A, and Cortex-R devices*, page 66.

## SYSTEM STARTUP

In all embedded systems, system startup code is executed to initialize the system—both the hardware and the software system—before the `main` function of the application is called. The CPU imposes this by starting execution from a fixed memory address.

As an embedded software developer, you must ensure that the startup code is located at the dedicated memory addresses, or can be accessed using a pointer from the vector table. This means that startup code and the initial vector table must be placed in non-volatile memory, such as ROM, EPROM, or flash.

A C/C++ application further needs to initialize all global variables. This initialization is handled by the linker and the system startup code in conjunction. For more information, see *Application execution—an overview*, page 50.

## REAL-TIME OPERATING SYSTEMS

In many cases, the embedded application is the only software running in the system. However, using an RTOS has some advantages.

For example, the timing of high-priority tasks is not affected by other parts of the program which are executed in lower priority tasks. This typically makes a program

more deterministic and can reduce power consumption by using the CPU efficiently and putting the CPU in a lower-power state when idle.

Using an RTOS can make your program easier to read and maintain, and in many cases smaller as well. Application code can be cleanly separated in tasks which are truly independent of each other. This makes teamwork easier, as the development work can be easily split into separate tasks which are handled by one developer or a group of developers.

Finally, using an RTOS reduces the hardware dependence and creates a clean interface to the application, making it easier to port the program to different target hardware.

## INTEROPERABILITY WITH OTHER BUILD TOOLS

The IAR compiler and linker provide support for AEABI, the Embedded Application Binary Interface for ARM. For more information about this interface specification, see the [www.arm.com](http://www.arm.com) web site.

The advantage of this interface is the interoperability between vendors supporting it; an application can be built up of libraries of object files produced by different vendors and linked with a linker from any vendor, as long as they adhere to the AEABI standard.

AEABI specifies full compatibility for C and C++ object code, and for the C library. The AEABI does not include specifications for the C++ library.

For more information about the AEABI support in the IAR build tools, see *AEABI compliance*, page 196.

The ARM IAR build tools with version numbers from 6.xx and up are not fully compatible with earlier versions of the product, see the *IAR Embedded Workbench® Migration Guide for ARM®* for more information.

For more information, see *Linker optimizations*, page 196.

---

## The build process—an overview

This section gives an overview of the build process; how the various build tools—compiler, assembler, and linker—fit together, going from source code to an executable image.

To get familiar with the process in practice, you should run one or more of the tutorials available from the IAR Information Center.


## THE TRANSLATION PROCESS

There are two tools in the IDE that translate application source files to intermediary object files. The IAR C/C++ Compiler and the IAR Assembler. Both produce

relocatable object files in the industry-standard format ELF, including the DWARF format for debug information.

**Note:** The compiler can also be used for translating C/C++ source code into assembler source code. If required, you can modify the assembler source code which then can be assembled into object code. For more information about the IAR Assembler, see the *IAR Assembler User Guide for ARM*.

This illustration shows the translation process:

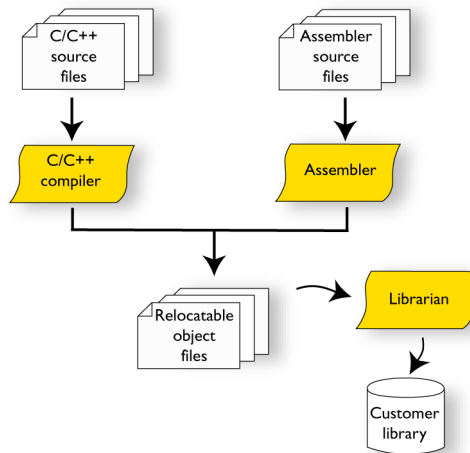

After the translation, you can choose to pack any number of modules into an archive, or in other words, a library. The important reason you should use libraries is that each module in a library is conditionally linked in the application, or in other words, is only included in the application if the module is used directly or indirectly by a module supplied as an object file. Optionally, you can create a library; then use the IAR utility `iarchive`.

## THE LINKING PROCESS

The relocatable modules, in object files and libraries, produced by the IAR compiler and assembler cannot be executed as is. To become an executable application, they must be *linked*.


**Note:** Modules produced by a toolset from another vendor can be included in the build as well. Be aware that this also might require a compiler utility library from the same vendor.



The IAR ILINK Linker (`ilinkarm.exe`) is used for building the final application. Normally, the linker requires the following information as input:

- Several object files and possibly certain libraries
- A program start label (set by default)
- The linker configuration file that describes placement of code and data in the memory of the target system

This illustration shows the linking process:

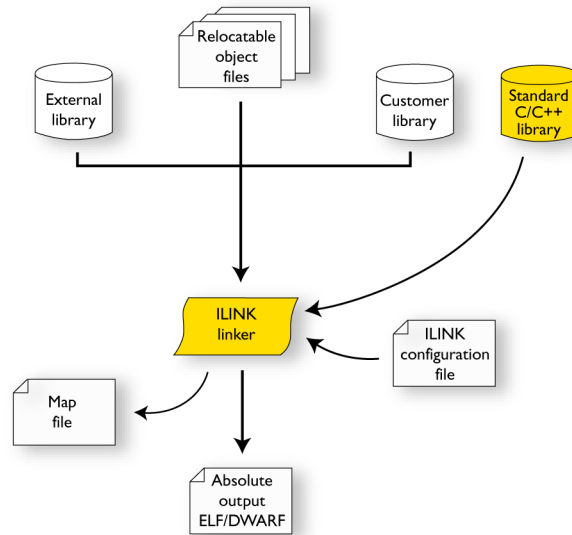

**Note:** The Standard C/C++ library contains support routines for the compiler, and the implementation of the C/C++ standard library functions.

During the linking, the linker might produce error messages and logging messages on `stdout` and `stderr`. The log messages are useful for understanding why an application was linked the way it was, for example, why a module was included or a section removed.


For more information about the procedure performed by the linker, see *The linking process in detail*, page 77.

## AFTER LINKING

The IAR ILINK Linker produces an absolute object file in ELF format that contains the executable image. After linking, the produced absolute executable image can be used for:

- Loading into the IAR C-SPY Debugger or any other compatible external debugger that reads ELF and DWARF.
- Programming to a flash/PROM using a flash/PROM programmer. Before this is possible, the actual bytes in the image must be converted into the standard Motorola 32-bit S-record format or the Intel Hex-32 format. For this, use `ielftool`, see *The IAR ELF Tool—ielftool*, page 450.

This illustration shows the possible uses of the absolute output ELF/DWARF file:

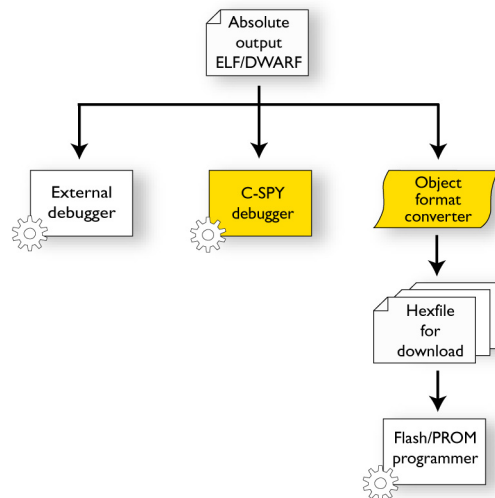


---

## Application execution—an overview

### THE INITIALIZATION PHASE

Initialization is executed when an application is started (the CPU is reset) but before the `main` function is entered. The initialization phase can for simplicity be divided into:

- Hardware initialization, which generally at least initializes the stack pointer. The hardware initialization is typically performed in the system startup code `cstartup.s` and if required, by an extra low-level routine that you provide. It might

include resetting/starting the rest of the hardware, setting up the CPU, etc, in preparation for the software C/C++ system initialization.

- Software C/C++ system initialization

Typically, this includes assuring that every global (statically linked) C/C++ symbol receives its proper initialization value before the `main` function is called.


- Application initialization

This depends entirely on your application. It can include setting up an RTOS kernel and starting initial tasks for an RTOS-driven application. For a bare-bone application, it can include setting up various interrupts, initializing communication, initializing devices, etc.


For a ROM/flash-based system, constants and functions are already placed in ROM. All symbols placed in RAM must be initialized before the `main` function is called. The linker has already divided the available RAM into different areas for variables, stack, heap, etc.

The following sequence of illustrations gives a simplified overview of the different stages of the initialization.

- 1 When an application is started, the system startup code first performs hardware initialization, such as initialization of the stack pointer to point at the end of the predefined stack area:

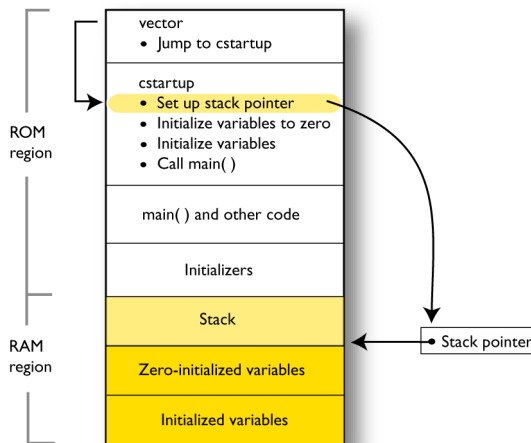


- Then, memories that should be zero-initialized are cleared, in other words, filled with zeros:

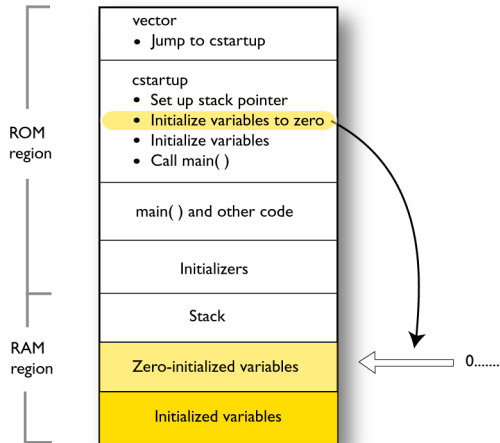


Typically, this is data referred to as *zero-initialized data*; variables declared as, for example, `int i = 0;`

- For *initialized data*, data declared, for example, like `int i = 6;` the initializers are copied from ROM to RAM:

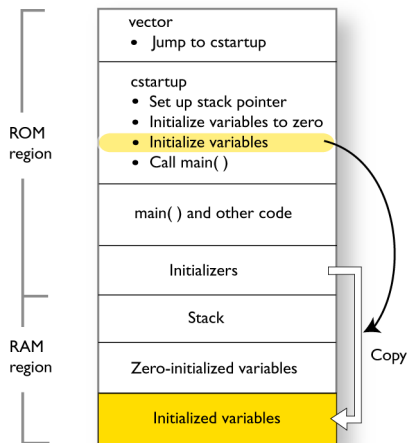

4 Finally, the `main` function is called:

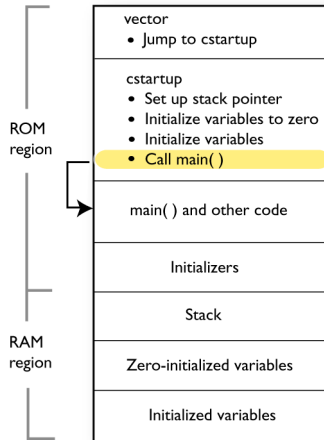

For more information about each stage, see *System startup and termination*, page 117. For more information about initialization of data, see *Initialization at system startup*, page 81.

## THE EXECUTION PHASE

The software of an embedded application is typically implemented as a loop which is either interrupt-driven or uses polling for controlling external interaction or internal events. For an interrupt-driven system, the interrupts are typically initialized at the beginning of the `main` function.

In a system with real-time behavior and where responsiveness is critical, a multi-task system might be required. This means that your application software should be complemented with a real-time operating system. In this case, the RTOS and the different tasks must also be initialized at the beginning of the `main` function.

## THE TERMINATION PHASE

Typically, the execution of an embedded application should never end. If it does, you must define a proper end behavior.

To terminate an application in a controlled way, either call one of the Standard C library functions `exit`, `_Exit`, or `abort`, or return from `main`. If you return from `main`, the `exit` function is executed, which means that C++ destructors for static and global variables are called (C++ only) and all open files are closed.

Of course, in case of incorrect program logic, the application might terminate in an uncontrolled and abnormal way—a system crash.

For more information about this, see *System termination*, page 119.

## Building applications—an overview

In the command line interface, this line compiles the source file `myfile.c` into the object file `myfile.o` using the default settings:

```
iccarm myfile.c
```

You must also specify some critical options, see *Basic project configuration*, page 54.

On the command line, this line can be used for starting the linker:

```
ilinkarm myfile.o myfile2.o -o a.out --config my_configfile.icf
```

In this example, `myfile.o` and `myfile2.o` are object files, and `my_configfile.icf` is the linker configuration file. The option `-o` specifies the name of the output file.

**Note:** By default, the label where the application starts is `__iar_program_start`. You can use the `--entry` command line option to change this.



When building a project, the IAR Embedded Workbench IDE can produce extensive build information in the Build messages window. This information can be useful, for example, as a base for producing batch files for building on the command line. You can copy the information and paste it in a text file. To activate extensive build information, choose **Tools>Options> Messages** and select the option **Show build messages: All**.

## Basic project configuration

This section gives an overview of the basic settings for the project setup that are needed to make the compiler and linker generate the best code for the ARM device you are using. You can specify the options either from the command line interface or in the IDE.

You need to make settings for:

- Processor configuration, that is processor variant, CPU mode, interworking, VFP and floating-point arithmetic, and byte order
- Optimization settings
- Runtime environment
- Customizing the ILINK configuration, see the chapter *Linking your application*.

In addition to these settings, many other options and settings can fine-tune the result even further. For information about how to set options and for a list of all available

options, see the chapters *Compiler options*, *Linker options*, and the *IDE Project Management and Building Guide for ARM*, respectively.

## PROCESSOR CONFIGURATION

To make the compiler generate optimum code, you should configure it for the ARM core you are using.

### Processor variant

The IAR C/C++ Compiler for ARM supports several different ARM cores and devices based on the instruction sets version 4, 5, 6, and 7. All supported cores support Thumb instructions and 64-bit multiply instructions. The object code that the compiler generates is not always binary compatible between the cores. Therefore it is crucial to specify a processor option to the compiler. The default core is ARM7TDMI.



See the *IDE Project Management and Building Guide for ARM*, for information about setting the **Processor variant** option in the IDE.



Use the `--cpu` option to specify the ARM core; see `--arm`, page 239 and `--thumb`, page 271, for syntax information.

### Interworking

When code is compiled with the `--interwork` option, ARM and Thumb code can be freely mixed. Interworking functions can be called from both ARM and Thumb code. Interworking is default for devices based on the instruction sets version 5, 6, and 7, or when using the `--aeabi` compiler option. See also *Veneers*, page 100.



See the *IDE Project Management and Building Guide for ARM* for information about setting the **Generate interwork code** option in the IDE.



Use the `--interwork` option to specify interworking capabilities for your project; see `--interwork`, page 252, for syntax information.

### VFP and floating-point arithmetic

If you are using an ARM core that contains a Vector Floating Point (VFP) coprocessor, you can use the `--fpu` option to generate code that carries out floating-point operations utilizing the coprocessor, instead of using the software floating-point library routines.



See the *IDE Project Management and Building Guide for ARM*, for information about setting the **FPU** option in the IDE.



Use the `--fpu` option to specify the ARM core; see `--fpu`, page 251 for syntax information.

## Byte order

The compiler supports the big-endian and little-endian byte order. All user and library modules in your application must use the same byte order.



See the *IDE Project Management and Building Guide for ARM* for information about setting the **Endian mode** option in the IDE.



Use the `--endian` option to specify the byte order for your project; see `--endian`, page 249, for syntax information.

## OPTIMIZATION FOR SPEED AND SIZE

The compiler's optimizer performs, among other things, dead-code elimination, constant propagation, inlining, common sub-expression elimination, static clustering, instruction scheduling, and precision reduction. It also performs loop optimizations, such as induction variable elimination.

You can decide between several optimization levels and for the highest level you can choose between different optimization goals—*size*, *speed*, or *balanced*. Most optimizations will make the application both smaller and faster. However, when this is not the case, the compiler uses the selected optimization goal to decide how to perform the optimization.

The optimization level and goal can be specified for the entire application, for individual files, and for individual functions. In addition, some individual optimizations, such as function inlining, can be disabled.

For information about compiler optimizations and for more information about efficient coding techniques, see the chapter *Efficient coding for embedded applications*.

## RUNTIME ENVIRONMENT

To create the required runtime environment you should choose a runtime library and set library options. You might also need to override certain library modules with your own customized versions. The runtime library provided is the IAR DLIB Library.

To set up an efficient runtime environment you need a good understanding of the various features, see the chapter *The DLIB runtime environment*.



### Setting up for the runtime environment in the IDE

The library is automatically chosen according to the settings you make in **Project>Options>General Options**, on the pages **Target**, **Library Configuration**, **Library Options**. A correct include path is automatically set up for the system header files and for the device-specific include files.



Note that for the DLIB library there are different configurations— Normal and Full—which include different levels of support for locale, file descriptors, multibyte characters, etc. See *Library configurations*, page 121, for more information.



### Setting up for the runtime environment from the command line

You do not have to specify a library file explicitly, as ILINK automatically uses the correct library file.

A library configuration file that matches the library object file is automatically used. To explicitly specify a library configuration, use the `--dlib_config` option.

In addition to these options you might want to specify any application-specific linker options or the include path to application-specific header files by using the `-I` option, for example:

```
-I MyApplication\inc
```

For information about the prebuilt library object files, see *Using prebuilt libraries*, page 105.

### Setting library and runtime environment options

You can set certain options to reduce the library and runtime environment size:

- The formatters used by the functions `printf`, `scanf`, and their variants, see *Choosing formatters for printf and scanf*, page 108.
- The size of the stack and the heap, see *Setting up stack memory*, page 95, and *Setting up heap memory*, page 95, respectively.



# Data storage

- Introduction
- Storage of auto variables and parameters
- Dynamic memory on the heap

---

## Introduction

An ARM core can address 4 Gbytes of continuous memory, ranging from 0x00000000 to 0xFFFFFFFF. Different types of physical memory can be placed in the memory range. A typical application will have both read-only memory (ROM) and read/write memory (RAM). In addition, some parts of the memory range contain processor control registers and peripheral units.

### DIFFERENT WAYS TO STORE DATA

In a typical application, data can be stored in memory in three different ways:

- Auto variables

All variables that are local to a function, except those declared static, are stored either in registers or on the stack. These variables can be used as long as the function executes. When the function returns to its caller, the memory space is no longer valid. For more information, see *Storage of auto variables and parameters*, page 60.
- Global variables, module-static variables, and local variables declared `static`

In this case, the memory is allocated once and for all. The word static in this context means that the amount of memory allocated for this kind of variables does not change while the application is running. The ARM core has one single address space and the compiler supports full memory addressing.
- Dynamically allocated data.

An application can allocate data on the *heap*, where the data remains valid until it is explicitly released back to the system by the application. This type of memory is useful when the number of objects is not known until the application executes. Note that there are potential risks connected with using dynamically allocated data in systems with a limited amount of memory, or systems that are expected to run for a long time. For more information, see *Dynamic memory on the heap*, page 61.

---

## Storage of auto variables and parameters

Variables that are defined inside a function—and not declared static—are named auto variables by the C standard. A few of these variables are placed in processor registers; the rest are placed on the stack. From a semantic point of view, this is equivalent. The main differences are that accessing registers is faster, and that less memory is required compared to when variables are located on the stack.

Auto variables can only live as long as the function executes; when the function returns, the memory allocated on the stack is released.

### THE STACK

The stack can contain:

- Local variables and parameters not stored in registers
- Temporary results of expressions
- The return value of a function (unless it is passed in registers)
- Processor state during interrupts
- Processor registers that should be restored before the function returns (callee-save registers).

The stack is a fixed block of memory, divided into two parts. The first part contains allocated memory used by the function that called the current function, and the function that called it, etc. The second part contains free memory that can be allocated. The borderline between the two areas is called the top of stack and is represented by the stack pointer, which is a dedicated processor register. Memory is allocated on the stack by moving the stack pointer.

A function should never refer to the memory in the area of the stack that contains free memory. The reason is that if an interrupt occurs, the called interrupt function can allocate, modify, and—of course—deallocate memory on the stack.

See also *Stack considerations*, page 188 and *Setting up stack memory*, page 95.

### Advantages

The main advantage of the stack is that functions in different parts of the program can use the same memory space to store their data. Unlike a heap, a stack will never become fragmented or suffer from memory leaks.

It is possible for a function to call itself either directly or indirectly—a recursive function—and each invocation can store its own data on the stack.

## Potential problems

The way the stack works makes it impossible to store data that is supposed to live after the function returns. The following function demonstrates a common programming mistake. It returns a pointer to the variable `x`, a variable that ceases to exist when the function returns.

```
int *MyFunction()
{
    int x;
    /* Do something here. */
    return &x; /* Incorrect */
}
```

Another problem is the risk of running out of stack. This will happen when one function calls another, which in turn calls a third, etc., and the sum of the stack usage of each function is larger than the size of the stack. The risk is higher if large data objects are stored on the stack, or when recursive functions are used.

---

## Dynamic memory on the heap

Memory for objects allocated on the heap will live until the objects are explicitly released. This type of memory storage is very useful for applications where the amount of data is not known until runtime.

In C, memory is allocated using the standard library function `malloc`, or one of the related functions `calloc` and `realloc`. The memory is released again using `free`.

In C++, a special keyword, `new`, allocates memory and runs constructors. Memory allocated with `new` must be released using the keyword `delete`.

See also *Setting up heap memory*, page 95.

### POTENTIAL PROBLEMS

Applications that are using heap-allocated objects must be designed very carefully, because it is easy to end up in a situation where it is not possible to allocate objects on the heap.

The heap can become exhausted if your application uses too much memory. It can also become full if memory that no longer is in use was not released.

For each allocated memory block, a few bytes of data for administrative purposes is required. For applications that allocate a large number of small blocks, this administrative overhead can be substantial.

There is also the matter of fragmentation; this means a heap where small sections of free memory is separated by memory used by allocated objects. It is not possible to allocate

a new object if no piece of free memory is large enough for the object, even though the sum of the sizes of the free memory exceeds the size of the object.

Unfortunately, fragmentation tends to increase as memory is allocated and released. For this reason, applications that are designed to run for a long time should try to avoid using memory allocated on the heap.

# Functions

- Function-related extensions
- ARM and Thumb code
- Execution in RAM
- Interrupt functions for Cortex-M devices
- Interrupt functions for ARM7/9/11, Cortex-A, and Cortex-R devices
- Inlining functions

---

## Function-related extensions

In addition to supporting Standard C, the compiler provides several extensions for writing functions in C. Using these, you can:

- Generate code for the different CPU modes ARM and Thumb Typically, this refers to target-specific keywords, such as `__arm`, `__thumb`. If there are no such things, remove bullet.
- Execute functions in RAM
- Write interrupt functions for the different devices
- Control function inlining
- Facilitate function optimization
- Access hardware features.

The compiler uses compiler options, extended keywords, pragma directives, and intrinsic functions to support this.

For more information about optimizations, see *Efficient coding for embedded applications*, page 201. For information about the available intrinsic functions for accessing hardware operations, see the chapter *Intrinsic functions*.

---

## ARM and Thumb code

The IAR C/C++ Compiler for ARM can generate code for either the 32-bit ARM, or the 16-bit Thumb or Thumb2 instruction set. Use the `--cpu_mode` option, alternatively the `--arm` or `--thumb` options, to specify which instruction set should be used for your

project. For individual functions, it is possible to override the project setting by using the extended keywords `__arm` and `__thumb`. You can freely mix ARM and thumb code in the same application, as long as the code is interworking.

When performing function calls, the compiler always attempts to generate the most efficient assembler language instruction or instruction sequence available. As a result, 4 Gbytes of continuous memory in the range `0x0-0xFFFFFFFF` can be used for placing code. There is a limit of 4 Mbytes per code module.

The size of all code pointers is 4 bytes. There are restrictions to implicit and explicit casts from code pointers to data pointers or integer types or vice versa. For further information about the restrictions, see *Pointer types*, page 313.

In the chapter *Assembler language interface*, the generated code is studied in more detail in the description of calling C functions from assembler language and vice versa.

---

## Execution in RAM

The `__ramfunc` keyword makes a function execute in RAM. In other words it places the function in a section that has read/write attributes. The function is copied from ROM to RAM at system startup just like any initialized variable, see *System startup and termination*, page 117.

The keyword is specified before the return type:

```
__ramfunc void foo(void);
```

If a function declared `__ramfunc` tries to access ROM, the compiler will issue a warning.

If the whole memory area used for code and constants is disabled—for example, when the whole flash memory is being erased—only functions and data stored in RAM may be used. Interrupts must be disabled unless the interrupt vector and the interrupt service routines are also stored in RAM.

String literals and other constants can be avoided by using initialized variables. For example, the following lines:

```
__ramfunc void test()
{
    /* myc: initializer in ROM */
    const int myc[] = { 10, 20 };

    /* string literal in ROM */
    msg("Hello");
}
```



can be rewritten to:

```
__ramfunc void test()
{
    /* myc: initialized by cstartup */
    static int myc[] = { 10, 20 };

    /* hello: initialized by cstartup */
    static char hello[] = "Hello";

    msg(hello);
}
```

For more information, see *Initializing code—copying ROM to RAM*, page 98.

---

## Interrupt functions for Cortex-M devices

Cortex-M has a different interrupt mechanism than previous ARM architectures, which means the primitives provided by the compiler are also different.

### INTERRUPTS FOR CORTEX-M

On Cortex-M, an interrupt service routine enters and returns in the same way as a normal function, which means no special keywords are required. Thus, the keywords `__irq`, `__fiq`, and `__nested` are not available when you compile for Cortex-M.

These exception function names are defined in `cstartup_M.c` and `cstartup_M.s`. They are referred to by the library exception vector code:

```
NMI_Handler
HardFault_Handler
MemManage_Handler
BusFault_Handler
UsageFault_Handler
SVC_Handler
DebugMon_Handler
PendSV_Handler
SysTick_Handler
```

The vector table is implemented as an array. It should always have the name `__vector_table`, because the C-SPY debugger looks for that symbol when determining where the vector table is located.

The predefined exception functions are defined as weak symbols. A weak symbol is only included by the linker as long as no duplicate symbol is found. If another symbol is defined with the same name, it will take precedence. Your application can therefore simply define its own exception function by just defining it using the correct name from

the list above. If you need other interrupts or other exception handlers, you must make a copy of the `cstartup_M.c` or `cstartup_M.s` file and make the proper addition to the vector table.

The intrinsic functions `__get_CPSR` and `__set_CPSR` are not available when you compile for Cortex-M. Instead, if you need to get or set values of these or other registers, you can use inline assembler. For more information, see *Passing values between C and assembler objects*, page 218.

---

## Interrupt functions for ARM7/9/11, Cortex-A, and Cortex-R devices

The IAR C/C++ Compiler for ARM provides the following primitives related to writing interrupt functions for ARM7/9/11, Cortex-A, and Cortex-R devices:

- The extended keywords: `__irq`, `__fiq`, `__swi`, `__nested`,
- The intrinsic functions: `__enable_interrupt`, `__disable_interrupt`, `__get_interrupt_state`, `__set_interrupt_state`.

**Note:** Cortex-M has a different interrupt mechanism than other ARM devices, and for these devices a different set of primitives is available. For more information, see *Interrupt functions for Cortex-M devices*, page 65.

### INTERRUPT FUNCTIONS

In embedded systems, using interrupts is a method for handling external events immediately; for example, detecting that a button was pressed.

#### Interrupt service routines

In general, when an interrupt occurs in the code, the core immediately stops executing the code it runs, and starts executing an interrupt routine instead. It is important that the environment of the interrupted function is restored after the interrupt is handled (this includes the values of processor registers and the processor status register). This makes it possible to continue the execution of the original code after the code that handled the interrupt was executed.

The compiler supports interrupts, software interrupts, and fast interrupts. For each interrupt type, an interrupt routine can be written.

All interrupt functions must be compiled in ARM mode; if you are using Thumb mode, use the `__arm` extended keyword or the `#pragma type_attribute=__arm` directive to override the default behavior. This is not applicable for Cortex-M devices.

## Interrupt vectors and the interrupt vector table

Each interrupt routine is associated with a vector address/instruction in the exception vector table, which is specified in the ARM cores documentation. The interrupt vector is the address in the exception vector table. For the ARM cores, the exception vector table starts at address `0x0`.

By default, the vector table is populated with a *default interrupt handler* which loops indefinitely. For each interrupt source that has no explicit interrupt service routine, the default interrupt handler will be called. If you write your own service routine for a specific vector, that routine will override the default interrupt handler.

## Defining an interrupt function—an example

To define an interrupt function, the `__irq` or the `__fiq` keyword can be used. For example:

```
__irq __arm void IRQ_Handler(void)
{
    /* Do something */
}
```

See the ARM cores documentation for more information about the interrupt vector table.

**Note:** An interrupt function must have the return type `void`, and it cannot specify any parameters.

## Interrupt and C++ member functions

Only `static` member functions can be interrupt functions. When a non-static member function is called, it must be applied to an object. When an interrupt occurs and the interrupt function is called, there is no object available to apply the member function to.

## INSTALLING EXCEPTION FUNCTIONS

All interrupt functions and software interrupt handlers must be installed in the vector table. This is done in assembler language in the system startup file `cstartup.s`.

The default implementation of the ARM exception vector table in the standard runtime library jumps to predefined functions that implement an infinite loop. Any exception that occurs for an event not handled by your application will therefore be caught in the infinite loop (B. ).

The predefined functions are defined as weak symbols. A weak symbol is only included by the linker as long as no duplicate symbol is found. If another symbol is defined with the same name, it will take precedence. Your application can therefore simply define its own exception function by just defining it using the correct name.

These exception function names are defined in `cstartup.s` and referred to by the library exception vector code:

```
Undefined_Handler
SWI_Handler
Prefetch_Handler
Abort_Handler
IRQ_Handler
FIQ_Handler
```

To implement your own exception handler, define a function using the appropriate exception function name from the list above.

For example to add an interrupt function in C, it is sufficient to define an interrupt function named `IRQ_Handler`:

```
__irq __arm void IRQ_Handler()
{
}
```

An interrupt function must have C linkage, read more in *Calling convention*, page 153.

If you use C++, an interrupt function could look, for example, like this:

```
extern "C"
{
    __irq __arm void IRQ_Handler(void);
}
__irq __arm void IRQ_Handler(void)
{
}
```

No other changes are needed.

## INTERRUPTS AND FAST INTERRUPTS

The interrupt and fast interrupt functions are easy to handle as they do not accept parameters or have a return value. Use any of these keywords:

- To declare an interrupt function, use the `__irq` extended keyword or the `#pragma type_attribute=__irq` directive. For syntax information, see `__irq`, page 325 and `type_attribute`, page 353, respectively.
- To declare a fast interrupt function, use the `__fiq` extended keyword or the `#pragma type_attribute=__fiq` directive. For syntax information, see `__fiq`, page 324, and `type_attribute`, page 353, respectively.

**Note:** An interrupt function (`irq`) and a fast interrupt function (`fiq`) must have a return type of `void` and cannot have any parameters. A software interrupt function (`swi`) may

have parameters and return values. By default, only four registers, R0–R3, can be used for parameters and only the registers R0–R1 can be used for return values.

## NESTED INTERRUPTS

Interrupts are automatically disabled by the ARM core prior to entering an interrupt handler. If an interrupt handler re-enables interrupts, calls functions, and another interrupt occurs, then the return address of the interrupted function—stored in LR—is overwritten when the second IRQ is taken. In addition, the contents of SPSR will be destroyed when the second interrupt occurs. The `__irq` keyword itself does not save and restore LR and SPSR. To make an interrupt handler perform the necessary steps needed when handling nested interrupts, the keyword `__nested` must be used in addition to `__irq`. The function prolog—function entrance sequence—that the compiler generates for nested interrupt handlers will switch from IRQ mode to system mode. Make sure that both the IRQ stack and system stack is set up. If you use the default `cstartup.s` file, both stacks are correctly set up.

Compiler-generated interrupt handlers that allow nested interrupts are supported for IRQ interrupts only. The FIQ interrupts are designed to be serviced quickly, which in most cases mean that the overhead of nested interrupts would be too high.

This example shows how to use nested interrupts with the ARM vectored interrupt controller (VIC):

```
__irq __nested __arm void interrupt_handler(void)
{
    void (*interrupt_task)();
    unsigned int vector;

    /* Get interrupt vector. */
    vector = VICVectAddr;

    interrupt_task = (void(*)()) vector;

    /* Allow other IRQ interrupts to be serviced. */
    __enable_interrupt();

    /* Execute the task associated with this interrupt. */

    (*interrupt_task)();
}
```

**Note:** The `__nested` keyword requires the processor mode to be in either User or System mode.

## SOFTWARE INTERRUPTS

Software interrupt functions are slightly more complex than other interrupt functions, in the way that they need a software interrupt handler (a dispatcher), are invoked (called) from running application software, and that they accept arguments and have return values. The mechanisms for calling a software interrupt function and how the software interrupt handler dispatches the call to the actual software interrupt function is described here.

### Calling a software interrupt function

To call a software interrupt function from your application source code, the assembler instruction `SVC #immed` is used, where `immed` is an integer value that is referred to as the software interrupt number—or `swi_number`—in this guide. The compiler provides an easy way to implicitly generate this instruction from C/C++ source code, by using the `__swi` keyword and the `#pragma swi_number` directive when declaring the function.

A `__swi` function can for example be declared like this:

```
#pragma swi_number=0x23
__swi int swi_function(int a, int b);
```

In this case, the assembler instruction `SVC 0x23` will be generated where the function is called.

Software interrupt functions follow the same calling convention regarding parameters and return values as an ordinary function, except for the stack usage, see *Calling convention*, page 153.

For more information, see `__swi`, page 329, and `swi_number`, page 352, respectively.

### The software interrupt handler and functions

The interrupt handler, for example `SWI_Handler` works as a dispatcher for software interrupt functions. It is invoked from the interrupt vector and is responsible for retrieving the software interrupt number and then calling the proper software interrupt function. The `SWI_Handler` must be written in assembler as there is no way to retrieve the software interrupt number from C/C++ source code.

### The software interrupt functions

The software interrupt functions can be written in C or C++. Use the `__swi` keyword in a function definition to make the compiler generate a return sequence suited for a specific software interrupt function. The `#pragma swi_number` directive is not needed in the interrupt function definition.

For more information, see `__swi`, page 329.

## Setting up the software interrupt stack pointer

If software interrupts will be used in your application, then the software interrupt stack pointer (`SVC_STACK`) must be set up and some space must be allocated for the stack. The `SVC_STACK` pointer can be set up together with the other stacks in the `cstartup.s` file. As an example, see the set up of the interrupt stack pointer. Relevant space for the `SVC_STACK` pointer is set up in the linker configuration file, see *Setting up stack memory*, page 95.

## INTERRUPT OPERATIONS

An interrupt function is called when an external event occurs. Normally it is called immediately while another function is executing. When the interrupt function has finished executing, it returns to the original function. It is imperative that the environment of the interrupted function is restored; this includes the value of processor registers and the processor status register.

When an interrupt occurs, the following actions are performed:

- The operating mode is changed corresponding to the particular exception
- The address of the instruction following the exception entry instruction is saved in `R14` of the new mode
- The old value of the `CPSR` is saved in the `SPSR` of the new mode
- Interrupt requests are disabled by setting bit 7 of the `CPSR` and, if the exception is a fast interrupt, further fast interrupts are disabled by setting bit 6 of the `CPSR`
- The `PC` is forced to begin executing at the relevant vector address.

For example, if an interrupt for vector `0x18` occurs, the processor will start to execute code at address `0x18`. The memory area that is used as start location for interrupts is called the interrupt vector table. The content of the interrupt vector is normally a branch instruction jumping to the interrupt routine.

**Note:** If the interrupt function enables interrupts, the special processor registers needed to return from the interrupt routine must be assumed to be destroyed. For this reason they must be stored by the interrupt routine to be restored before it returns. This is handled automatically if the `__nested` keyword is used.

---

## Inlining functions

Function inlining means that a function, whose definition is known at compile time, is integrated into the body of its caller to eliminate the overhead of the function call. This optimization, which is performed at optimization level High, normally reduces execution time, but might increase the code size. The resulting code might become more

difficult to debug. Whether the inlining actually occurs is subject to the compiler's heuristics.

The compiler heuristically decides which functions to inline. Different heuristics are used when optimizing for speed, size, or when balancing between size and speed. Normally, code size does not increase when optimizing for size.

## C VERSUS C++ SEMANTICS

In C++, all definitions of a specific inline function in separate translation units must be exactly the same. If the function is not inlined in one or more of the translation units, then one of the definitions from these translation units will be used as the function implementation.

In C, you must manually select one translation unit that includes the non-inlined version of an inline function. You do this by explicitly declaring the function as `extern` in that translation unit. If you declare the function as `extern` in more than one translation unit, the linker will issue a *multiple definition* error. In addition, in C, inline functions cannot refer to static variables or functions.

For example:

```
// In a header file.
static int sX;
inline void F(void)
{
    //static int sY; // Cannot refer to statics.
    //sX;           // Cannot refer to statics.
}

// In one source file.
// Declare this F as the non-inlined version to use.
extern inline void F();
```

## FEATURES CONTROLLING FUNCTION INLINING

There are several mechanisms for controlling function inlining:

- The `inline` keyword advises the compiler that the function defined immediately after the directive should be inlined.

If you compile your function in C or C++ mode, the keyword will be interpreted according to its definition in Standard C or Standard C++, respectively.

The main difference in semantics is that in Standard C you cannot (in general) simply supply an inline definition in a header file. You must supply an external definition in one of the compilation units, by designating the inline definition as being external in that compilation unit.



- `#pragma inline` is similar to the `inline` keyword, but with the difference that the compiler always uses C++ inline semantics.

By using the `#pragma inline` directive you can also disable the compiler's heuristics to either force inlining or completely disable inlining. For more information, see *inline*, page 342.

- `--use_cplusplus_inline` forces the compiler to use C++ semantics when compiling a Standard C source code file.
- `--no_inline`, `#pragma optimize=no_inline`, and `#pragma inline=never` all disable function inlining. By default, function inlining is enabled at optimization level High.

The compiler can only inline a function if the definition is known. Normally, this is restricted to the current translation unit. However, when the `--mfc` compiler option for multi-file compilation is used, the compiler can inline definitions from all translation units in the multi-file compilation unit. For more information, see *Multi-file compilation units*, page 209.

For more information about the function inlining optimization, see *Function inlining*, page 212.



# Linking using ILINK

- Linking—an overview
- Modules and sections
- The linking process in detail
- Placing code and data—the linker configuration file
- Initialization at system startup
- Stack usage analysis

---

## Linking—an overview

The IAR ILINK Linker is a powerful, flexible software tool for use in the development of embedded applications. It is equally well suited for linking small, single-file, absolute assembler programs as it is for linking large, relocatable, multi-module, C/C++, or mixed C/C++ and assembler programs.

The linker combines one or more relocatable object files—produced by the IAR Systems compiler or assembler—with selected parts of one or more object libraries to produce an executable image in the industry-standard format *Executable and Linking Format* (ELF).

The linker will automatically load only those library modules—user libraries and Standard C or C++ library variants—that are actually needed by the application you are linking. Further, the linker eliminates duplicate sections and sections that are not required.

ILINK can link both ARM and Thumb code, as well as a combination of them. By automatically inserting additional instructions (veneers), ILINK will assure that the destination will be reached for any calls and branches, and that the processor state is switched when required. For more details about how to generate veneers, see *Veneers*, page 100.

The linker uses a *configuration file* where you can specify separate locations for code and data areas of your target system memory map. This file also supports automatic handling of the application's initialization phase, which means initializing global variable areas and code areas by copying initializers and possibly decompressing them as well.

The final output produced by ILINK is an absolute object file containing the executable image in the ELF (including DWARF for debug information) format. The file can be downloaded to C-SPY or any other compatible debugger that supports ELF/DWARF, or it can be stored in EPROM or flash.

To handle ELF files, various tools are included. For information about included utilities, see *Specific ELF tools*, page 40.

---

## Modules and sections

Each relocatable object file contains one module, which consists of:

- Several sections of code or data
- Runtime attributes specifying various types of information, for example the version of the runtime environment
- Optionally, debug information in DWARF format
- A symbol table of all global symbols and all external symbols used.

A *section* is a logical entity containing a piece of data or code that should be placed at a physical location in memory. A section can consist of several *section fragments*, typically one for each variable or function (symbols). A section can be placed either in RAM or in ROM. In a normal embedded application, sections that are placed in RAM do not have any content, they only occupy space.

Each section has a name and a type attribute that determines the content. The type attribute is used (together with the name) for selecting sections for the ILINK configuration. The most commonly used attributes are:

code	Executable code
readonly	Constant variables
readwrite	Initialized variables
zeroinit	Zero-initialized variables

**Note:** In addition to these section types—sections that contain the code and data that are part of your application—a final object file will contain many other types of sections, for example sections that contain debugging information or other type of meta information.

A section is the smallest linkable unit; but if possible, ILINK can exclude smaller units—section fragments—from the final application. For more information, see *Keeping modules*, page 94, and *Keeping symbols and sections*, page 94.

At compile time, data and functions are placed in different sections. At link time, one of the most important functions of the linker is to assign addresses to the various sections used by the application.

The IAR build tools have many predefined section names. See the chapter *Section reference* for more information about each section.

You can group sections together for placement by using blocks. See *Define block directive*, page 415.

---

## The linking process in detail

The relocatable modules in object files and libraries, produced by the IAR compiler and assembler, cannot be executed as is. To become an executable application, they must be *linked*.


**Note:** Modules produced by a toolset from another vendor can be included in the build as well, as long as the module is AEABI (ARM Embedded Application Binary Interface) compliant. Be aware that this also might require a compiler utility library from the same vendor.

The linker is used for the link process. It normally performs the following procedure (note that some of the steps can be turned off by command line options or by directives in the linker configuration file):

- Determine which modules to include in the application. Modules provided in object files are always included. A module in a library file is only included if it provides a definition for a global symbol that is referenced from an included module.
- Select which standard library files to use. The selection is based on attributes of the included modules. These libraries are then used for satisfying any still outstanding undefined symbols.
- Determine which sections/section fragments from the included modules to include in the application. Only those sections/section fragments that are actually needed by the application are included. There are several ways to determine of which sections/section fragments that are needed, for example, the `__root` object attribute, the `#pragma required` directive, and the `keep` linker directive. In case of duplicate sections, only one is included.
- Where appropriate, arrange for the initialization of initialized variables and code in RAM. The `initialize` directive causes the linker to create extra sections to enable copying from ROM to RAM. Each section that will be initialized by copying is divided into two sections, one for the ROM part and one for the RAM part. If manual initialization is not used, the linker also arranges for the startup code to perform the initialization.

- Determine where to place each section according to the section placement directives in the *linker configuration file*. Sections that are to be initialized by copying appear twice in the matching against placement directives, once for the ROM part and once for the RAM part, with different attributes. During the placement, the linker also adds any required veneers to make a code reference reach its destination or to switch CPU modes.
- Produce an absolute file that contains the executable image and any debug information provided. The contents of each needed section in the relocatable input files is calculated using the relocation information supplied in its file and the addresses determined when placing sections. This process can result in one or more relocation failures if some of the requirements for a particular section are not met, for instance if placement resulted in the destination address for a PC-relative jump instruction being out of range for that instruction.
- Optionally, produce a map file that lists the result of the section placement, the address of each global symbol, and finally, a summary of memory usage for each module and library.

This illustration shows the linking process:

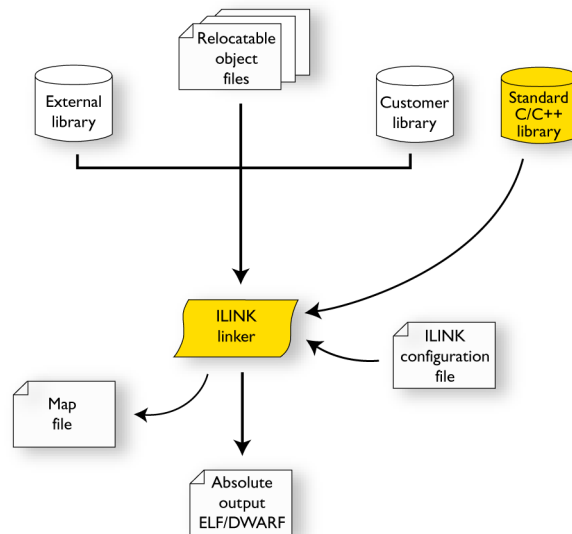

During the linking, ILINK might produce error messages and logging messages on `stdout` and `stderr`. The log messages are useful for understanding why an application was linked as it was. For example, why a module or section (or section fragment) was included.

**Note:** To see the actual content of an ELF object file, use `ielfdumparm`. See *The IAR ELF Dumper—ielfdump*, page 452.

---

## Placing code and data—the linker configuration file

The placement of sections in memory is performed by the IAR ILINK Linker. It uses the *linker configuration file* where you can define how ILINK should treat each section and how they should be placed into the available memories.

A typical linker configuration file contains definitions of:

- Available addressable memories
- Populated regions of those memories
- How to treat input sections
- Created sections
- How to place sections into the available regions.

The file consists of a sequence of declarative directives. This means that the linking process will be governed by all directives at the same time.

To use the same source code with different derivatives, just rebuild the code with the appropriate configuration file.

### A SIMPLE EXAMPLE OF A CONFIGURATION FILE

Assume a simple 32-bit architecture that has these memory prerequisites:

- There are 4 Gbytes of addressable memory.
- There is ROM memory in the address range 0x0000–0x10000.
- There is RAM memory in the range 0x20000–0x30000.
- The stack has an alignment of 8.
- The system startup code must be located at a fixed address.

A simple configuration file for this assumed architecture can look like this:

```
/* The memory space denoting the maximum possible amount
   of addressable memory */
define memory Mem with size = 4G;

/* Memory regions in an address space */
define region ROM = Mem:[from 0x00000 size 0x10000];
define region RAM = Mem:[from 0x20000 size 0x10000];
```

```

/* Create a stack */
define block STACK with size = 0x1000, alignment = 8 { };

/* Handle initialization */
do not initialize { section .noinit };
initialize by copy { readwrite }; /* Initialize RW sections,
                                   exclude zero-initialized
                                   sections */

/* Place startup code at a fixed address */
place at start of ROM { readonly section .cstartup };

/* Place code and data */
place in ROM { readonly }; /* Place constants and initializers in
                             ROM: .rodata and .data_init */
place in RAM { readwrite, /* Place .data, .bss, and .noinit */
              block STACK }; /* and STACK */

```

This configuration file defines one addressable memory `Mem` with the maximum of 4 Gbytes of memory. Further, it defines a ROM region and a RAM region in `Mem`, namely `ROM` and `RAM`. Each region has the size of 64 Kbytes.

The file then creates an empty block called `STACK` with a size of 4 Kbytes in which the application stack will reside. To create a *block* is the basic method which you can use to get detailed control of placement, size, etc. It can be used for grouping sections, but also as in this example, to specify the size and placement of an area of memory.


Next, the file defines how to handle the initialization of variables, read/write type (`readwrite`) sections. In this example, the initializers are placed in ROM and copied at startup of the application to the RAM area. By default, ILINK may compress the initializers if this appears to be advantageous.

The last part of the configuration file handles the actual placement of all the sections into the available regions. First, the startup code—defined to reside in the read-only (`readonly`) section `.cstartup`—is placed at the start of the ROM region, that is at address `0x10000`. Note that the part within `{ }` is referred to as *section selection* and it selects the sections for which the directive should be applied to. Then the rest of the read-only sections are placed in the ROM region. Note that the section selection `{ readonly section .cstartup }` takes precedence over the more generic section selection `{ readonly }`.

Finally, the read/write (`readwrite`) sections and the `STACK` block are placed in the RAM region.



This illustration gives a schematic overview of how the application is placed in memory:

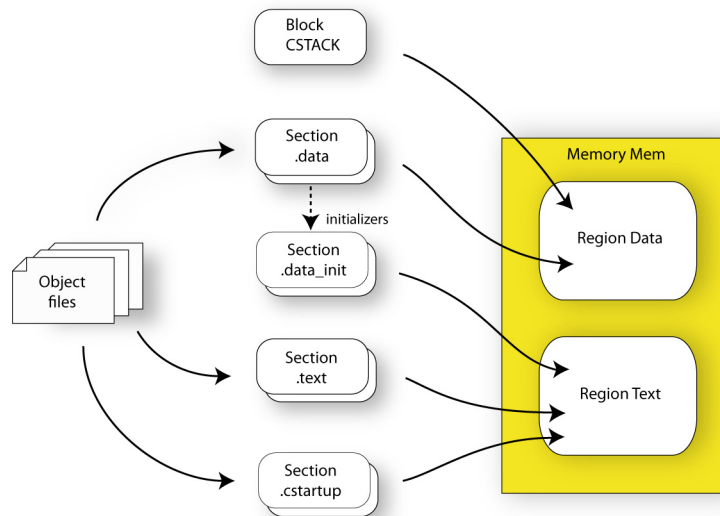

In addition to these standard directives, a configuration file can contain directives that define how to:

- Map a memory that can be addressed in multiple ways
- Handle conditional directives
- Create symbols with values that can be used in the application
- More in detail, select the sections a directive should be applied to
- More in detail, initialize code and data.

For more details and examples about customizing the linker configuration file, see the chapter *Linking your application*.

For more information about the linker configuration file, see the chapter *The linker configuration file*.

## Initialization at system startup

In Standard C, all static variables—variables that are allocated at a fixed memory address—must be initialized by the runtime system to a known value at application startup. This value is either an explicit value assigned to the variable, or if no value is

given, it is cleared to zero. In the compiler, there are exceptions to this rule, for example variables declared `__no_init`, which are not initialized at all.

The compiler generates a specific type of section for each type of variable initialization:

Categories of declared data	Source	Section type	Section name	Section content
Zero-initialized data	<code>int i;</code>	Read/write data, zero-init	<code>.bss</code>	None
Zero-initialized data	<code>int i = 0;</code>	Read/write data, zero-init	<code>.bss</code>	None
Initialized data (non-zero)	<code>int i = 6;</code>	Read/write data	<code>.data</code>	The initializer
Non-initialized data	<code>__no_init int i;</code>	Read/write data, zero-init	<code>.noinit</code>	None
Constants	<code>const int i = 6;</code>	Read-only data	<code>.rodata</code>	The constant
Code	<code>__ramfunc void myfunc() {}</code>	Read/write code	<code>.textrw</code>	The code

Table 3: Sections holding initialized data

**Note:** Clustering of static variables might group zero-initialized variables together with initialized data in `.data`. The compiler can decide to place constants in the `.text` section to avoid loading the address of a constant from a constant table.

For information about all supported sections, see the chapter *Section reference*.

## THE INITIALIZATION PROCESS

Initialization of data is handled by ILINK and the system startup code in conjunction.

To configure the initialization of variables, you must consider these issues:

- Sections that should be zero-initialized are handled automatically by ILINK; they should only be placed in RAM
- Sections that should be initialized, except for zero-initialized sections, should be listed in an `initialize` directive

Normally during linking, a section that should be initialized is split into two sections, where the original initialized section will keep the name. The contents are placed in the new initializer section, which will get the original name suffixed with `_init`. The initializers should be placed in ROM and the initialized sections in RAM, by means of placement directives. The most common example is the `.data` section which the linker splits into `.data` and `.data_init`.

- Sections that contains constants should not be initialized; they should only be placed in flash/ROM
- Sections holding `__no_init` declared variables should not be initialized and thus should be listed in a `do not initialize` directive. They should also be placed in RAM.

In the linker configuration file, it can look like this:

```
/* Handle initialization */
do not initialize { section .noinit };
initialize by copy { readwrite }; /* Initialize RW sections,
                                   exclude zero-initialized
                                   sections */

/* Place startup code at a fixed address */
place at start of ROM { readonly section .cstartup };

/* Place code and data */
place in ROM { readonly }; /* Place constants and initializers in
                             ROM: .rodata and .data_init */
place in RAM { readwrite, /* Place .data, .bss, and .noinit */
              block STACK }; /* and STACK */
```

**Note:** When compressed initializers are used (see *Initialize directive*, page 418), the contents sections (that is, sections with the `_init` suffix) are not listed as separate sections in the map file. Instead, they are combined into aggregates of “initializer bytes”. You can place the contents sections the usual way in the linker configuration file; however, this affects the placement (and possibly the number) of the “initializer bytes” aggregates.

For more information about and examples of how to configure the initialization, see *Linking considerations*, page 91.

## C++ DYNAMIC INITIALIZATION

The compiler places subroutine pointers for performing C++ dynamic initialization into sections of the ELF section types `SHT_PREINIT_ARRAY` and `SHT_INIT_ARRAY`. By default, the linker will place these into a linker-created block, ensuring that all sections of the section type `SHT_PREINIT_ARRAY` are placed before those of the type `SHT_INIT_ARRAY`. If any such sections were included, code to call the routines will also be included.

The linker-created blocks are only generated if the linker configuration does not contain section selector patterns for the `preinit_array` and `init_array` section types. The

effect of the linker-created blocks will be very similar to what happens if the linker configuration file contains this:

```
define block SHT$$PREINIT_ARRAY { preinit_array };
define block SHT$$INIT_ARRAY { init_array };
define block CPP_INIT with fixed order { block
    SHT$$PREINIT_ARRAY,
    block SHT$$INIT_ARRAY };
```

If you put this into your linker configuration file, you must also mention the `CPP_INIT` block in one of the section placement directives. If you wish to select where the linker-created block is placed, you can use a section selector with the name `".init_array"`.

See also *Section-selectors*, page 423.

---

## Stack usage analysis

Under the right circumstances, the linker can accurately calculate the maximum stack usage for each call graph root (each function that is not called from another function).

If you enable stack usage analysis (see `--enable_stack_usage`, page 285), a stack usage chapter will be added to the linker map file, listing for each call graph root the particular call chain which results in the maximum stack depth.

This is only accurate if there is accurate stack usage information for each function in the application.

In general, the compiler will generate this information for each C function, but if there are indirect calls (calls using function pointers) in your application, you must supply a list of possible functions that can be called from each calling function. You can do this by using pragma directives in the source file, or by using a separate stack usage control file when linking.

If you use a stack usage control file (see `--stack_usage_control`, page 300), you can also supply stack usage information for functions in modules that do not have stack usage information.

You can use the `check_that` directive (see *Check that directive*, page 427) in your linker configuration file to check that the stack usage calculated by the linker does not exceed the stack space you have allocated.

## LIMITATIONS

Apart from missing or incorrect stack usage information, there are also other sources of inaccuracy in the analysis:

- The linker might not always be able to identify all functions in object modules that lack stack usage information. In particular this might be a problem with object modules written in assembler or produced by non-IAR tools.
- If you use inline assembler to change the frame size or to perform function calls, this will not be reflected in the analysis.
- Extra space consumed by other sources (the processor, an operating system, etc) is not accounted for.
- C++ source code that uses exceptions is not supported.
- If you use other forms of function calls, like software interrupts, they will not be reflected in the call graph.
- Using multi-file compilation (`--mfc`) can interfere with using a stack usage control file to specify properties of module-local functions in the involved files.

Note that stack usage analysis produces a worst case result. The program might not actually ever end up in the maximum call chain, by design, or by coincidence. In particular, the set of possible destinations for a virtual function call in C++ might sometimes include implementations of the function in question which cannot, in fact be called from that point in the code.



Stack usage analysis is only a complement to actual measurement. If the result is important, you need to perform independent validation of the results of the analysis.

## STACK USAGE CONTROL FILES

A stack usage control file contains stack usage control directives.

Using stack usage control files, you can:

- Specify complete stack usage information (call graph root category, stack usage, and possible calls) for a function, by using the stack usage control directive `function`.
- Exclude certain functions from stack usage analysis, by using the stack usage control directive `exclude`.
- Specify the possible destinations for indirect calls in a function, by using the stack usage control directive `possible calls`.
- Specify that functions are call graph roots, including an optional call graph root category, by using the stack usage control directive `call graph root`.
- Specify a maximum recursion depth for a recursion nest (a set of cycles in the call graph with at least one common node).

- Selectively suppress the warning about unmentioned functions referenced by a module for which you have supplied stack usage information in the stack usage control file.

If your interrupt functions have not already been designated as call graph roots by the compiler, you must do so manually. You can do this either by using the `#pragma call_graph_root` directive in your source code or by using a simple stack usage control file, which might look something like this:

```
call graph root [interrupt]: Irq1Handler, Irq2Handler;
```

For more information, see *call\_graph\_root*, page 337 and the chapter *Stack usage control files*, page 85.

## SOURCE ANNOTATION

As an alternative to specifying possible calls in a stack usage control file, you can instead annotate the source code.

In C files, at the point of an indirect call, you can use the `#pragma calls` directive to list the possible destinations for that call.

You can also, at the definition of a function, specify that it is a call graph root by using the `#pragma call_graph_root` directive.

## SITUATIONS WHERE WARNINGS ARE ISSUED

When stack usage analysis is enabled in the linker, warnings will be generated in the following circumstances:

- There is at least one function without stack usage information.
- There is at least one indirect call site in the application for which a list of possible called functions has not been supplied.
- There are no known indirect calls, but there is at least one uncalled function that is not known to be a call graph root.
- The application contains recursion (a cycle in the call graph) for which no maximum recursion depth has been supplied, or which is of a form for which the linker is unable to calculate a reliable estimate of stack usage.
- There are calls to a function declared as a call graph root.
- You have used the stack usage control file to supply stack usage information for functions in a module that does not have such information, and there are functions referenced by that module which have not been mentioned as being called in the stack usage control file.

## MAP FILE CONTENTS

When stack usage analysis is enabled, the linker map file contains a stack usage chapter with a summary of the stack usage for each call graph root category, and lists the call chain that results in the maximum stack depth for each call graph root. This is an example of what the stack usage chapter in the map file might look like:

```
*****
*** STACK USAGE
***

Call Graph Root Category  Max Use  Total Use
-----
interrupt                 104      136
Program entry             168      168

Program entry
  "__iar_program_start": 0x000085ac
  Maximum call chain                                168 bytes

    "__iar_program_start"                          0
    "__cmain"                                       0
    "main"                                           8
    "printf"                                        24
    "_PrintfTiny"                                   56
    "_Prout"                                        16
    "putchar"                                       16
    "__write"                                       0
    "__dwrite"                                      0
    "__iar_sh_stdout"                              24
    "__iar_get_ttio"                               24
    "__iar_lookup_ttioh"                           0

interrupt
  "FaultHandler": 0x00008434

  Maximum call chain                                32 bytes

    "FaultHandler"                                  32

interrupt
  "IRQHandler": 0x00008424

  Maximum call chain                                104 bytes

    "IRQHandler"                                    24
    "do_something" in suexample.o [1]              80
```

The summary contains the depth of the deepest call chain in each category as well as the sum of the depths of the deepest call chains in that category.

In this case, the maximum stack depth for the program entry (`__iar_program_start`) is 168 bytes, and occurs inside the system library `printf` function. Public functions are listed by name, while module-local functions also include the name of the module (like `do_something` above).

## CHECKING THAT THE STACK IS LARGE ENOUGH

You can use the `check that` directive in your linker configuration file to check that the stack is large enough.

For example:

```
check that size(block CSTACK) >= maxstack("Program entry")
      + totalstack("interrupt") + 100;
```

When linking, the linker emits an error if the expression is false (zero). In this example there would be an error if the sum of 168 (the maximum stack usage of the program entry), 136 (the sum of the maximum stack usages in category "interrupt"), and 100 (a safety margin) is greater than the size of the `CSTACK` block.

## CALL GRAPH LOG

To help you interpret the results of the stack usage analysis, there is a log output option that produces a simple text representation of the call graph (`--log call_graph`).



**Example output:**

```

Program entry:
0 __iar_program_start [168]
0 __cmain [168]
0 __iar_data_init3 [16]
  8 __iar_zero_init3 [8]
    16 - [0]
  8 __iar_copy_init3 [8]
    16 - [0]
0 __low_level_init [0]
0 main [168]
  8 printf [160]
    32 _PrintfTiny [136]
      88 _Prout [80]
        104 putchar [64]
          120 __write [48]
            120 __dwrite [48]
              120 __iar_sh_stdout [48]
                144 __iar_get_ttio [24]
                  168 __iar_lookup_ttioh [0]
                    120 __iar_sh_write [24]
                      144 - [0]
            88 __aeabi_uidiv [0]
              88 __aeabi_idiv0 [0]
                88 strlen [0]
          0 exit [8]
            0 __exit [8]
              0 __iar_close_ttio [8]
                8 __iar_lookup_ttioh [0] ***
        0 __exit [8] ***

```

Each line consists of this information:

- The stack usage at the point of call of the function
- The name of the function, or a single '-' to indicate usage in a function at a point with no function call (typically in a leaf function)
- The stack usage along the deepest call chain from that point. If no such value could be calculated, "[---]" is output instead. "\*\*\*" marks functions that have already been shown.

**CALL GRAPH XML OUTPUT**

The linker can also produce a call graph file in XML format. This file contains one node for each function in your application, with the stack usage and call information relevant

to that function. It is intended to be input for post-processing tools and is not particularly human-readable.

For more information about the XML format used, see the `callGraph.txt` file in your product installation.

# Linking your application

- Linking considerations
- Hints for troubleshooting

---

## Linking considerations

Before you can link your application, you must set up the configuration required by ILINK.

### CHOOSING A LINKER CONFIGURATION FILE

The `config` directory contains two ready-made templates for the linker configuration files:

- `generic.icf`, designed for all cores except for Cortex-M cores
- `generic_cortex.icf`, designed for all Cortex-M cores.

The files contain the information required by ILINK. The only change, if any, you will normally have to make to the supplied configuration file is to customize the start and end addresses of each region so they fit the target system memory map. If, for example, your application uses additional external RAM, you must also add details about the external RAM memory area.

For some devices, device-specific configuration files are automatically selected.

To edit a linker configuration file, use the editor in the IDE, or any other suitable editor. Alternatively, choose **Project>Options>Linker** and click the **Edit** button on the **Config** page to open the dedicated linker configuration file editor.

Do not change the original template file. We recommend that you make a copy in the working directory, and modify the copy instead. If you are using the linker configuration file editor in the IDE, the IDE will make a copy for you.

Each project in the IDE should have a reference to one, and only one, linker configuration file. This file can be edited, but for the majority of all projects it is sufficient to configure the vital parameters in **Project>Options>Linker>Config**.

### DEFINING YOUR OWN MEMORY AREAS

The default configuration file that you selected has predefined ROM and RAM regions. This example will be used as a starting-point for all further examples in this chapter:

```

/* Define the addressable memory */
define memory Mem with size = 4G;

/* Define a region named ROM with start address 0 and to be 64
Kbytes large */
define region ROM = Mem:[from 0 size 0x10000];

/* Define a region named RAM with start address 0x20000 and to be
64 Kbytes large */
define region RAM = Mem:[from 0x20000 size 0x10000];

```

Each region definition must be tailored for the actual hardware.

To find out how much of each memory that was filled with code and data after linking, inspect the memory summary in the map file (command line option `--map`).

### Adding an additional region

To add an additional region, use the `define region` directive, for example:

```

/* Define a 2nd ROM region to start at address 0x80000 and to be
128 Kbytes large */
define region ROM2 = Mem:[from 0x80000 size 0x20000];

```

### Merging different areas into one region

If the region is comprised of several areas, use a region expression to merge the different areas into one region, for example:

```

/* Define the 2nd ROM region to have two areas. The first with
the start address 0x80000 and 128 Kbytes large, and the 2nd with
the start address 0xC0000 and 32 Kbytes large */
define region ROM2 = Mem:[from 0x80000 size 0x20000]
| Mem:[from 0xC0000 size 0x08000];

```

or equivalently

```

define region ROM2 = Mem:[from 0x80000 to 0xC7FFF]
-Mem:[from 0xA0000 to 0xBFFFF];

```

## PLACING SECTIONS

The default configuration file that you selected places all predefined sections in memory, but there are situations when you might want to modify this. For example, if you want to place the section that holds constant symbols in the `CONSTANT` region instead of in the default place. In this case, use the `place in` directive, for example:

```
/* Place sections with readonly content in the ROM region */
place in ROM {readonly};
```

```
/* Place the constant symbols in the CONSTANT region */
place in CONSTANT {readonly section .rodata};
```

**Note:** Placing a section—used by the IAR build tools—in a different memory which use a different way of referring to its content, will fail.

For the result of each placement directive after linking, inspect the placement summary in the map file (the command line option `--map`).

### Placing a section at a specific address in memory

To place a section at a specific address in memory, use the `place at` directive, for example:

```
/* Place section .vectors at address 0 */
place at address Mem:0x0 {readonly section .vectors};
```

### Placing a section first or last in a region

To place a section first or last in a region is similar, for example:

```
/* Place section .vectors at start of ROM */
place at start of ROM {readonly section .vectors};
```

### Declare and place your own sections

To declare new sections—in addition to the ones used by the IAR build tools—to hold specific parts of your code or data, use mechanisms in the compiler and assembler. For example:

```
/* Place a variable in that section. */
const short MyVariable @ "MYOWNSECTION" = 0xF0F0;
```

This is the corresponding example in assembler language:

```
name      createSection
section MYOWNSECTION:CONST ; Create a section,
                           ; and fill it with
dc16     0xF0F0             ; constant bytes.
end
```

To place your new section, the original `place in ROM {readonly};` directive is sufficient.

However, to place the section `MyOwnSection` explicitly, update the linker configuration file with a `place in` directive, for example:

```
/* Place MyOwnSection in the ROM region */
place in ROM {readonly section MyOwnSection};
```

## RESERVING SPACE IN RAM

Often, an application must have an empty uninitialized memory area to be used for temporary storage, for example a heap or a stack. It is easiest to achieve this at link time. You must create a block with a specified size and then place it in a memory.

In the linker configuration file, it can look like this:

```
define block TempStorage with size = 0x1000, alignment = 4 { };
place in RAM { block TempStorage };
```

To retrieve the start of the allocated memory from the application, the source code could look like this:

```
/* Define a section for temporary storage. */
#pragma section = "TempStorage"
char *GetTempStorageStartAddress()
{
    /* Return start address of section TempStorage. */
    return __section_begin("TempStorage");
}
```

## KEEPING MODULES

If a module is linked as an object file, it is always kept. That is, it will contribute to the linked application. However, if a module is part of a library, it is included only if it is symbolically referred to from other parts of the application. This is true, even if the library module contains a root symbol. To assure that such a library module is always included, use `iarchive` to extract the module from the library, see *The IAR Archive Tool—iarchive*, page 447.

For information about included and excluded modules, inspect the log file (the command line option `--log modules`).

For more information about modules, see *Modules and sections*, page 76.

## KEEPING SYMBOLS AND SECTIONS

By default, ILINK removes any sections, section fragments, and global symbols that are not needed by the application. To retain a symbol that does not appear to be needed—or actually, the section fragment it is defined in—you can either use the root attribute on the symbol in your C/C++ or assembler source code, or use the ILINK option `--keep`.

To retain sections based on attribute names or object names, use the directive `keep` in the linker configuration file.

To prevent ILINK from excluding sections and section fragments, use the command line options `--no_remove` or `--no_fragments`, respectively.

For information about included and excluded symbols and sections, inspect the log file (the command line option `--log_sections`).

For more information about the linking procedure for keeping symbols and sections, see *The linking process*, page 48.

## APPLICATION STARTUP

By default, the point where the application starts execution is defined by the `__iar_program_start` label, which is defined to point at the start of the `cstartup.s` file. The label is also communicated via ELF to any debugger that is used.

To change the start point of the application to another label, use the ILINK option `--entry`; see *--entry*, page 285.

## SETTING UP STACK MEMORY

The size of the `CSTACK` block is defined in the linker configuration file. To change the allocated amount of memory, change the block definition for `CSTACK`:

```
define block CSTACK with size = 0x2000, alignment = 8{ };
```

Specify an appropriate size for your application.

For more information about the stack, see *Stack considerations*, page 188.

## SETTING UP HEAP MEMORY

The size of the heap is defined in the linker configuration file as a block:

```
define block HEAP with size = 0x1000, alignment = 8{ };
place in RAM {block HEAP};
```

Specify the appropriate size for your application. If you use a heap, you must allocate at least 50 bytes for it.

## SETTING UP THE ATEXTIT LIMIT

By default, the `atexit` function can be called a maximum of 32 times from your application. To either increase or decrease this number, add a line to your configuration file. For example, to reserve room for 10 calls instead, write:

```
define symbol __iar_maximum_atexit_calls = 10;
```

## CHANGING THE DEFAULT INITIALIZATION

By default, memory initialization is performed during application startup. ILINK sets up the initialization process and chooses a suitable packing method. If the default initialization process does not suit your application and you want more precise control over the initialization process, these alternatives are available:

- Suppressing initialization
- Choosing the packing algorithm
- Manual initialization
- Initializing code—copying ROM to RAM.

For information about the performed initializations, inspect the log file (the command line option `--log initialization`).

### Suppressing initialization

If you do not want the linker to arrange for initialization by copying, for some or all sections, make sure that those sections do not match a pattern in an `initialize by copy` directive (or use an `except` clause to exclude them from matching). If you do not want any initialization by copying at all, you can omit the `initialize by copy` directive entirely.

This can be useful if your application, or just your variables, are loaded into RAM by some other mechanism before application startup.

### Choosing a packing algorithm

To override the default packing algorithm, write for example:

```
initialize by copy with packing = lzw { readwrite };
```

For more information about the available packing algorithms, see *Initialize directive*, page 418.

### Manual initialization

In the usual case, the `initialize by copy` directive is used for making the linker arrange for initialization by copying (with or without packing) of sections with content at application startup. The linker achieves this by logically creating an initialization section for each such section, holding the content of the section, and turning the original section into a section without content. Then, the linker adds table elements to the initialization table so that the initialization will be performed at application startup. You can use `initialize manually` to suppress the creation of table elements to take



control over when and how the elements are copied. This is useful for overlays, but also in a number of other circumstances.

For sections without content (zero-initialized sections), the situation is reversed. The linker arranges for zero initialization of all such sections at application startup, except for those that have been mentioned in a `do not initialize` directive. Usually, only `.noinit` sections are specified in a `do not initialize` directive, but you can add any zero-initialized sections you like, and take direct control over when and how these sections are initialized.

### **Simple copying example with an implicit block**

Assume that you have some initialized variables in `MYSECTION`. If you add this directive to your linker configuration file:

```
initialize manually { section MYSECTION };
```

you can use this source code example to initialize the section:

```
#pragma section = "MYSECTION"
#pragma section = "MYSECTION_init"

void DoInit()
{
    char * from = __section_begin("MYSECTION_init");
    char * to   = __section_begin("MYSECTION");
    memcpy(to, from, __section_size("MYSECTION"));
}
```

This piece of source code takes advantage of the fact that if you use `__section_begin` (and related operators) with a section name, a synthetic block is created by the linker for those sections.

### **Example with explicit blocks**

Assume that you instead of needing manual initialization for variables in a specific section, you need it for all initialized variables from a particular library. In that case, you must create explicit blocks for both the variables and the content. Like this:

```
initialize manually      { section .data      object mylib.a };
define block MYBLOCK     { section .data      object mylib.a };
define block MYBLOCK_init { section .data_init object mylib.a };
```

You must also place the two new blocks using one of the section placement directives, the block `MYBLOCK` in RAM and the block `MYBLOCK_init` in ROM.

Then you can initialize the sections using the same source code as in the previous example, only with `MYBLOCK` instead of `MYSECTION`.

**Overlay example**

This is a simple overlay example that takes advantage of automatic block creation:

```
initialize manually { section MYOVERLAY* };

define overlay MYOVERLAY { section MYOVERLAY1 };
define overlay MYOVERLAY { section MYOVERLAY2 };
```

You must also place `overlay MYOVERLAY` somewhere in RAM. The copying could look like this:

```
#pragma section = "MYOVERLAY"
#pragma section = "MYOVERLAY1_init"
#pragma section = "MYOVERLAY2_init"

void SwitchToOverlay1()
{
    char * from = __section_begin("MYOVERLAY1_init");
    char * to   = __section_begin("MYOVERLAY");
    memcpy(to, from, __section_size("MYOVERLAY1_init"));
}

void SwitchToOverlay2()
{
    char * from = __section_begin("MYOVERLAY2_init");
    char * to   = __section_begin("MYOVERLAY");
    memcpy(to, from, __section_size("MYOVERLAY2_init"));
}
```

**Initializing code—copying ROM to RAM**

Sometimes, an application copies pieces of code from flash/ROM to RAM. You can direct the linker to arrange for this to be done automatically at application startup, or do it yourself at some later time using the techniques described in *Manual initialization*, page 96.

You need to list the code sections that should be copied in an `initialize by copy` directive. The easiest way is usually to place the relevant functions in a particular section (for example, `RAMCODE`), and add `section RAMCODE` to your `initialize by copy` directive. For example:

```
initialize by copy { rw, section RAMCODE };
```

If you need to place the `RAMCODE` functions in some particular location, you must mention them in a placement directive, otherwise they will be placed together with other read/write sections.

If you need to control the manner and/or time of copying, you must use an `initialize manually` directive instead. See *Manual initialization*, page 96.

If the functions need to run without accessing the flash/ROM, you can use the `__ramfunc` keyword when compiling. See *Execution in RAM*, page 64.

## Running all code from RAM

If you want to copy the entire application from ROM to RAM at program startup, use the `initilize by copy` directive, for example:

```
initialize by copy { readonly, readwrite };
```

The `readwrite` pattern will match all statically initialized variables and arrange for them to be initialized at startup. The `readonly` pattern will do the same for all read-only code and data, except for code and data needed for the initialization.

To reduce the ROM space that is needed, it might be useful to compress the data with one of the available packing algorithms. For example,

```
initialize by copy with packing = lzw { readonly, readwrite };
```

For more information about the available compression algorithms, see *Initialize directive*, page 418.

Because the function `__low_level_init`, if present, is called before initialization, it, and anything it needs, will not be copied from ROM to RAM either. In some circumstances—for example, if the ROM contents are no longer available to the program after startup—you might need to avoid using the same functions during startup and in the rest of the code.

If anything else should not be copied, include it in an `except` clause. This can apply to, for example, the interrupt vector table.

It is also recommended to exclude the C++ dynamic initialization table from being copied to RAM, as it is typically only read once and then never referenced again. For example, like this:

```
initialize by copy { readonly, readwrite }
    except { section .intvec,          /* Don't copy
                                         interrupt table */
            section .init_array }; /* Don't copy
                                         C++ init table */
```

## INTERACTION BETWEEN ILINK AND THE APPLICATION

ILINK provides the command line options `--config_def` and `--define_symbol` to define symbols which can be used for controlling the application. You can also use symbols to represent the start and end of a continuous memory area that is defined in the

linker configuration file. For more information, see *Interaction between the tools and your application*, page 190.

To change a reference to one symbol to another symbol, use the ILINK command line option `--redirect`. This is useful, for example, to redirect a reference from a non-implemented function to a stub function, or to choose one of several different implementations of a certain function, for example, how to choose the DLIB formatter for the standard library functions `printf` and `scanf`.

The compiler generates mangled names to represent complex C/C++ symbols. If you want to refer to these symbols from assembler source code, you must use the mangled names.

For information about the addresses and sizes of all global (statically linked) symbols, inspect the entry list in the map file (the command line option `--map`).

For more information, see *Interaction between the tools and your application*, page 190.

## STANDARD LIBRARY HANDLING

By default, ILINK determines automatically which variant of the standard library to include during linking. The decision is based on the sum of the runtime attributes available in each object file and the library options passed to ILINK.

To disable the automatic inclusion of the library, use the option `--no_library_search`. In this case, you must explicitly specify every library file to be included. For information about available library files, see *Using prebuilt libraries*, page 105.

## PRODUCING OTHER OUTPUT FORMATS THAN ELF/DWARF

ILINK can only produce an output file in the ELF/DWARF format. To convert that format into a format suitable for programming PROM/flash, see *The IAR ELF Tool—ielftool*, page 450.

## VENEERS

The ARM cores need to use veneers on two occasions:

- When calling an ARM function from Thumb mode or vice versa; the veneer then changes the state of the microprocessor. The called function must be an interworking function, see *Interworking*, page 55. If the core supports the `BLX` instruction, a veneer is not needed for changing modes.
- When calling a function that it cannot normally reach; the veneer introduces code which makes the call successfully reach the destination.

Code for veneers can be inserted between any caller and called function. As a result, the R12 register must be treated as a scratch register at function calls, including functions written in assembler. This also applies to jumps.

For more information, see `--no_veneers`, page 296.

---

## Hints for troubleshooting

ILINK has several features that can help you manage code and data placement correctly, for example:

- Messages at link time, for examples when a relocation error occurs
- The `--log` option that makes ILINK log information to `stdout`, which can be useful to understand why an executable image became the way it is, see `--log`, page 290
- The `--map` option that makes ILINK produce a memory map file, which contains the result of the linker configuration file, see `--map`, page 291.

### RELOCATION ERRORS

For each instruction that cannot be relocated correctly, ILINK will generate a *relocation error*. This can occur for instructions where the target is out of reach or is of an incompatible type, or for many other reasons.

A relocation error produced by ILINK can look like this:

```
Error[Lp002]: relocation failed: out of range or illegal value
  Kind      :   R_XXX_YYY[0x1]
  Location  :   0x40000448
             "myfunc" + 0x2c
             Module:  somcode.o
             Section: 7 (.text)
             Offset:  0x2c
  Destination: 0x9000000c
             "read"
             Module:  read.o(iolib.a)
             Section: 6 (.text)
             Offset:  0x0
```

The message entries are described in this table:

Message entry	Description
Kind	The relocation directive that failed. The directive depends on the instruction used.

Table 4: Description of a relocation error

Message entry	Description
Location	<p>The location where the problem occurred, described with the following details:</p> <ul style="list-style-type: none"> <li>• The instruction address, expressed both as a hexadecimal value and as a label with an offset. In this example, <code>0x40000448</code> and <code>"myfunc" + 0x2c</code>.</li> <li>• The module, and the file. In this example, the module <code>somecode.o</code>.</li> <li>• The section number and section name. In this example, section number <code>7</code> with the name <code>.text</code>.</li> <li>• The offset, specified in number of bytes, in the section. In this example, <code>0x2c</code>.</li> </ul>
Destination	<p>The target of the instruction, described with the following details:</p> <ul style="list-style-type: none"> <li>• The instruction address, expressed both as a hexadecimal value and as a label with an offset. In this example, <code>0x9000000c</code> and <code>"read"</code> (thus, no offset).</li> <li>• The module, and when applicable the library. In this example, the module <code>read.o</code> and the library <code>iolib.a</code>.</li> <li>• The section number and section name. In this example, section number <code>6</code> with the name <code>.text</code>.</li> <li>• The offset, specified in number of bytes, in the section. In this example, <code>0x0</code>.</li> </ul>

Table 4: Description of a relocation error (Continued)

### Possible solutions

In this case, the distance from the instruction in `myfunc` to `__read` is too long for the branch instruction.

Possible solutions include ensuring that the two `.text` sections are allocated closer to each other or using some other calling mechanism that can reach the required distance. It is also possible that the referring function tried to refer to the wrong target and that this caused the range error.

Different range errors have different solutions. Usually, the solution is a variant of the ones presented above, in other words modifying either the code or the section placement.

# The DLIB runtime environment

The *DLIB runtime environment* describes the runtime environment in which an application executes. In particular, the chapter covers the DLIB runtime library and how you can optimize it for your application.

---

## Introduction to the runtime environment

The runtime environment is the environment in which your application executes. The runtime environment depends on the target hardware, the software environment, and the application code.

### RUNTIME ENVIRONMENT FUNCTIONALITY

The *runtime environment* supports Standard C and C++, including the standard template library. The runtime environment consists of the *runtime library*, which contains the functions defined by the C and the C++ standards, and include files that define the library interface (the system header files).

The runtime library is delivered both as prebuilt libraries and (depending on your product package) as source files, and you can find them in the product subdirectories `arm\lib` and `arm\src\lib`, respectively.

The runtime environment also consists of a part with specific support for the target system, which includes:

- Support for hardware features:
  - Direct access to low-level processor operations by means of *intrinsic* functions, such as functions for interrupt mask handling
  - Peripheral unit registers and interrupt definitions in include files
  - The Vector Floating Point (VFP) coprocessor.
- Runtime environment support, that is, startup and exit code and low-level interface to some library functions.
- A floating-point environment (*fenv*) that contains floating-point arithmetics support, see *fenv.h*, page 405.
- Special compiler support, for instance functions for switch handling or integer arithmetics.

For more information about AEABI compliance, see *AEABI compliance*, page 196.

For more information about the library, see the chapter *Library functions*.

## SETTING UP THE RUNTIME ENVIRONMENT

The IAR DLIB runtime environment can be used as is together with the debugger. However, to run the application on hardware, you must adapt the runtime environment. Also, to configure the most code-efficient runtime environment, you must determine your application and hardware requirements. The more functionality you need, the larger your code will become.

This is an overview of the steps involved in configuring the most efficient runtime environment for your target hardware:

- Choose which runtime library object file to use
 

It is not necessary to specify a library file explicitly, as ILINK automatically uses the correct library file. See *Using prebuilt libraries*, page 105.
- Choose which predefined runtime library configuration to use—Normal or Full
 

You can configure the level of support for certain library functionality, for example, locale, file descriptors, and multibyte characters. If you do not specify anything, a default library configuration file that matches the library object file is automatically used. To specify a library configuration explicitly, use the `--dlib_config` compiler option. See *Library configurations*, page 121.
- Optimize the size of the runtime library
 

You can specify the formatters used by the functions `printf`, `scanf`, and their variants, see *Choosing formatters for printf and scanf*, page 108.

You can also specify stack and heap size and placement, see *Setting up stack memory*, page 95, and *Setting up heap memory*, page 95, respectively.
- Include debug support for runtime and I/O debugging
 

The library offers support for mechanisms like redirecting standard input and output to the C-SPY Terminal I/O window and accessing files on the host computer, see *Application debug support*, page 111.
- Adapt the library for target hardware
 

The library uses a set of low-level functions for handling accesses to your target system. To make these accesses work, you must implement your own version of these functions. For example, to make `printf` write to an LCD display on your board, you must implement a target-adapted version of the low-level function `__write`, so that it can write characters to the display. To customize such functions, you need a good understanding of the library low-level interface, see *Adapting the library for target hardware*, page 114.



- Override library modules

If you have customized the library functionality, you need to make sure your versions of the library modules are used instead of the default modules. This can be done without rebuilding the entire library, see *Overriding library modules*, page 115.

- Customize system initialization

It is likely that you need to customize the source code for system initialization, for example, your application might need to initialize memory-mapped special function registers, or omit the default initialization of data sections. You do this by customizing the routine `__low_level_init`, which is executed before the data sections are initialized. See *System startup and termination*, page 117 and *Customizing system initialization*, page 120.

- Configure your own library configuration files

In addition to the prebuilt library configurations, you can make your own library configuration, but that requires that you *rebuild* the library. This gives you full control of the runtime environment. See *Building and using a customized library*, page 115.

- Manage a multithreaded environment

In a multithreaded environment, you must adapt the runtime library to treat all library objects according to whether they are global or local to a thread. See *Managing a multithreaded environment*, page 133.

- Check module consistency

You can use runtime model attributes to ensure that modules are built using compatible settings, see *Checking module consistency*, page 138.

---

## Using prebuilt libraries

The prebuilt runtime libraries are configured for different combinations of these features:

- Architecture
- CPU mode
- Byte order
- Library configuration—Normal or Full.
- Floating-point implementation.

The linker will automatically include the correct library object file and library configuration file. To explicitly specify a library configuration, use the `--dlib_config` option. For more information, see *Runtime environment*, page 56.

## LIBRARY FILENAME SYNTAX

The names of the libraries are constructed from these elements:

<code>{architecture}</code>	is the name of the architecture. It can be one of <code>4t</code> , <code>5E</code> , <code>6M</code> , or <code>7M</code> for the ARM architectures <code>v4T</code> , <code>v5TE</code> , <code>v6M</code> , or <code>v7M</code> , respectively. Libraries built for the <code>v5TE</code> architecture are also used for the <code>v6</code> architecture and later (except for <code>v6M</code> and <code>v7M</code> ).
<code>{cpu_mode}</code>	is one of <code>t</code> or <code>a</code> , for Thumb and ARM, respectively.
<code>{byte_order}</code>	is one of <code>l</code> or <code>b</code> for little-endian and big-endian, respectively
<code>{fp_implementation}</code>	is <code>_</code> when the library is compiled without VFP support, that is, using a software implementation floating-point functions,  and <code>v</code> when the library is compiled with VFP support for architectures VFPv2 or later. Libraries compiled with VFP support have two entries for each function with floating-point signature. One entry is compliant with the VFP variant of AAPCS base standard. The linker will use the VFP calling convention, and the base standard entry for other modules.
<code>{language}</code>	is <code>c</code> when the library is compiled for Standard C++ support, and <code>e</code> when compiled for Embedded C++ support.
<code>{lib_config}</code>	is one of <code>n</code> or <code>f</code> for normal and full, respectively.
<code>{debug_interface}</code>	is one of <code>s</code> , <code>b</code> or <code>i</code> , for the SWI/SVC mechanism, the BKPT mechanism, and the IAR-specific breakpoint mechanism, respectively. For more information, see <code>--semihosting</code> , page 299.
<code>{rwp_i}</code>	is <code>s</code> when the library contains read/write position-independent code, see <code>--rwp_i</code> , page 268.

**Note:** There are two library configuration files: `DLib_Config_Normal.h` and `DLib_Config_Full.h`.

You can find the library object files and the library configuration files in the subdirectory `arm\lib\`.

## GROUPS OF LIBRARY FILES

The libraries are delivered in groups of library functions:

### Library files for C library functions

These are the functions defined by Standard C, for example functions like `printf` and `scanf`. Note that this library does not include math functions.

The names of the library files are constructed in the following way:

```
dl{architecture}_{cpu_mode}{byte_order}{lib-config}{rwp1}.a
```

which more specifically means

```
dl{4t|5E|6M|7M}_{a|t}{l|b}{n|f}{s}.a
```

### Library files for C++ and Embedded C++ library functions

These are the functions defined by C++, compiled with support for either Standard C++ or Embedded C++.

The names of the library files are constructed in the following way:

```
d1pp{architecture}_{cpu_mode}{byte_order}{fp_implementation}
{lib-config}{language}.a
```

which more specifically means

```
d1pp{4t|5E|6M|7M}_{a|t}{l|b}{_|v}{n|f}{c|e}.a
```

### Library files for math functions

These are the functions for floating-point arithmetic and functions with a floating-point type in its signature as defined by Standard C, for example functions like `sqrt`.

The names of the library files are constructed in the following way:

```
m{architecture}_{cpu_mode}{byte_order}{fp_implementation}.a
```

which more specifically means

```
m{4t|5E|6M|7M}_{a|t}{l|b}{_|v}.a
```

### Library files for runtime support functions

These are functions for system startup, initialization, non floating-point AEABI support routines, and some of the functions that are part of Standard C and C++.

The names of the library files are constructed in the following way:

```
rt{architecture}_{cpu_mode}{byte_order}.a
```

which more specifically means

```
rt{4t|5E|6M|7M}_{a|t}<1|b}.a
```

### Library files for debug support functions

These are functions for debug support for the semihosting interface. The names of the library files are constructed in the following way:

```
sh{debug_interface}_{byte_order}.a
```

which more specifically means

```
sh{s|b|i}_{1|b}.a
```

## CUSTOMIZING A PREBUILT LIBRARY WITHOUT REBUILDING

The prebuilt libraries delivered with the compiler can be used as is. However, you can customize parts of a library without rebuilding it.

These items can be customized:

Items that can be customized	Described in
Formatters for printf and scanf	<i>Choosing formatters for printf and scanf</i> , page 108
Startup and termination code	<i>System startup and termination</i> , page 117
Low-level input and output	<i>Standard streams for input and output</i> , page 122
File input and output	<i>File input and output</i> , page 126
Low-level environment functions	<i>Environment interaction</i> , page 129
Low-level signal functions	<i>Signal and raise</i> , page 130
Low-level time functions	<i>Time</i> , page 130
Some library math functions	<i>Math functions</i> , page 130
Size of heaps, stacks, and sections	<i>Stack considerations</i> , page 188 <i>Heap considerations</i> , page 189 <i>Placing code and data—the linker configuration file</i> , page 79

Table 5: Customizable items

For information about how to override library modules, see *Overriding library modules*, page 115.

## Choosing formatters for printf and scanf

The linker automatically chooses an appropriate formatter for `printf`- and `scanf`-related function based on information from the compiler. If that information is missing or insufficient, for example if `printf` is used through a function pointer, if the

object file is old, etc, then the automatic choice is the Full formatter. In this case you might want to choose a formatter manually.

To override the default formatter for all the `printf`- and `scanf`-related functions, except for `wprintf` and `wscanf` variants, you simply set the appropriate library options. This section describes the different options available.

**Note:** If you rebuild the library, you can optimize these functions even further, see *Configuration symbols for `printf` and `scanf`*, page 124.

## CHOOSING A PRINTF FORMATTER

The `printf` function uses a formatter called `_Printf`. The full version is quite large, and provides facilities not required in many embedded applications. To reduce the memory consumption, three smaller, alternative versions are also provided in the Standard C/EC++ library.

This table summarizes the capabilities of the different formatters:

Formatting capabilities	Tiny	Small/ SmallNoMb	Large/ LargeNoMb	Full/ FullNoMb
Basic specifiers <code>c</code> , <code>d</code> , <code>i</code> , <code>o</code> , <code>p</code> , <code>s</code> , <code>u</code> , <code>X</code> , <code>x</code> , and <code>%</code>	Yes	Yes	Yes	Yes
Multibyte support	No	Yes/No	Yes/No	Yes/No
Floating-point specifiers <code>a</code> , and <code>A</code>	No	No	No	Yes
Floating-point specifiers <code>e</code> , <code>E</code> , <code>f</code> , <code>F</code> , <code>g</code> , and <code>G</code>	No	No	Yes	Yes
Conversion specifier <code>n</code>	No	No	Yes	Yes
Format flag <code>+</code> , <code>-</code> , <code>#</code> , <code>0</code> , and space	No	Yes	Yes	Yes
Length modifiers <code>h</code> , <code>l</code> , <code>L</code> , <code>s</code> , <code>t</code> , and <code>Z</code>	No	Yes	Yes	Yes
Field width and precision, including <code>*</code>	No	Yes	Yes	Yes
<code>long long</code> support	No	No	Yes	Yes

Table 6: Formatters for `printf`

For information about how to fine-tune the formatting capabilities even further, see *Configuration symbols for `printf` and `scanf`*, page 124.



### Manually specifying the print formatter in the IDE

To specify a formatter manually, choose **Project>Options** and select the **General Options** category. Select the appropriate option on the **Library options** page.



### Manually specifying the printf formatter from the command line

To specify a formatter manually, use one of these ILINK command line options:

```
--redirect _Printf=_PrintfFull
--redirect _Printf=_PrintfFullNoMb
--redirect _Printf=_PrintfLarge
--redirect _Printf=_PrintfLargeNoMb
--redirect _Printf=_PrintfSmall
--redirect _Printf=_PrintfSmallNoMb
--redirect _Printf=_PrintfTiny
--redirect _Printf=_PrintfTinyNoMb
```

## CHOOSING A SCANF FORMATTER

In a similar way to the `printf` function, `scanf` uses a common formatter, called `_Scanf`. The full version is quite large, and provides facilities that are not required in many embedded applications. To reduce the memory consumption, two smaller, alternative versions are also provided in the Standard C/C++ library.

This table summarizes the capabilities of the different formatters:

Formatting capabilities	Small/ SmallNoMb	Large/ LargeNoMb	Full/ FullNoMb
Basic specifiers <code>c</code> , <code>d</code> , <code>i</code> , <code>o</code> , <code>p</code> , <code>s</code> , <code>u</code> , <code>X</code> , <code>x</code> , and <code>%</code>	Yes	Yes	Yes
Multibyte support	Yes/No	Yes/No	Yes/No
Floating-point specifiers <code>a</code> , and <code>A</code>	No	No	Yes
Floating-point specifiers <code>e</code> , <code>E</code> , <code>f</code> , <code>F</code> , <code>g</code> , and <code>G</code>	No	No	Yes
Conversion specifier <code>n</code>	No	No	Yes
Scan set <code>[</code> and <code>]</code>	No	Yes	Yes
Assignment suppressing <code>*</code>	No	Yes	Yes
<code>long long</code> support	No	No	Yes

Table 7: Formatters for `scanf`

For information about how to fine-tune the formatting capabilities even further, see *Configuration symbols for printf and scanf*, page 124.



### Manually specifying the scanf formatter in the IDE

To specify a formatter manually, choose **Project>Options** and select the **General Options** category. Select the appropriate option on the **Library options** page.



## Manually specifying the scanf formatter from the command line

To specify a formatter manually, use one of these ILINK command line options:

```

--redirect _Scanf=_ScanfFull
--redirect _Scanf=_ScanfFullNoMb
--redirect _Scanf=_ScanfLarge
--redirect _Scanf=_ScanfLargeNoMb
--redirect _Scanf=_ScanfSmall
--redirect _Scanf=_ScanfSmallNoMb

```

## Application debug support

In addition to the tools that generate debug information, there is a debug version of the library low-level interface (typically, I/O handling and basic runtime support). Using the debug library, your application can perform things like opening a file on the host computer and redirecting `stdout` to the debugger Terminal I/O window.

### INCLUDING C-SPY DEBUGGING SUPPORT

You can make the library provide debugging support for:

- Handling program abort, exit, and assertions
- I/O handling, which means that `stdin` and `stdout` are redirected to the C-SPY Terminal I/O window, and that it is possible to access files on the host computer during debugging.

If you build your application project with the ILINK option **Semihosted** (`--semihosted`) or **IAR breakpoint** (`--semihosting=iar_breakpoint`), certain functions in the library are replaced by functions that communicate with the debugger.



To set linker options for debug support in the IDE, choose **Project>Options>General Options**. On the **Library configuration** page, select the **Semihosted** option or the **IAR breakpoint** option.

Note that for some Cortex-M devices it is also possible to direct `stdout/stderr` via SWO. This can significantly improve `stdout/stderr` performance compared to semihosting. For hardware requirement, see the *C-SPY® Debugging Guide for ARM*.



To enable `stdout` via SWO on the command line, use the linker option `--redirect __iar_sh_stdout=__iar_sh_stdout_swo`.



To enable `stdout` via SWO in the IDE, choose **Project>Options>General Options**. On the **Library configuration** page, select the **Semihosted** option and the **stdout/stderr via SWO** option.

## THE DEBUG LIBRARY FUNCTIONALITY

The debug library is used for communication between the application being debugged and the debugger itself. The debugger provides runtime services to the application via the low-level DLIB interface; services that allow capabilities like file and terminal I/O to be performed on the host computer.

These capabilities can be valuable during the early development of an application, for example in an application that uses file I/O before any flash file system I/O drivers are implemented. Or, if you need to debug constructions in your application that use `stdin` and `stdout` without the actual hardware device for input and output being available. Another use is producing debug printouts.

The low-level debugger runtime interface provided by DLIB is compatible with the semihosting interface provided by ARM Limited. When an application invokes a semihosting call, the execution stops at a debugger breakpoint. The debugger then handles the call, performs any necessary actions on the host computer and then resumes the execution.

### The semihosting mechanism

There are three variants of semihosting mechanisms available:

- For Cortex-M, the interface uses `BKPT` instructions to perform semihosting calls
- For other ARM cores, `SVC` instructions are used for the semihosting calls
- *IAR breakpoint*, which is an IAR-specific alternative to semihosting that uses `SVC`.

To support semihosting via `SVC`, the debugger must set its semihosting breakpoint on the Supervisor Call vector to catch `SVC` calls. If your application uses `SVC` calls for other purposes than semihosting, the handling of this breakpoint will cause a severe performance penalty for each such call. *IAR breakpoint* is a way to get around this. By using a special function call instead of an `SVC` instruction to perform semihosting, the semihosting breakpoint can be set on that special function instead. This means that semihosting will not interfere with other uses of the Supervisor Call vector.

Note that *IAR breakpoint* is an IAR-specific extension of the semihosting standard. If you link your application with libraries built with toolchains from other vendors than IAR Systems and use *IAR breakpoint*, semihosting calls made from code in those libraries will not work.

## THE C-SPY TERMINAL I/O WINDOW

To make the Terminal I/O window available, the application must be linked with support for I/O debugging. This means that when the functions `__read` or `__write` are called to perform I/O operations on the streams `stdin`, `stdout`, or `stderr`, data will be sent to or read from the C-SPY Terminal I/O window.



**Note:** The Terminal I/O window is not opened automatically just because `__read` or `__write` is called; you must open it manually.

For more information about the Terminal I/O window, see the *C-SPY® Debugging Guide for ARM*.

## Speeding up terminal output

On some systems, terminal output might be slow because the host computer and the target hardware must communicate for each character.

For this reason, a replacement for the `__write` function called `__write_buffered` is included in the DLIB library. This module buffers the output and sends it to the debugger one line at a time, speeding up the output. Note that this function uses about 80 bytes of RAM memory.

To use this feature you can either choose **Project>Options>General Options>Library Options>** and select the option **Buffered terminal output** in the IDE, or add this to the linker command line:

```
--redirect __write=__write_buffered
```

## LOW-LEVEL FUNCTIONS IN THE DEBUG LIBRARY

The debug library contains implementations of the following low-level functions:

Function in DLIB low-level interface	Response by C-SPY
<code>abort</code>	Exits the application
<code>clock</code>	Returns the clock on the host computer
<code>__close</code>	Closes the associated host file on the host computer
<code>__exit</code>	Notifies that the end of the application was reached
<code>__lseek</code>	Searches in the associated host file on the host computer
<code>__open</code>	Opens a file on the host computer
<code>__read</code>	Directs <code>stdin</code> to the Terminal I/O window; all other files will read the associated host file
<code>remove</code>	Removes a file on the host computer
<code>rename</code>	Renames a file on the host computer
<code>__iar_ReportAssert</code>	Prints an assert message to terminal I/O
<code>system</code>	Writes a message to the Debug Log window and returns <code>-1</code>
<code>time</code>	Returns the time on the host computer

Table 8: Functions with special meanings when linked with debug library

Function in DLIB low-level interface	Response by C-SPY
<code>__write</code>	Directs <code>stdout</code> and <code>stderr</code> to the Terminal I/O window; all other files will write to the associated host file

Table 8: Functions with special meanings when linked with debug library (Continued)

**Note:** You should not use the low-level interface functions prefixed with `_` or `__` directly in your application. Instead you should use the high-level functions that use these functions. For more information, see *Library low-level interface*, page 114.

## Adapting the library for target hardware

The library uses a set of low-level functions for handling accesses to your target system. To make these accesses work, you must implement your own version of these functions. These low-level functions are referred to as the *library low-level interface*.

When you have implemented your low-level interface, you must add your version of these functions to your project. For information about this, see *Overriding library modules*, page 115.

### LIBRARY LOW-LEVEL INTERFACE

The library uses a set of low-level functions to communicate with the target system. For example, `printf` and all other standard output functions use the low-level function `__write` to send the actual characters to an output device. Most of the low-level functions, like `__write`, have no implementation. Instead, you must implement them yourself to match your hardware.

However, the library contains a debug version of the library low-level interface, where the low-level functions are implemented so that they interact with the host computer via the debugger, instead of with the target hardware. If you use the debug library, your application can perform tasks like writing to the Terminal I/O window, accessing files on the host computer, getting the time from the host computer, etc. For more information, see *The debug library functionality*, page 112.

Note that your application should not use the low-level functions directly. Instead you should use the corresponding standard library function. For example, to write to `stdout`, you should use standard library functions like `printf` or `puts`, instead of `__write`.

The library files that you can override with your own versions are located in the `arm\src\lib` directory.

The low-level interface is further described in these sections:

- *Standard streams for input and output*, page 122

- *File input and output*, page 126
- *Signal and raise*, page 130
- *Time*, page 130
- *Assert*, page 132.

---

## Overriding library modules

To use a library low-level interface that you have implemented, add it to your application. See *Adapting the library for target hardware*, page 114. Or, you might want to override a default library routine with your customized version. In both cases, follow this procedure:

- 1 Use a template source file—a library source file or another template—and copy it to your project directory.
- 2 Modify the file.
- 3 Add the customized file to your project, like any other source file.

**Note:** If you have implemented a library low-level interface and added it to a project that you have built with debug support, your low-level functions will be used and not the C-SPY debug support modules. For example, if you replace the debug support module `__write` with your own version, the C-SPY Terminal I/O window will not be supported.

The library files that you can override with your own versions are located in the `arm\src\lib` directory.

---

## Building and using a customized library

Building a customized library is a complex process. Therefore, consider carefully whether it is really necessary. You must build your own C/C++ standard library when:

- You want to define your own library configuration with support for locale, file descriptors, multibyte characters, etc.

In those cases, you must:

- Set up a library project
- Make the required library modifications
- Build your customized library
- Finally, make sure your application project will use the customized library.

**Note:** To build IAR Embedded Workbench projects from the command line, use the IAR Command Line Build Utility (`iarbuild.exe`). However, no make or batch files for building the library from the command line are provided.

For information about the build process and the IAR Command Line Build Utility, see the *IDE Project Management and Building Guide for ARM*.

## SETTING UP A LIBRARY PROJECT

The IDE provides a library project template which can be used for customizing the runtime environment configuration. This library template uses the Full library configuration, see Table 9, *Library configurations*.



In the IDE, modify the generic options in the created library project to suit your application, see *Basic project configuration*, page 54.

**Note:** There is one important restriction on setting options. If you set an option on file level (file level override), no options on higher levels that operate on files will affect that file.

## MODIFYING THE LIBRARY FUNCTIONALITY

You must modify the library configuration file and build your own library if you want to modify support for, for example, locale, file descriptors, and multibyte characters. This will include or exclude certain parts of the runtime environment.

The library functionality is determined by a set of *configuration symbols*. The default values of these symbols are defined in the file `DLib_Defaults.h`. This read-only file describes the configuration possibilities. In addition, your library has its own library configuration file, which sets up that specific library with the required library configuration. For more information, see *Customizing a prebuilt library without rebuilding*, page 108.

The library configuration file is used for tailoring a build of the runtime library, and for tailoring the system header files.

### Modifying the library configuration file

In your library project, open the library configuration file and customize it by setting the values of the configuration symbols according to the application requirements.

When you are finished, build your library project with the appropriate project options.

## USING A CUSTOMIZED LIBRARY

After you build your library, you must make sure to use it in your application project.

In the IDE you must do these steps:

- 1 Choose **Project>Options** and click the **Library Configuration** tab in the **General Options** category.
- 2 Choose **Custom DLIB** from the **Library** drop-down menu.
- 3 In the **Configuration file** text box, locate your library configuration file.
- 4 Click the **Library** tab, also in the **Linker** category. Use the **Additional libraries** text box to locate your library file.

---

## System startup and termination

This section describes the runtime environment actions performed during startup and termination of your application.


The code for handling startup and termination is located in the source files `cstartup.s`, `cmain.s`, `cexit.s`, and `low_level_init.c` located in the `arm\src\lib` directory.

For information about how to customize the system startup code, see *Customizing system initialization*, page 120.

### SYSTEM STARTUP


During system startup, an initialization sequence is executed before the `main` function is entered. This sequence performs initializations required for the target hardware and the C/C++ environment.

For the hardware initialization, it looks like this:

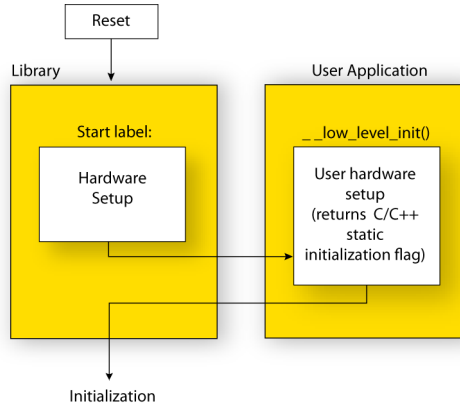

- When the CPU is reset it will start executing at the program entry label `__iar_program_start` in the system startup code.
- The stack pointer is initialized to the end of the `CSTACK` block
- For ARM7/9/11, Cortex-A, and Cortex-R devices, exception stack pointers are initialized to the end of each corresponding section
- The function `__low_level_init` is called if you defined it, giving the application a chance to perform early initializations.

For the C/C++ initialization, it looks like this:

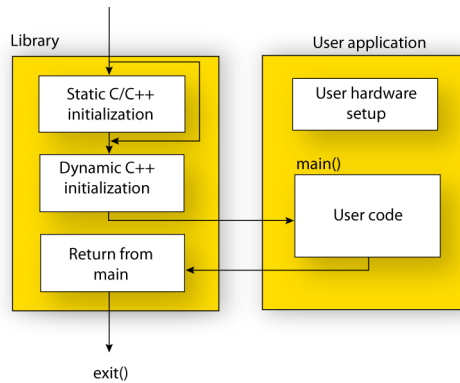


- Static and global variables are initialized. That is, zero-initialized variables are cleared and the values of other initialized variables are copied from ROM to RAM memory. This step is skipped if `__low_level_init` returns zero. For more information, see *Initialization at system startup*, page 81

- Static C++ objects are constructed
- The `main` function is called, which starts the application.

For information about the initialization phase, see *Application execution—an overview*, page 50.

## SYSTEM TERMINATION

This illustration shows the different ways an embedded application can terminate in a controlled way:

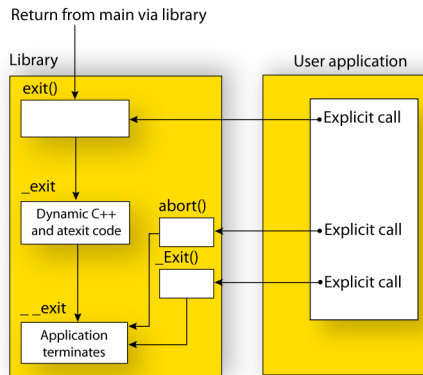

An application can terminate normally in two different ways:

- Return from the `main` function
- Call the `exit` function.

Because the C standard states that the two methods should be equivalent, the system startup code calls the `exit` function if `main` returns. The parameter passed to the `exit` function is the return value of `main`.

The default `exit` function is written in C. It calls a small assembler function `__exit` that will perform these operations:

- Call functions registered to be executed when the application ends. This includes C++ destructors for static and global variables, and functions registered with the standard function `atexit`
- Close all open files
- Call `__exit`
- When `__exit` is reached, stop the system.

An application can also exit by calling the `abort` or the `_Exit` function. The `abort` function just calls `__exit` to halt the system, and does not perform any type of cleanup. The `_Exit` function is equivalent to the `abort` function, except for the fact that `_Exit` takes an argument for passing exit status information.

If you want your application to do anything extra at exit, for example resetting the system, you can write your own implementation of the `__exit(int)` function.

### C-SPY interface to system termination

If your project is linked with the semihosted interface, the normal `__exit` function is replaced with a special one. C-SPY will then recognize when this function is called and can take appropriate actions to simulate program termination. For more information, see *Application debug support*, page 111.

---

## Customizing system initialization

It is likely that you need to customize the code for system initialization. For example, your application might need to initialize memory-mapped special function registers (SFRs), or omit the default initialization of data sections performed by `cstartup`.

You can do this by providing a customized version of the routine `__low_level_init`, which is called from `cmain.s` before the data sections are initialized. Modifying the file `cstartup.s` directly should be avoided.

For Cortex-M, the code for handling system startup is located in the source files `cstartup_M.s` and `low_level_init.c`, located in the `arm\src\lib` directory.

For other ARM devices, the code for handling system startup is located in the source files `cstartup.s` and `low_level_init.c`, located in the `arm\src\lib` directory.

**Note:** Normally, you do not need to customize either of the files `cmain.s` or `cexit.s`.

If you intend to rebuild the library, the source files are available in the template library project, see *Building and using a customized library*, page 115.

**Note:** Regardless of whether you modify the routine `__low_level_init` or the file `cstartup.s`, you do not have to rebuild the library.

### \_\_LOW\_LEVEL\_INIT

A skeleton low-level initialization file is supplied with the product: `low_level_init.c`. Note that static initialized variables cannot be used within the file, because variable initialization has not been performed at this point.



The value returned by `__low_level_init` determines whether or not data sections should be initialized by the system startup code. If the function returns 0, the data sections will not be initialized.

## MODIFYING THE FILE CSTARTUP.S

As noted earlier, you should not modify the file `cstartup.s` if a customized version of `__low_level_init` is enough for your needs. However, if you do need to modify the file `cstartup.s`, we recommend that you follow the general procedure for creating a modified copy of the file and adding it to your project, see *Overriding library modules*, page 115.

Note that you must make sure that the linker uses the start label used in your version of `cstartup.s`. For information about how to change the start label used by the linker, see *--entry*, page 285.

For Cortex-M, you must create a modified copy of `cstartup_M.s` or `cstartup_M.c` to use interrupts or other exception handlers.

---

## Library configurations

It is possible to configure the level of support for, for example, locale, file descriptors, multibyte characters.

The runtime library configuration is defined in the *library configuration file*. It contains information about what functionality is part of the runtime environment. The configuration file is used for tailoring a build of a runtime library, and tailoring the system header files used when compiling your application. The less functionality you need in the runtime environment, the smaller it becomes.

The library functionality is determined by a set of *configuration symbols*. The default values of these symbols are defined in the file `DLib_Defaults.h`. This read-only file describes the configuration possibilities.

These predefined library configurations are available:

Library configuration	Description
Normal DLIB (default)	No locale interface, C locale, no file descriptor support, and no multibyte characters in <code>printf</code> and <code>scanf</code> .
Full DLIB	Full locale interface, C locale, file descriptor support, and multibyte characters in <code>printf</code> and <code>scanf</code> .

Table 9: Library configurations

## CHOOSING A RUNTIME CONFIGURATION

To choose a runtime configuration, use one of these methods:

- Default prebuilt configuration—if you do not specify a library configuration explicitly you will get the default configuration. A configuration file that matches the runtime library object file will automatically be used.
- Prebuilt configuration of your choice—to specify a runtime configuration explicitly, use the `--dlib_config` compiler option. See *--dlib\_config*, page 246.
- Your own configuration—you can define your own configurations, which means that you must modify the configuration file. Note that the library configuration file describes how a library was built and thus cannot be changed unless you rebuild the library. For more information, see *Building and using a customized library*, page 115.

The prebuilt libraries are based on the default configurations, see *Library configurations*, page 121.

---

## Standard streams for input and output

Standard communication channels (streams) are defined in `stdio.h`. If any of these streams are used by your application, for example by the functions `printf` and `scanf`, you must customize the low-level functionality to suit your hardware.

There are low-level I/O functions, which are the fundamental functions through which C and C++ performs all character-based I/O. For any character-based I/O to be available, you must provide definitions for these functions using whatever facilities the hardware environment provides. For more information about implementing low-level functions, see *Adapting the library for target hardware*, page 114.

### IMPLEMENTING LOW-LEVEL CHARACTER INPUT AND OUTPUT

To implement low-level functionality of the `stdin` and `stdout` streams, you must write the functions `__read` and `__write`, respectively. You can find template source code for these functions in the `arm\src\lib` directory.

If you intend to rebuild the library, the source files are available in the template library project, see *Building and using a customized library*, page 115. Note that customizing the low-level routines for input and output does not require you to rebuild the library.

**Note:** If you write your own variants of `__read` or `__write`, special considerations for the C-SPY runtime interface are needed, see *Application debug support*, page 111.

### Example of using `__write`

The code in this example uses memory-mapped I/O to write to an LCD display, whose port is assumed to be located at address `0x1000`:

```
#include <stddef.h>

__no_init volatile unsigned char lcdIO @ 0x1000;

size_t __write(int handle,
               const unsigned char *buf,
               size_t bufSize)
{
    size_t nChars = 0;

    /* Check for the command to flush all handles */
    if (handle == -1)
    {
        return 0;
    }

    /* Check for stdout and stderr
       (only necessary if FILE descriptors are enabled.) */
    if (handle != 1 && handle != 2)
    {
        return -1;
    }

    for (/* Empty */; bufSize > 0; --bufSize)
    {
        lcdIO = *buf;
        ++buf;
        ++nChars;
    }

    return nChars;
}
```

**Note:** When DLIB calls `__write`, DLIB assumes the following interface: a call to `__write` where `buf` has the value `NULL` is a command to flush the stream. When the `handle` is `-1`, all streams should be flushed.

### Example of using `__read`

The code in this example uses memory-mapped I/O to read from a keyboard, whose port is assumed to be located at 0x1000:

```

#include <stddef.h>

__no_init volatile unsigned char kbIO @ 0x1000;

size_t __read(int handle,
              unsigned char *buf,
              size_t bufSize)
{
    size_t nChars = 0;

    /* Check for stdin
       (only necessary if FILE descriptors are enabled) */
    if (handle != 0)
    {
        return -1;
    }

    for (/*Empty*/; bufSize > 0; --bufSize)
    {
        unsigned char c = kbIO;
        if (c == 0)
            break;

        *buf++ = c;
        ++nChars;
    }

    return nChars;
}

```

For information about the @ operator, see *Controlling data and function placement in memory*, page 204.

---

## Configuration symbols for printf and scanf

When you set up your application project, you typically need to consider what `printf` and `scanf` formatting capabilities your application requires, see *Choosing formatters for printf and scanf*, page 108.

If the provided formatters do not meet your requirements, you can customize the full formatters. However, that means you must rebuild the runtime library.

The default behavior of the `printf` and `scanf` formatters are defined by configuration symbols in the file `DLib_Defaults.h`.

These configuration symbols determine what capabilities the function `printf` should have:

Printf configuration symbols	Includes support for
<code>_DLIB_PRINTF_MULTIBYTE</code>	Multibyte characters
<code>_DLIB_PRINTF_LONG_LONG</code>	Long long (ll qualifier)
<code>_DLIB_PRINTF_SPECIFIER_FLOAT</code>	Floating-point numbers
<code>_DLIB_PRINTF_SPECIFIER_A</code>	Hexadecimal floating-point numbers
<code>_DLIB_PRINTF_SPECIFIER_N</code>	Output count (%n)
<code>_DLIB_PRINTF_QUALIFIERS</code>	Qualifiers h, l, L, v, t, and z
<code>_DLIB_PRINTF_FLAGS</code>	Flags -, +, #, and 0
<code>_DLIB_PRINTF_WIDTH_AND_PRECISION</code>	Width and precision
<code>_DLIB_PRINTF_CHAR_BY_CHAR</code>	Output char by char or buffered

Table 10: Descriptions of `printf` configuration symbols

When you build a library, these configurations determine what capabilities the function `scanf` should have:

Scanf configuration symbols	Includes support for
<code>_DLIB_SCANF_MULTIBYTE</code>	Multibyte characters
<code>_DLIB_SCANF_LONG_LONG</code>	Long long (ll qualifier)
<code>_DLIB_SCANF_SPECIFIER_FLOAT</code>	Floating-point numbers
<code>_DLIB_SCANF_SPECIFIER_N</code>	Output count (%n)
<code>_DLIB_SCANF_QUALIFIERS</code>	Qualifiers h, j, l, t, z, and L
<code>_DLIB_SCANF_SCANSET</code>	Scanset ([*])
<code>_DLIB_SCANF_WIDTH</code>	Width
<code>_DLIB_SCANF_ASSIGNMENT_SUPPRESSING</code>	Assignment suppressing ([*])

Table 11: Descriptions of `scanf` configuration symbols

## CUSTOMIZING FORMATTING CAPABILITIES

To customize the formatting capabilities, you must:

- 1 Set up a library project, see *Building and using a customized library*, page 115.
- 2 Define the configuration symbols according to your application requirements.

---

## File input and output

The library contains a large number of powerful functions for file I/O operations, such as `fopen`, `fclose`, `fprintf`, `fputs`, etc. All these functions call a small set of low-level functions, each designed to accomplish one particular task; for example, `__open` opens a file, and `__write` outputs characters. Before your application can use the library functions for file I/O operations, you must implement the corresponding low-level function to suit your target hardware. For more information, see *Adapting the library for target hardware*, page 114.

Note that file I/O capability in the library is only supported by libraries with the full library configuration, see *Library configurations*, page 121. In other words, file I/O is supported when the configuration symbol `__DLIB_FILE_DESCRIPTOR` is enabled. If not enabled, functions taking a `FILE *` argument cannot be used.

Template code for these I/O files is included in the product:

I/O function	File	Description
<code>__close</code>	<code>close.c</code>	Closes a file.
<code>__lseek</code>	<code>lseek.c</code>	Sets the file position indicator.
<code>__open</code>	<code>open.c</code>	Opens a file.
<code>__read</code>	<code>read.c</code>	Reads a character buffer.
<code>__write</code>	<code>write.c</code>	Writes a character buffer.
<code>remove</code>	<code>remove.c</code>	Removes a file.
<code>rename</code>	<code>rename.c</code>	Renames a file.

*Table 12: Low-level I/O files*

The low-level functions identify I/O streams, such as an open file, with a file descriptor that is a unique integer. The I/O streams normally associated with `stdin`, `stdout`, and `stderr` have the file descriptors 0, 1, and 2, respectively.

**Note:** If you link your application with I/O debug support, C-SPY variants of the low-level I/O functions are linked for interaction with C-SPY. For more information, see *Application debug support*, page 111.

---

## Locale

*Locale* is a part of the C language that allows language- and country-specific settings for several areas, such as currency symbols, date and time, and multibyte character encoding.

Depending on what runtime library you are using you get different level of locale support. However, the more locale support, the larger your code will get. It is therefore necessary to consider what level of support your application needs.

The DLIB library can be used in two main modes:

- With locale interface, which makes it possible to switch between different locales during runtime
- Without locale interface, where one selected locale is hardwired into the application.

## LOCALE SUPPORT IN PREBUILT LIBRARIES

The level of locale support in the prebuilt libraries depends on the library configuration.

- All prebuilt libraries support the C locale only
- All libraries with *full library configuration* have support for the locale interface. For prebuilt libraries with locale interface, it is by default only supported to switch multibyte character encoding at runtime.
- Libraries with *normal library configuration* do not have support for the locale interface.

If your application requires a different locale support, you must rebuild the library.

## CUSTOMIZING THE LOCALE SUPPORT

If you decide to rebuild the library, you can choose between these locales:

- The Standard C locale
- The POSIX locale
- A wide range of European locales.

### Locale configuration symbols

The configuration symbol `_DLIB_FULL_LOCALE_SUPPORT`, which is defined in the library configuration file, determines whether a library has support for a locale interface or not. The locale configuration symbols `_LOCALE_USE_LANG_REGION` and `_ENCODING_USE_ENCODING` define all the supported locales and encodings:

```
#define _DLIB_FULL_LOCALE_SUPPORT 1
#define _LOCALE_USE_C /* C locale */
#define _LOCALE_USE_EN_US /* American English */
#define _LOCALE_USE_EN_GB /* British English */
#define _LOCALE_USE_SV_SE /* Swedish in Sweden */
```

See `DLib_Defaults.h` for a list of supported locale and encoding settings.

If you want to customize the locale support, you simply define the locale configuration symbols required by your application. For more information, see *Building and using a customized library*, page 115.

**Note:** If you use multibyte characters in your C or assembler source code, make sure that you select the correct locale symbol (the local host locale).

### Building a library without support for locale interface

The locale interface is not included if the configuration symbol `_DLIB_FULL_LOCALE_SUPPORT` is set to 0 (zero). This means that a hardwired locale is used—by default the Standard C locale—but you can choose one of the supported locale configuration symbols. The `setlocale` function is not available and can therefore not be used for changing locales at runtime.

### Building a library with support for locale interface

Support for the locale interface is obtained if the configuration symbol `_DLIB_FULL_LOCALE_SUPPORT` is set to 1. By default, the Standard C locale is used, but you can define as many configuration symbols as required. Because the `setlocale` function will be available in your application, it will be possible to switch locales at runtime.

## CHANGING LOCALES AT RUNTIME

The standard library function `setlocale` is used for selecting the appropriate portion of the application's locale when the application is running.

The `setlocale` function takes two arguments. The first one is a locale category that is constructed after the pattern `LC_CATEGORY`. The second argument is a string that describes the locale. It can either be a string previously returned by `setlocale`, or it can be a string constructed after the pattern:

*lang\_REGION*

or

*lang\_REGION.encoding*

The *lang* part specifies the language code, and the *REGION* part specifies a region qualifier, and *encoding* specifies the multibyte character encoding that should be used.

The *lang\_REGION* part matches the `_LOCALE_USE_LANG_REGION` preprocessor symbols that can be specified in the library configuration file.



## Example

This example sets the locale configuration symbols to Swedish to be used in Finland and UTF8 multibyte character encoding:

```
setlocale (LC_ALL, "sv_FI.UTF8");
```

---

## Environment interaction

According to the C standard, your application can interact with the environment using the functions `getenv` and `system`.

**Note:** The `putenv` function is not required by the standard, and the library does not provide an implementation of it.

### THE GETENV FUNCTION

The `getenv` function searches the string, pointed to by the global variable `__environ`, for the key that was passed as argument. If the key is found, the value of it is returned, otherwise 0 (zero) is returned. By default, the string is empty.

To create or edit keys in the string, you must create a sequence of null terminated strings where each string has the format:

```
key=value\0
```

End the string with an extra null character (if you use a C string, this is added automatically). Assign the created sequence of strings to the `__environ` variable.

For example:

```
const char MyEnv[] = "Key=Value\0Key2=Value2\0";
__environ = MyEnv;
```

If you need a more sophisticated environment variable handling, you should implement your own `getenv`, and possibly `putenv` function. This does not require that you rebuild the library. You can find source templates in the files `getenv.c` and `environ.c` in the `arm\src\lib` directory. For information about overriding default library modules, see *Overriding library modules*, page 115.

### THE SYSTEM FUNCTION

If you need to use the `system` function, you must implement it yourself. The `system` function available in the library simply returns -1.

If you decide to rebuild the library, you can find source templates in the library project template. For more information, see *Building and using a customized library*, page 115.

**Note:** If you link your application with support for I/O debugging, the `system` function is replaced by a C-SPY variant. For more information, see *Application debug support*, page 111.

---

## Signal and raise

Default implementations of the functions `signal` and `raise` are available. If these functions do not provide the functionality that you need, you can implement your own versions.

This does not require that you rebuild the library. You can find source templates in the files `signal.c` and `raise.c` in the `arm\src\lib` directory. For information about overriding default library modules, see *Overriding library modules*, page 115.

If you decide to rebuild the library, you can find source templates in the library project template. For more information, see *Building and using a customized library*, page 115.

---

## Time

To make the `__time32`, `__time64`, and `date` functions work, you must implement the functions `clock`, `__time32`, `__time64`, and `__getzone`. Whether you use `__time32` or `__time64` depends on which interface you use for `time_t`, see *time.h*, page 406.

To implement these functions does not require that you rebuild the library. You can find source templates in the files `clock.c`, `time.c`, `time64.c`, and `getzone.c` in the `arm\src\lib` directory. For information about overriding default library modules, see *Overriding library modules*, page 115.

If you decide to rebuild the library, you can find source templates in the library project template. For more information, see *Building and using a customized library*, page 115.

The default implementation of `__getzone` specifies UTC (Coordinated Universal Time) as the time zone.

**Note:** If you link your application with support for I/O debugging, the functions `clock` and `time` are replaced by C-SPY variants that return the host clock and time respectively. For more information, see *Application debug support*, page 111.

---

## Math functions

Some library math functions are also available size-optimized versions, and in more accurate versions.

## SMALLER VERSIONS

The functions `cos`, `exp`, `log`, `log10`, `pow`, `sin`, `tan`, and `__iar_Sin` (a help function for `sin` and `cos`) exist in additional, smaller versions in the library. They are about 20% smaller and about 20% faster than the default versions. The functions handle INF and NaN values. The drawbacks are that they almost always lose some precision and they do not have the same input range as the default versions.

The names of the functions are constructed like:

```
__iar_xxx_small<f|l>
```

where `f` is used for `float` variants, `l` is used for `long double` variants, and no suffix is used for `double` variants.

To use these functions, the default function names must be redirected to these names when linking, using the following options:

```
--redirect sin=__iar_sin_small
--redirect cos=__iar_cos_small
--redirect tan=__iar_tan_small
--redirect log=__iar_log_small
--redirect log10=__iar_log10_small
--redirect exp=__iar_exp_small
--redirect pow=__iar_pow_small
--redirect __iar_Sin=__iar_Sin_small

--redirect sinf=__iar_sin_smallf
--redirect cosf=__iar_cos_smallf
--redirect tanf=__iar_tan_smallf
--redirect logf=__iar_log_smallf
--redirect log10f=__iar_log10_smallf
--redirect expf=__iar_exp_smallf
--redirect powf=__iar_pow_smallf
--redirect __iar_FSin=__iar_Sin_smallf

--redirect sinl=__iar_sin_smalll
--redirect cosl=__iar_cos_smalll
--redirect tanl=__iar_tan_smalll
--redirect logl=__iar_log_smalll
--redirect log10l=__iar_log10_smalll
--redirect expl=__iar_exp_smalll
--redirect powl=__iar_pow_smalll
--redirect __iar_LSin=__iar_Sin_smalll
```

Note that if `cos` or `sin` is redirected, `__iar_Sin` must be redirected as well.

## MORE ACCURATE VERSIONS

The functions `cos`, `pow`, `sin`, and `tan`, and the help functions `__iar_Sin` and `__iar_Pow` exist in versions in the library that are more exact and can handle larger argument ranges. The drawback is that they are larger and slower than the default versions.

The names of the functions are constructed like:

```
__iar_xxx_accurate<f|l>
```

where `f` is used for `float` variants, `l` is used for `long double` variants, and no suffix is used for `double` variants.

To use these functions, the default function names must be redirected to these names when linking, using the following options:

```
--redirect sin=__iar_sin_accurate
--redirect cos=__iar_cos_accurate
--redirect tan=__iar_tan_accurate
--redirect pow=__iar_pow_accurate
--redirect __iar_Sin=__iar_Sin_accurate
--redirect __iar_Pow=__iar_Pow_accurate

--redirect sinf=__iar_sin_accuratef
--redirect cosf=__iar_cos_accuratef
--redirect tanf=__iar_tan_accuratef
--redirect powf=__iar_pow_accuratef
--redirect __iar_FSin=__iar_Sin_accuratef
--redirect __iar_FPow=__iar_Pow_accuratef

--redirect sinl=__iar_sin_accuratel
--redirect cosl=__iar_cos_accuratel
--redirect tanl=__iar_tan_accuratel
--redirect powl=__iar_pow_accuratel
--redirect __iar_LSin=__iar_Sin_accuratel
--redirect __iar_LPow=__iar_Pow_accuratel
```

Note that if `cos` or `sin` is redirected, `__iar_Sin` must be redirected as well. The same applies to `pow` and `__iar_Pow`.

---

## Assert

If you linked your application with the option **Semihosted** or **IAR breakpoint**, C-SPY will be notified about failed asserts. If this is not the behavior you require, you can add the source file `assert.c` to your application project. The `__aeabi_assert` function generates the assert notification. You can find template code in the `arm\src\lib`

directory. For more information, see *Overriding library modules*, page 115. To turn off assertions, you must define the symbol `NDEBUG`.



In the IDE, this symbol `NDEBUG` is by default defined in a Release project and *not* defined in a Debug project. If you build from the command line, you must explicitly define the symbol according to your needs. See *NDEBUG*, page 397.

---

## Atexit

The linker allocates a static memory area for `atexit` function calls. By default, the number of calls to the `atexit` function are limited to 32. To change this limit, see *Setting up the atexit limit*, page 95.

---

## Managing a multithreaded environment

In a multithreaded environment, the standard library must treat all library objects according to whether they are global or local to a thread. If an object is a true global object, any updates of its state must be guarded by a locking mechanism to make sure that only one thread can update it at any given time. If an object is local to a thread, the static variables containing the object state must reside in a variable area local to that thread. This area is commonly named *thread-local storage* (TLS).

Prebuilt libraries with multithreaded support are provided in the product installation.

The low-level implementations of locks and TLS are system-specific, and is not included in the DLIB library. If you are using an RTOS, check if it provides some or all of the required functions. Otherwise, you must provide your own.

### MULTITHREAD SUPPORT IN THE DLIB LIBRARY

The DLIB library uses two kinds of locks—*system locks* and *file stream locks*. The file stream locks are used as guards when the state of a file stream is updated, and are only needed in the Full library configuration. The following objects are guarded with system locks:

- The heap, in other words when `malloc`, `new`, `free`, `delete`, `realloc`, or `calloc` is used.
- The file system (only available in the Full library configuration), but not the file streams themselves. The file system is updated when a stream is opened or closed, in other words when `fopen`, `fclose`, `fdopen`, `fflush`, or `freopen` is used.
- The signal system, in other words when `signal` is used.
- The temporary file system, in other words when `tmpnam` is used.
- Dynamically initialized function local objects with static storage duration.

These library objects use TLS:

Library objects using TLS	When these functions are used
Error functions	<code>errno</code> , <code>strerror</code>
Locale functions	<code>localeconv</code> , <code>setlocale</code>
Time functions	<code>asctime</code> , <code>localtime</code> , <code>gmtime</code> , <code>mktime</code>
Multibyte functions	<code>mbrlen</code> , <code>mbrtowc</code> , <code>mbsrtowc</code> , <code>mbtowc</code> , <code>wcrtomb</code> , <code>wcsrtomb</code> , <code>wctomb</code>
Rand functions	<code>rand</code> , <code>srand</code>
C++ exception engine	N/A
Miscellaneous functions	<code>atexit</code> , <code>strtok</code>

Table 13: Library objects using TLS

**Note:** If you are using `printf/scanf` (or any variants) with formatters, each individual formatter will be guarded, but the complete `printf/scanf` invocation will not be guarded.

If one of the C++ variants is used together with a DLIB library with multithread support, the compiler option `--guard_calls` must be used to make sure that function-static variables with dynamic initializers are not initialized simultaneously by several threads.

## ENABLING MULTITHREAD SUPPORT

To configure the runtime environment on the command line, for use with threaded applications, use the linker option `--threaded_lib`.



To complement the built-in multithreaded support in the library, you must also:

- Implement code for the library's system locks interface
- If file streams are used, implement code for the library's file stream locks interface or redirect the interface to the system locks interface (using the linker option `--redirect`)
- Implement code that handles thread creation, thread destruction, and TLS access methods for the library
- Modify the linker configuration file accordingly.

You can find the required declaration of functions and definitions of macros in the `DLib_Threads.h` file, which is included by `yvals.h`.

**Note:** If you are using a third-party RTOS, check their guidelines for how to enable multithread support with IAR Systems tools.

## System locks interface

This interface must be fully implemented for system locks to work:

```
typedef void *__iar_Rmtx;                /* Lock info object */

void __iar_system_Mtxinit(__iar_Rmtx *); /* Initialize a system
                                          lock */
void __iar_system_Mtxdst(__iar_Rmtx *); /* Destroy a system lock */
void __iar_system_Mtxlock(__iar_Rmtx *); /* Lock a system lock */
void __iar_system_Mtxunlock(__iar_Rmtx *); /* Unlock a system
                                           lock */
```

The lock and unlock implementation must survive nested calls.

## File streams locks interface

This interface is only needed for the Full library configuration. If file streams are used, they can either be fully implemented or they can be redirected to the system locks interface. This interface must be implemented for file streams locks to work:

```
typedef void *__iar_Rmtx;                /* Lock info object */

void __iar_file_Mtxinit(__iar_Rmtx *); /* Initialize a file lock */
void __iar_file_Mtxdst(__iar_Rmtx *); /* Destroy a file lock */
void __iar_file_Mtxlock(__iar_Rmtx *); /* Lock a file lock */
void __iar_file_Mtxunlock(__iar_Rmtx *); /* Unlock a file lock */
```

The lock and unlock implementation must survive nested calls.

## DLIB lock usage

The number of locks that the DLIB library assumes exist are:

- `_FOPEN_MAX`—the maximum number of file stream locks. These locks are only used in the Full library configuration, in other words only if both the macro symbols `_DLIB_FILE_DESCRIPTOR` and `_FILE_OP_LOCKS` are true.
- `_MAX_LOCK`—the maximum number of system locks.

Note that even if the application uses fewer locks, the DLIB library will initialize and destroy all of the locks above.

For information about the initialization and destruction code, see `xsyslock.c`.

## TLS handling

The DLIB library supports TLS memory areas for two types of threads: the *main thread* (the `main` function including the system startup and exit code) and *secondary threads*.

The main thread's TLS memory area:

- Is automatically created and initialized by your application's startup sequence
- Is automatically destructed by the application's destruct sequence
- Is located in the section `__DLIB_PERTHREAD`
- Exists also for non-threaded applications.

Each secondary thread's TLS memory area:

- Must be manually created and initialized
- Must be manually destructed
- Is located in a manually allocated memory area.

If you need the runtime library to support secondary threads, you must override the function:

```
void *__iar_dlib_perthread_access(void *symp);
```

The parameter is the address to the TLS variable to be accessed—in the main thread's TLS area—and it should return the address to the symbol in the current TLS area.

Two interfaces can be used for creating and destroying secondary threads. You can use the following interface that allocates a memory area on the heap and initializes it. At deallocation, it destroys the objects in the area and then frees the memory.

```
void *__iar_dlib_perthread_allocate(void);
void __iar_dlib_perthread_deallocate(void *);
```

Alternatively, if the application handles the TLS allocation, you can use this interface for initializing and destroying the objects in the memory area:

```
void __iar_dlib_perthread_initialize(void *);
void __iar_dlib_perthread_destroy(void *);
```

These macros can be helpful when you implement an interface for creating and destroying secondary threads:

Macro	Description
<code>__IAR_DLIB_PERTHREAD_SIZE</code>	The size needed for the TLS memory area.
<code>__IAR_DLIB_PERTHREAD_INIT_SIZE</code>	The initializer size for the TLS memory area. You should initialize the rest of the TLS memory area, up to <code>__IAR_DLIB_PERTHREAD_SIZE</code> to zero.
<code>__IAR_DLIB_PERTHREAD_SYMBOL_OFFSET(symbolptr)</code>	The offset to the symbol in the TLS memory area.

Table 14: Macros for implementing TLS allocation



Note that the size needed for TLS variables depends on which DLIB resources your application uses.

This is an example of how you can handle threads:

```
#include <yvals.h>

/* A thread's TLS pointer */
void _DLIB_TLS_MEMORY *TLSp;

/* Are we in a secondary thread? */
int InSecondaryThread = 0;

/* Allocate a thread-local TLS memory
   area and store a pointer to it in TLSp. */
void AllocateTLS()
{
    TLSp = __iar_dlib_perthread_allocate();
}

/* Deallocate the thread-local TLS memory area. */
void DeallocateTLS()
{
    __iar_dlib_perthread_deallocate(TLSp);
}

/* Access an object in the
   thread-local TLS memory area. */
void _DLIB_TLS_MEMORY *__iar_dlib_perthread_access(
    void _DLIB_TLS_MEMORY *sympb)
{
    char _DLIB_TLS_MEMORY *p = 0;
    if (InSecondaryThread)
        p = (char _DLIB_TLS_MEMORY *) TLSp;
    else
        p = (char _DLIB_TLS_MEMORY *)
            __segment_begin("__DLIB_PERTHREAD");

    p += __IAR_DLIB_PERTHREAD_SYMBOL_OFFSET(sympb);
    return (void _DLIB_TLS_MEMORY *) p;
}
```

The `TLSp` variable is unique for each thread, and must be exchanged by the RTOS or manually whenever a thread switch occurs.

## TLS IN THE LINKER CONFIGURATION FILE

Normally, the linker automatically chooses how to initialize static data. If threads are used, the main thread's TLS memory area must be initialized by plain copying because the initializers are used for each secondary thread's TLS memory area as well. This is controlled by the following statement in your linker configuration file:

```
initialize by copy with packing = none {section __DLIB_PERTHREAD };
```

---

## Checking module consistency

This section introduces the concept of runtime model attributes, a mechanism used by the tools provided by IAR Systems to ensure that modules that are linked into an application are compatible, in other words, are built using compatible settings. The tools use a set of predefined runtime model attributes. In addition to these, you can define your own that you can use to ensure that incompatible modules are not used together.

**Note:** In addition to the predefined attributes, compatibility is also checked against the AEABI runtime attributes. These attributes deal mainly with object code compatibility, etc. They reflect compilation settings and are not user-configurable.

### RUNTIME MODEL ATTRIBUTES

A runtime attribute is a pair constituted of a named key and its corresponding value. In general, two modules can only be linked together if they have the same value for each key that they both define.

There is one exception: if the value of an attribute is \*, then that attribute matches any value. The reason for this is that you can specify this in a module to show that you have considered a consistency property, and this ensures that the module does not rely on that property.

**Note:** For IAR predefined runtime model attributes, the linker checks them in several ways.

### Example

In this table, the object files could (but do not have to) define the two runtime attributes `color` and `taste`:

Object file	Color	Taste
file1	blue	not defined
file2	red	not defined

*Table 15: Example of runtime model attributes*

Object file	Color	Taste
file3	red	*
file4	red	spicy
file5	red	lean

Table 15: Example of runtime model attributes (Continued)

In this case, `file1` cannot be linked with any of the other files, since the runtime attribute `color` does not match. Also, `file4` and `file5` cannot be linked together, because the `taste` runtime attribute does not match.

On the other hand, `file2` and `file3` can be linked with each other, and with either `file4` or `file5`, but not with both.

## USING RUNTIME MODEL ATTRIBUTES

To ensure module consistency with other object files, use the `#pragma rtmodel` directive to specify runtime model attributes in your C/C++ source code. For example, if you have a UART that can run in two modes, you can specify a runtime model attribute, for example `uart`. For each mode, specify a value, for example `mode1` and `mode2`. Declare this in each module that assumes that the UART is in a particular mode. This is how it could look like in one of the modules:

```
#pragma rtmodel="uart", "mode1"
```

Alternatively, you can also use the `rtmodel` assembler directive to specify runtime model attributes in your assembler source code. For example:

```
rtmodel "uart", "mode1"
```

Note that key names that start with two underscores are reserved by the compiler. For more information about the syntax, see *rtmodel*, page 349 and the *IAR Assembler User Guide for ARM*, respectively.

At link time, the IAR ILINK Linker checks module consistency by ensuring that modules with conflicting runtime attributes will not be used together. If conflicts are detected, an error is issued.



# Assembler language interface

- Mixing C and assembler modules
- Calling assembler routines from C
- Calling assembler routines from C++
- Calling convention
- Call frame information

---

## Mixing C and assembler

The IAR C/C++ Compiler for ARM provides several ways to access low-level resources:

- Modules written entirely in assembler
- Intrinsic functions (the C alternative)
- Inline assembler.

It might be tempting to use simple inline assembler. However, you should carefully choose which method to use.

### INTRINSIC FUNCTIONS

The compiler provides a few predefined functions that allow direct access to low-level processor operations without having to use the assembler language. These functions are known as intrinsic functions. They can be very useful in, for example, time-critical routines.

An intrinsic function looks like a normal function call, but it is really a built-in function that the compiler recognizes. The intrinsic functions compile into inline code, either as a single instruction, or as a short sequence of instructions.

For more information about the available intrinsic functions, see the chapter *Intrinsic functions*.

## MIXING C AND ASSEMBLER MODULES

It is possible to write parts of your application in assembler and mix them with your C or C++ modules.

This causes some overhead in the form of function call and return instruction sequences, and the compiler will regard some registers as scratch registers. In many cases, the overhead of the extra instructions can be removed by the optimizer.

An important advantage is that you will have a well-defined interface between what the compiler produces and what you write in assembler. When using inline assembler, you will not have any guarantees that your inline assembler lines do not interfere with the compiler generated code.

When an application is written partly in assembler language and partly in C or C++, you are faced with several questions:

- How should the assembler code be written so that it can be called from C?
- Where does the assembler code find its parameters, and how is the return value passed back to the caller?
- How should assembler code call functions written in C?
- How are global C variables accessed from code written in assembler language?
- Why does not the debugger display the call stack when assembler code is being debugged?

The first question is discussed in the section *Calling assembler routines from C*, page 150. The following two are covered in the section *Calling convention*, page 153.

The answer to the final question is that the call stack can be displayed when you run assembler code in the debugger. However, the debugger requires information about the call frame, which must be supplied as annotations in the assembler source file. For more information, see *Call frame information*, page 160.

The recommended method for mixing C or C++ and assembler modules is described in *Calling assembler routines from C*, page 150, and *Calling assembler routines from C++*, page 152, respectively.

## INLINE ASSEMBLER

Inline assembler can be used for inserting assembler instructions directly into a C or C++ function. Typically, this can be useful if you need to:

- Access hardware resources that are not accessible in C (in other words, when there is no definition for an SFR or there is no suitable intrinsic function available).
- Manually write a time-critical sequence of code that if written in C will not have the right timing.

- Manually write a speed-critical sequence of code that if written in C will be too slow.

An inline assembler statement is similar to a C function in that it can take input arguments (input operands), have return values (output operands), and read or write to C symbols (via the operands). An inline assembler statement can also declare *clobbered resources* (that is, values in registers and memory that have been overwritten).

### Limitations

Most things you can do in normal assembler language are also possible with inline assembler, with the following differences:

- Alignment cannot be controlled; this means, for example, that `DC32` directives might be misaligned.
- The only accepted register synonyms are `SP` (for `R13`), `LR` (for `R14`), and `PC` (for `R15`).
- In general, assembler directives will cause errors or have no meaning. However, data definition directives will work as expected.
- Resources used (registers, memory, etc) that are also used by the C compiler must be declared as operands or clobbered resources.
- If you do not want to risk that the inline assembler statement to be optimized away by the compiler, you must declare it `volatile`.
- Accessing a C symbol or using a constant expression requires the use of operands.
- Dependencies between the expressions for the operands might result in an error.
- The pseudo-instruction `LDR Rd, =expr` is not available from inline assembler.

### Risks with inline assembler

Without operands and clobbered resources, inline assembler statements have no interface with the surrounding C source code. This makes the inline assembler code fragile, and might also become a maintenance problem if you update the compiler in the future. There are also several limitations to using inline assembler without operands and clobbered resources:

- The compiler's various optimizations will disregard any effects of the inline statements, which will not be optimized at all.
- The inline assembler statement will be `volatile` and *clobbered memory* is not implied. This means that the compiler will not remove the assembler statement. It will simply be inserted at the given location in the program flow. The consequences or side-effects that the insertion might have on the surrounding code are not taken into consideration. If, for example, registers or memory locations are altered, they

might have to be restored within the sequence of inline assembler instructions for the rest of the code to work properly.



The following example (for ARM mode) demonstrates the risks of using the `asm` keyword without operands and clobbers:

```
int Add(int term1, int term2)
{
    asm("adds r0,r0,r1");
    return term1;
}
```

In this example:

- The function `Add` assumes that values are passed and returned in registers in a way that they might not always be, for example if the function is inlined.
- The `s` in the `adds` instruction implies that the condition flags are updated, which should be specified using the `cc` clobber operand. Otherwise, the compiler will assume that the condition flags are not modified.

Inline assembler without using operands or clobbered resources is therefore often best avoided.

## Reference information for inline assembler

The `asm` and `__asm` keywords both insert inline assembler instructions. However, when you compile C source code, the `asm` keyword is not available when the option `--strict` is used. The `__asm` keyword is always available.

### Syntax

The syntax of an inline assembler statement is (similar to the one used by GNU `gcc`):

```
asm [volatile]( string [assembler-interface])
```

*string* can contain one or more valid assembler instructions or data definition assembler directives, separated by `\n`.

For example:

```
asm("label:nop\n"
    "b label");
```

Note that you can define and use local labels in inline assembler instructions.

*assembler-interface* is:

```
: comma-separated list of output operands    /* optional */
: comma-separated list of input operands     /* optional */
: comma-separated list of clobbered resources /* optional */
```



## Operands

An inline assembler statement can have one input and one output comma-separated list of operands. Each operand consists of an optional symbolic name in brackets, a quoted constraint, followed by a C expression in parentheses.

## Syntax of operands

```
[ [ symbolic-name ] ] " [modifiers] constraint" (expr)
```

For example:

```
int Add(int term1, int term2)
{
    int sum;

    asm("add %0,%1,%2"
        : "=r"(sum)
        : "r" (term1), "r" (term2));

    return sum;
}
```

In this example, the assembler instruction uses one output operand, `sum`, two input operands, `term1` and `term2`, and no clobbered resources.

It is possible to omit any list by leaving it empty. For example:

```
int matrix[M][N];

void MatrixPreloadRow(int row)
{
    asm volatile ("pld [%0]" : : "r" (&matrix[row][0]));
}
```

## Operand constraints

Constraint	Description
<code>r</code>	Uses a general purpose register for the expression: R0-R12, R14 (for ARM and Thumb2) R0-R7 (for Thumb1)
<code>l</code>	R0-R7 (only valid for Thumb1)
<code>Rp</code>	Uses a pair of general purpose registers, for example R0, R1
<code>i</code>	An immediate integer operand with a constant value. Symbolic constants are allowed.
<code>j</code>	A 16-bit constant suitable for a MOVW instruction (valid for ARM and Thumb2).
<code>n</code>	An immediate operand, alias for <code>i</code> .

Table 16: Inline assembler operand constraints

Constraint	Description
I	An immediate constant valid for a data processing instruction (for ARM and Thumb2), or a constant in the range 0 to 255 (for Thumb1).
J	An immediate constant in the range -4095 to 4095 (for ARM and Thumb2), or a constant in the range -255 to -1 (for Thumb1).
K	An immediate constant that satisfies the I constraint if inverted (for ARM and Thumb2), or a constant that satisfies the I constraint multiplied by any power of 2 (for Thumb1).
L	An immediate constant that satisfies the I constraint if negated (for ARM and Thumb2), or a constant in the range -7 to 7 (for Thumb1).
M	An immediate constant that is a multiple of 4 in the range 0 to 1020 (only valid for Thumb1).
N	An immediate constant in the range 0 to 31 (only valid for Thumb1).
O	An immediate constant that is a multiple of 4 in the range -508 to 508 (only valid for Thumb1).
t	An S register.
w	A D register.
q	A Q register.
Dv	A 32-bit floating-point immediate constant for the <code>VMOV.F32</code> instruction.
Dy	A 64-bit floating-point immediate constant for the <code>VMOV.F64</code> instruction.
v2S ... v4Q	A vector of 2, 3, or 4 consecutive S, D, or Q registers. For example, v4Q is a vector of four Q registers. The vectors do not overlap, so the available v4Q register vectors are Q0-Q3, Q4-Q7, Q8-Q11, and Q12-Q15.

Table 16: Inline assembler operand constraints (Continued)

### Constraint modifiers

Constraint modifiers can be used together with a constraint to modify its meaning. This table lists the supported constraint modifiers:

Modifier	Description
=	Write-only operand
+	Read-write operand
&	Early clobber output operand which is written to before the instruction has processed all the input operands.

Table 17: Supported constraint modifiers

## Referring to operands

Assembler instructions refer to operands by prefixing their order number with `%`. The first operand has order number 0 and is referred to by `%0`.

If the operand has a symbolic name, you can refer to it using the syntax `[%operand.name]`. Symbolic operand names are in a separate namespace from C/C++ code and can be the same as a C/C++ variable names. Each operand name must however be unique in each assembler statement. For example:

```
int Add(int term1, int term2)
{
    int sum;

    asm("add %[Rd], %[Rn], %[Rm] "
        : [Rd] "=r" (sum)
        : [Rn] "r" (term1), [Rm] "r" (term2));

    return sum;
}
```

## Operand modifiers

An operand modifier is a single letter between the `%` and the operand number, which is used for transforming the operand.

In the example below, the modifiers `L` and `H` are used for accessing the least and most significant 16 bits, respectively, of an immediate operand:

```
int Mov32()
{
    int a;
    asm("movw %0,%L1 \n"
        "movt %0,%H1 \n" : "=r" (a) : "i" (0x12345678UL));
    return a;
}
```

Some operand modifiers can be combined, in which case each letter will transform the result from the previous modifier. This table describes the transformation performed by each valid modifier:

Modifier	Description
L	The lowest-numbered register of a register pair, or the low 16 bits of an immediate constant.
H	The highest-numbered register of a register pair, or the high 16 bits of an immediate constant.
c	For an immediate operand, an integer or symbol address without a preceding <code>#</code> sign. Cannot be transformed by additional operand modifiers.

Table 18: Operand modifiers and transformations

Modifier	Description
B	For an immediate operand, the bitwise inverse of integer or symbol without a preceding # sign. Cannot be transformed by additional operand modifiers.
Q	The least significant register of a register pair.
R	The most significant register of a register pair.
M	For a register or a register pair, the register list suitable for <code>ldm</code> or <code>stm</code> . Cannot be transformed by additional operand modifiers.
a	Transforms a register <code>Rn</code> into a memory operand <code>[Rn, #0]</code> suitable for <code>pld</code> .
b	The low <code>S</code> register part of a <code>D</code> register.
p	The high <code>S</code> register part of a <code>D</code> register.
e	The low <code>D</code> register part of a <code>Q</code> register, or the low register in a vector of Neon registers.
f	The high <code>D</code> register part of a <code>Q</code> register, or the high register in a vector of Neon registers.
h	For a (vector of) <code>D</code> or <code>Q</code> registers, the corresponding list of <code>D</code> registers within curly braces. For example, <code>Q0</code> becomes <code>{D0, D1}</code> . Cannot be transformed by additional operand modifiers.
Y	<code>S</code> register as indexed <code>D</code> register, for example <code>S7</code> becomes <code>D3[1]</code> . Cannot be transformed by additional operand modifiers.

Table 18: Operand modifiers and transformations

Input operands	<p>Input operands cannot have any modifiers, but they can have any valid C expression as long as the type of the expression fits the register.</p> <p>The C expression will be evaluated just before any of the assembler instructions in the inline assembler statement and assigned to the constraint, for example a register.</p>
Output operands	<p>Output operands must have <code>=</code> as a modifier and the C expression must be an l-value and specify a writable location. For example, <code>=r</code> for a write-only general purpose register. The constraint will be assigned to the evaluated C expression (as an l-value) immediately after the last assembler instruction in the inline assembler statement. Input operands are assumed to be consumed before output is produced and the compiler may use the same register for an input and output operand. To prohibit this, prefix the output constraint with <code>&amp;</code> to make it an early clobber resource, for example <code>=&amp;r</code>. This will ensure that the output operand will be allocated in a different register than the input operands.</p>
Input/output operands	<p>An operand that should be used both for input and output must be listed as an output operand and have the <code>+</code> modifier. The C expression must be an l-value and specify a</p>

writable location. The location will be read immediately before any assembler instructions and it will be written to right after the last assembler instruction.

This is an example of using a read-write operand:

```
int Double(int value)
{
    asm("add %0,%0,%0" : "+r"(value));

    return value;
}
```

In the example above, the input value for `value` will be placed in a general purpose register. After the assembler statement, the result from the `ADD` instruction will be placed in the same register.

### Clobbered resources

An inline assembler statement can have a list of clobbered resources.

```
"resource1", "resource2", ...
```

Specify clobbered resources to inform the compiler about which resources the inline assembler statement destroys. Any value that resides in a clobbered resource and that is needed after the inline assembler statement will be reloaded.

Clobbered resources will not be used as input or output operands.

This is an example of how to use clobbered resources:

```
int Add(int term1, int term2)
{
    int sum;

    asm("adds %0,%1,%2"
        : "=r"(sum)
        : "r"(term1), "r"(term2)
        : "cc");

    return sum;
}
```

In this example the condition codes will be modified by the `ADDS` instruction. Therefore, `"cc"` must be listed in the clobber list.

This table lists valid clobbered resources:

Clobber	Description
R0-R12, R14 for ARM mode and Thumb2	General purpose registers
R0-R7, R12, R14 for Thumb1	

Table 19: List of valid clobbers

Clobber	Description
S0-S31, D0-D31, Q0-Q15	Floating-point registers
cc	The condition flags (N, Z, V, and C)
memory	To be used if the instructions modify any memory. This will avoid keeping memory values cached in registers across the inline assembler statement.

Table 19: List of valid clobbers (Continued)

## AN EXAMPLE OF HOW TO USE CLOBBERED MEMORY

```
int StoreExclusive(unsigned long * location, unsigned long value)
{
    int failed;

    asm("strex %0,%2, [%1]"
        : "=&r"(failed)
        : "r"(location), "r"(value)
        : "memory");

    /* Note: 'strex' requires ARMv6 (ARM) or ARMv6T2 (THUMB) */

    return failed;
}
```

## Calling assembler routines from C

An assembler routine that will be called from C must:

- Conform to the calling convention
- Have a PUBLIC entry-point label
- Be declared as external before any call, to allow type checking and optional promotion of parameters, as in these examples:

```
extern int foo(void);
or
extern int foo(int i, int j);
```

One way of fulfilling these requirements is to create skeleton code in C, compile it, and study the assembler list file.

## CREATING SKELETON CODE

The recommended way to create an assembler language routine with the correct interface is to start with an assembler language source file created by the C compiler. Note that you must create skeleton code for each function prototype.

The following example shows how to create skeleton code to which you can easily add the functional body of the routine. The skeleton source code only needs to declare the variables required and perform simple accesses to them. In this example, the assembler routine takes an `int` and a `char`, and then returns an `int`:

```
extern int gInt;
extern char gChar;

int Func(int arg1, char arg2)
{
    int locInt = arg1;
    gInt = arg1;
    gChar = arg2;
    return locInt;
}

int main()
{
    int locInt = gInt;
    gInt = Func(locInt, gChar);
    return 0;
}
```

**Note:** In this example we use a low optimization level when compiling the code to show local and global variable access. If a higher level of optimization is used, the required references to local variables could be removed during the optimization. The actual function declaration is not changed by the optimization level.

## COMPILING THE SKELETON CODE



In the IDE, specify list options on file level. Select the file in the workspace window. Then choose **Project>Options**. In the **C/C++ Compiler** category, select **Override inherited settings**. On the **List** page, deselect **Output list file**, and instead select the **Output assembler file** option and its suboption **Include source**. Also, be sure to specify a low level of optimization.



Use these options to compile the skeleton code:

```
iccarm skeleton.c -lA . -On -e
```

The `-lA` option creates an assembler language output file including C or C++ source lines as assembler comments. The `.` (period) specifies that the assembler file should be

named in the same way as the C or C++ module (`skeleton`), but with the filename extension `s`. The `-On` option means that no optimization will be used and `-e` enables language extensions. In addition, make sure to use relevant compiler options, usually the same as you use for other C or C++ source files in your project.

The result is the assembler source output file `skeleton.s`.

**Note:** The `-lA` option creates a list file containing call frame information (CFI) directives, which can be useful if you intend to study these directives and how they are used. If you only want to study the calling convention, you can exclude the CFI directives from the list file.



In the IDE, choose **Project>Options>C/C++ Compiler>List** and deselect the suboption **Include call frame information**.



On the command line, use the option `-lB` instead of `-lA`. Note that CFI information must be included in the source code to make the C-SPY Call Stack window work.

### The output file

The output file contains the following important information:

- The calling convention
- The return values
- The global variables
- The function parameters
- How to create space on the stack (auto variables)
- Call frame information (CFI).

The CFI directives describe the call frame information needed by the Call Stack window in the debugger. For more information, see *Call frame information*, page 160.

---

## Calling assembler routines from C++

The C calling convention does not apply to C++ functions. Most importantly, a function name is not sufficient to identify a C++ function. The scope and the type of the function are also required to guarantee type-safe linkage, and to resolve overloading.

Another difference is that non-static member functions get an extra, hidden argument, the `this` pointer.



However, when using C linkage, the calling convention conforms to the C calling convention. An assembler routine can therefore be called from C++ when declared in this manner:

```
extern "C"
{
    int MyRoutine(int);
}
```

The following example shows how to achieve the equivalent to a non-static member function, which means that the implicit `this` pointer must be made explicit. It is also possible to “wrap” the call to the assembler routine in a member function. Use an inline member function to remove the overhead of the extra call—this assumes that function inlining is enabled:

```
class MyClass;

extern "C"
{
    void DoIt(MyClass *ptr, int arg);
}

class MyClass
{
public:
    inline void DoIt(int arg)
    {
        ::DoIt(this, arg);
    }
};
```

---

## Calling convention

A calling convention is the way a function in a program calls another function. The compiler handles this automatically, but, if a function is written in assembler language, you must know where and how its parameters can be found, how to return to the program location from where it was called, and how to return the resulting value.

It is also important to know which registers an assembler-level routine must preserve. If the program preserves too many registers, the program might be ineffective. If it preserves too few registers, the result would be an incorrect program.

This section describes the calling convention used by the compiler. These items are examined:

- Function declarations
- C and C++ linkage

- Preserved versus scratch registers
- Function entrance
- Function exit
- Return address handling.

At the end of the section, some examples are shown to describe the calling convention in practice.

The calling convention used by the compiler adheres to the Procedure Call Standard for the ARM architecture, AAPCS, a part of AEABI; see *AEABI compliance*, page 196. AAPCS is not fully described here. For example, the use of floating-point coprocessor registers when using the VFP calling convention is not covered.

## FUNCTION DECLARATIONS

In C, a function must be declared in order for the compiler to know how to call it. A declaration could look as follows:

```
int MyFunction(int first, char * second);
```

This means that the function takes two parameters: an integer and a pointer to a character. The function returns a value, an integer.

In the general case, this is the only knowledge that the compiler has about a function. Therefore, it must be able to deduce the calling convention from this information.

## USING C LINKAGE IN C++ SOURCE CODE

In C++, a function can have either C or C++ linkage. To call assembler routines from C++, it is easiest if you make the C++ function have C linkage.

This is an example of a declaration of a function with C linkage:

```
extern "C"  
{  
    int F(int);  
}
```

It is often practical to share header files between C and C++. This is an example of a declaration that declares a function with C linkage in both C and C++:

```
#ifndef __cplusplus
extern "C"
{
#endif

int F(int);

#ifdef __cplusplus
}
#endif
```

## PRESERVED VERSUS SCRATCH REGISTERS

The general ARM CPU registers are divided into three separate sets, which are described in this section.

### Scratch registers

Any function is permitted to destroy the contents of a scratch register. If a function needs the register value after a call to another function, it must store it during the call, for example on the stack.

Any of the registers R0 to R3, and R12, can be used as a scratch register by the function. Note that R12 is a scratch register also when calling between assembler functions only because of automatically inserted instructions for veneers.

### Preserved registers

Preserved registers, on the other hand, are preserved across function calls. The called function can use the register for other purposes, but must save the value before using the register and restore it at the exit of the function.

The registers R4 through to R11 are preserved registers. They are preserved by the called function.

### Special registers

For some registers, you must consider certain prerequisites:

- The stack pointer register, R13/SP, must at all times point to or below the last element on the stack. In the eventuality of an interrupt, everything below the point the stack pointer points to, can be destroyed. At function entry and exit, the stack pointer must be 8-byte aligned. In the function, the stack pointer must always be word aligned. At exit, SP must have the same value as it had at the entry.

- The register R15/PC is dedicated for the Program Counter.
- The link register, R14/LR, holds the return address at the entrance of the function.

## FUNCTION ENTRANCE

Parameters can be passed to a function using one of these basic methods:

- In registers
- On the stack

It is much more efficient to use registers than to take a detour via memory, so the calling convention is designed to use registers as much as possible. Only a limited number of registers can be used for passing parameters; when no more registers are available, the remaining parameters are passed on the stack. These exceptions to the rules apply:

- Interrupt functions cannot take any parameters, except software interrupt functions that accept parameters and have return values
- Software interrupt functions cannot use the stack in the same way as ordinary functions. When an SVC instruction is executed, the processor switches to supervisor mode where the supervisor stack is used. Arguments can therefore not be passed on the stack if your application is not running in supervisor mode previous to the interrupt.

## Hidden parameters

In addition to the parameters visible in a function declaration and definition, there can be hidden parameters:

- If the function returns a structure larger than 32 bits, the memory location where the structure is to be stored is passed as an extra parameter. Notice that it is always treated as the *first parameter*.
- If the function is a non-static C++ member function, then the `this` pointer is passed as the first parameter (but placed after the return structure pointer, if there is one). For more information, see *Calling assembler routines from C*, page 150.

## Register parameters

The registers available for passing parameters are:

Parameters	Passed in registers
Scalar and floating-point values no larger than 32 bits, and single-precision (32-bits) floating-point values	Passed using the first free register: R0–R3

Table 20: Registers used for passing parameters

Parameters	Passed in registers
long long and double-precision (64-bit) values	Passed in first available register pair: R0 : R1, or R2 : R3

Table 20: Registers used for passing parameters


The assignment of registers to parameters is a straightforward process. Traversing the parameters from left to right, the first parameter is assigned to the available register or registers. Should there be no more available registers, the parameter is passed on the stack in reverse order.

When functions that have parameters smaller than 32 bits are called, the values are sign or zero extended to ensure that the unused bits have consistent values. Whether the values will be sign or zero extended depends on their type—*signed* or *unsigned*.

### Stack parameters and layout

Stack parameters are stored in memory, starting at the location pointed to by the stack pointer. Below the stack pointer (towards low memory) there is free space that the called function can use. The first stack parameter is stored at the location pointed to by the stack pointer. The next one is stored at the next location on the stack that is divisible by four, etc. It is the responsibility of the caller to clean the stack after the called function has returned.

This figure illustrates how parameters are stored on the stack:

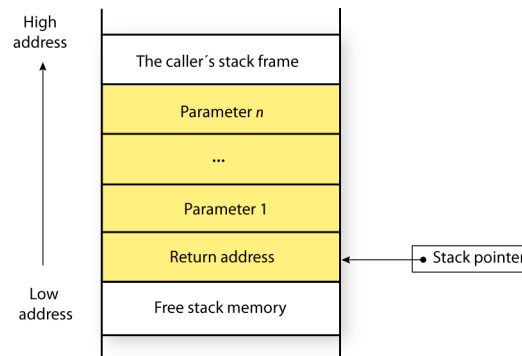

### FUNCTION EXIT

A function can return a value to the function or program that called it, or it can have the return type `void`.

The return value of a function, if any, can be scalar (such as integers and pointers), floating-point, or a structure.

## Registers used for returning values

The registers available for returning values are R0 and R0:R1.

Return values	Passed in registers
Scalar and structure return values no larger than 32 bits, and single-precision (32-bit) floating-point return values	R0
The memory address of a structure return value larger than 32 bits	R0
long long and double-precision (64-bit) return values	R0:R1

*Table 21: Registers used for returning values*

If the returned value is smaller than 32 bits, the value is sign- or zero-extended to 32 bits.

## Stack layout at function exit

It is the responsibility of the caller to clean the stack after the called function has returned.

## Return address handling

A function written in assembler language should, when finished, return to the caller, by jumping to the address pointed to by the register LR.

At function entry, non-scratch registers and the LR register can be pushed with one instruction. At function exit, all these registers can be popped with one instruction. The return address can be popped directly to PC.

The following example shows what this can look like:

```

name      call
section  .text:CODE
extern   func

        push    {r4-r6,lr}    ; Preserve stack alignment 8
        bl      func

        ; Do something here.

        pop     {r4-r6,pc}    ; return

end

```

## EXAMPLES

The following section shows a series of declaration examples and the corresponding calling conventions. The complexity of the examples increases toward the end.

### Example 1

Assume this function declaration:

```
int add1(int);
```

This function takes one parameter in the register R0, and the return value is passed back to its caller in the register R0.

This assembler routine is compatible with the declaration; it will return a value that is one number higher than the value of its parameter:

```
name    return
section .text:CODE
add     r0, r0, #1
bx      lr
end
```

### Example 2

This example shows how structures are passed on the stack. Assume these declarations:

```
struct MyStruct
{
    short a;
    short b;
    short c;
    short d;
    short e;
};
```

```
int MyFunction(struct MyStruct x, int y);
```

The values of the structure members a, b, c, and d are passed in registers R0–R3. The last structure member e and the integer parameter y are passed on the stack. The calling function must reserve eight bytes on the top of the stack and copy the contents of the two stack parameters to that location. The return value is passed back to its caller in the register R0.

### Example 3

The function below will return a structure of type `struct MyStruct`.

```

struct MyStruct
{
    int mA[20];
};

struct MyStruct MyFunction(int x);

```

It is the responsibility of the calling function to allocate a memory location for the return value and pass a pointer to it as a hidden first parameter. The pointer to the location where the return value should be stored is passed in `R0`. The parameter `x` is passed in `R1`.

Assume that the function instead was declared to return a pointer to the structure:

```

struct MyStruct *MyFunction(int x);

```

In this case, the return value is a scalar, so there is no hidden parameter. The parameter `x` is passed in `R0`, and the return value is returned in `R0`.

---

## Call frame information

When you debug an application using C-SPY, you can view the *call stack*, that is, the chain of functions that called the current function. To make this possible, the compiler supplies debug information that describes the layout of the call frame, in particular information about where the return address is stored.

If you want the call stack to be available when debugging a routine written in assembler language, you must supply equivalent debug information in your assembler source using the assembler directive `CFI`. This directive is described in detail in the *IAR Assembler User Guide for ARM*.

### CFI DIRECTIVES

The `CFI` directives provide C-SPY with information about the state of the calling function(s). Most important of this is the return address, and the value of the stack pointer at the entry of the function or assembler routine. Given this information, C-SPY can reconstruct the state for the calling function, and thereby unwind the stack.

A full description about the calling convention might require extensive call frame information. In many cases, a more limited approach will suffice.

When describing the call frame information, the following three components must be present:

- A *names block* describing the available resources to be tracked



- A *common block* corresponding to the calling convention
- A *data block* describing the changes that are performed on the call frame. This typically includes information about when the stack pointer is changed, and when permanent registers are stored or restored on the stack.

Resource	Description
CFA R13	The call frames of the stack
R0–R12	Processor general-purpose 32-bit registers
R13	Stack pointer, SP
R14	Link register, LR
D0–D31	Vector Floating Point (VFP) 64-bit coprocessor register
CPSR	Current program status register
SPSR	Saved program status register

Table 22: Call frame information resources defined in a names block

## CREATING ASSEMBLER SOURCE WITH CFI SUPPORT

The recommended way to create an assembler language routine that handles call frame information correctly is to start with an assembler language source file created by the compiler.

- 1 Start with suitable C source code, for example:

```
int F(int);
int cfiExample(int i)
{
    return i + F(i);
}
```

- 2 Compile the C source code, and make sure to create a list file that contains call frame information—the CFI directives.



On the command line, use the option `-IA`.



In the IDE, choose **Project>Options>C/C++ Compiler>List** and make sure the suboption **Include call frame information** is selected.

For the source code in this example, the list file looks like this:

```

NAME Cfi

RTMODEL "__SystemLibrary", "DLib"

EXTERN F

PUBLIC cfiExample

CFI Names cfiNames0
CFI StackFrame CFA R13 DATA
CFI Resource R0:32, R1:32, R2:32, R3:32, R4:32, R5:32,
R6:32, R7:32
CFI Resource R8:32, R9:32, R10:32, R11:32, R12:32,
R13:32, R14:32
CFI EndNames cfiNames0

CFI Common cfiCommon0 Using cfiNames0
CFI CodeAlign 4
CFI DataAlign 4
CFI ReturnAddress R14 CODE
CFI CFA R13+0
CFI R0 Undefined
CFI R1 Undefined
CFI R2 Undefined
CFI R3 Undefined
CFI R4 SameValue
CFI R5 SameValue
CFI R6 SameValue
CFI R7 SameValue
CFI R8 SameValue
CFI R9 SameValue
CFI R10 SameValue
CFI R11 SameValue
CFI R12 Undefined
CFI R14 SameValue
CFI EndCommon cfiCommon0

SECTION `.text`:CODE:NOROOT(2)
CFI Block cfiBlock0 Using cfiCommon0
CFI Function cfiExample
ARM
cfiExample:
    PUSH    {R4,LR}
    CFI R14 Frame(CFA, -4)
    CFI R4 Frame(CFA, -8)

```

```
CFI CFA R13+8
MOVS    R4,R0
MOVS    R0,R4
BL      F
ADDS    R0,R0,R4
POP     {R4,PC}    ;; return
CFI EndBlock cfiBlock0

END
```

**Note:** The header file `Common.i` contains the macros `CFI_NAMES_BLOCK`, `CFI_COMMON_ARM`, and `CFI_COMMON_Thumb`, which declare a typical names block and a typical common block. These two macros declare several resources, both concrete and virtual.



# Using C

- C language overview
- Extensions overview
- IAR C language extensions

---

## C language overview

The IAR C/C++ Compiler for ARM supports the ISO/IEC 9899:1999 standard (including up to technical corrigendum No.3), also known as C99. In this guide, this standard is referred to as *Standard C* and is the default standard used in the compiler. This standard is stricter than C89.

In addition, the compiler also supports the ISO 9899:1990 standard (including all technical corrigenda and addenda), also known as C94, C90, C89, and ANSI C. In this guide, this standard is referred to as *C89*. Use the `--c89` compiler option to enable this standard.

The C99 standard is derived from C89, but adds features like these:

- The `inline` keyword advises the compiler that the function defined immediately after the keyword should be inlined
- Declarations and statements can be mixed within the same scope
- A declaration in the initialization expression of a `for` loop
- The `bool` data type
- The `long long` data type
- The `complex` floating-point type
- C++ style comments
- Compound literals
- Incomplete arrays at the end of structs
- Hexadecimal floating-point constants
- Designated initializers in structures and arrays
- The preprocessor operator `_Pragma()`
- Variadic macros, which are the preprocessor macro equivalents of `printf` style functions
- VLA (variable length arrays) must be explicitly enabled with the compiler option `--vla`

- Inline assembler using the `asm` or the `__asm` keyword, see .

**Note:** Even though it is a C99 feature, the IAR C/C++ Compiler for ARM does not support UCNs (universal character names).

---

## Extensions overview

The compiler offers the features of Standard C and a wide set of extensions, ranging from features specifically tailored for efficient programming in the embedded industry to the relaxation of some minor standards issues.

This is an overview of the available extensions:

- IAR C language extensions

For information about available language extensions, see *IAR C language extensions*, page 167. For more information about the extended keywords, see the chapter *Extended keywords*. For information about C++, the two levels of support for the language, and C++ language extensions; see the chapter *Using C++*.

- Pragma directives

The `#pragma` directive is defined by Standard C and is a mechanism for using vendor-specific extensions in a controlled way to make sure that the source code is still portable.

The compiler provides a set of predefined pragma directives, which can be used for controlling the behavior of the compiler, for example how it allocates memory, whether it allows extended keywords, and whether it outputs warning messages. Most pragma directives are preprocessed, which means that macros are substituted in a pragma directive. The pragma directives are always enabled in the compiler. For several of them there is also a corresponding C/C++ language extension. For information about available pragma directives, see the chapter *Pragma directives*.

- Preprocessor extensions

The preprocessor of the compiler adheres to Standard C. The compiler also makes several preprocessor-related extensions available to you. For more information, see the chapter *The preprocessor*.

- Intrinsic functions

The intrinsic functions provide direct access to low-level processor operations and can be very useful in, for example, time-critical routines. The intrinsic functions compile into inline code, either as a single instruction or as a short sequence of instructions. For more information about using intrinsic functions, see *Mixing C and assembler*, page 141. For information about available functions, see the chapter *Intrinsic functions*.

- Library functions

The IAR DLIB Library provides the C and C++ library definitions that apply to embedded systems. For more information, see *IAR DLIB Library*, page 401.

**Note:** Any use of these extensions, except for the pragma directives, makes your source code inconsistent with Standard C.

## ENABLING LANGUAGE EXTENSIONS

You can choose different levels of language conformance by means of project options:

Command line	IDE*	Description
<code>--strict</code>	<b>Strict</b>	All IAR C language extensions are disabled; errors are issued for anything that is not part of Standard C.
None	<b>Standard</b>	All <i>extensions to Standard C</i> are enabled, but no <i>extensions for embedded systems programming</i> . For information about extensions, see <i>IAR C language extensions</i> , page 167.
<code>-e</code>	<b>Standard with IAR extensions</b>	All <i>IAR C language extensions</i> are enabled.

Table 23: Language extensions

\* In the IDE, choose **Project>Options>C/C++ Compiler>Language>Language conformance** and select the appropriate option. Note that language extensions are enabled by default.

## IAR C language extensions

The compiler provides a wide set of C language extensions. To help you to find the extensions required by your application, they are grouped like this in this section:

- *Extensions for embedded systems programming*—extensions specifically tailored for efficient embedded programming for the specific core you are using, typically to meet memory restrictions
- *Relaxations to Standard C*—that is, the relaxation of some minor Standard C issues and also some useful but minor syntax extensions, see *Relaxations to Standard C*, page 170.

## EXTENSIONS FOR EMBEDDED SYSTEMS PROGRAMMING

The following language extensions are available both in the C and the C++ programming languages and they are well suited for embedded systems programming:

- Type attributes and object attributes
 

For information about the related concepts, the general syntax rules, and for reference information, see the chapter *Extended keywords*.
- Placement at an absolute address or in a named section
 

The @ operator or the directive #pragma location can be used for placing global and static variables at absolute addresses, or placing a variable or function in a named section. For more information about using these features, see *Controlling data and function placement in memory*, page 204, and *location*, page 344.
- Alignment control
 

Each data type has its own alignment; for more information, see *Alignment*, page 305. If you want to change the alignment, the \_\_packed data type attribute, the #pragma pack, and the #pragma data\_alignment directives are available. If you want to check the alignment of an object, use the \_\_ALIGNOF\_\_() operator. The \_\_ALIGNOF\_\_ operator is used for accessing the alignment of an object. It takes one of two forms:

  - \_\_ALIGNOF\_\_(type)
  - \_\_ALIGNOF\_\_(expression)

In the second form, the expression is not evaluated.
- Anonymous structs and unions
 

C++ includes a feature called anonymous unions. The compiler allows a similar feature for both structs and unions in the C programming language. For more information, see *Anonymous structs and unions*, page 203.
- Bitfields and non-standard types
 

In Standard C, a bitfield must be of the type int or unsigned int. Using IAR C language extensions, any integer type or enumeration can be used. The advantage is that the struct will sometimes be smaller. For more information, see *Bitfields*, page 308.
- static\_assert()
 

The construction static\_assert(const-expression, "message"); can be used in C/C++. The construction will be evaluated at compile time and if const-expression is false, a message will be issued including the message string.



- Parameters in variadic macros

Variadic macros are the preprocessor macro equivalents of `printf` style functions. The preprocessor accepts variadic macros with no arguments, which means if no parameter matches the `...` parameter, the comma is then deleted in the `" , ##__VA_ARGS__"` macro definition. According to Standard C, the `...` parameter must be matched with at least one argument.

### Dedicated section operators

The compiler supports getting the start address, end address, and size for a section with these built-in section operators:

<code>__section_begin</code>	Returns the address of the first byte of the named section or block.
<code>__section_end</code>	Returns the address of the first byte <i>after</i> the named section or block.
<code>__section_size</code>	Returns the size of the named section or block in bytes.

**Note:** The aliases `__segment_begin/__sfb`, `__segment_end/__sfe`, and `__segment_size/__sfs` can also be used.

The operators can be used on named sections or on named blocks defined in the linker configuration file.

These operators behave syntactically as if declared like:

```
void * __section_begin(char const * section)
void * __section_end(char const * section)
size_t __section_size(char const * section)
```

When you use the `@` operator or the `#pragma location` directive to place a data object or a function in a user-defined section, or when you use named blocks in the linker configuration file, the section operators can be used for getting the start and end address of the memory range where the sections or blocks were placed.

The named *section* must be a string literal and it must have been declared earlier with the `#pragma section` directive. The type of the `__section_begin` operator is a pointer to `void`. Note that you must enable language extensions to use these operators.

The operators are implemented in terms of *symbols* with dedicated names, and will appear in the linker map file under these names:

Operator	Symbol
<code>__section_begin(sec)</code>	<code>sec\$\$Base</code>
<code>__section_end(sec)</code>	<code>sec\$\$Limit</code>
<code>__section_size(sec)</code>	<code>sec\$\$Length</code>

Table 24: Section operators and their symbols

Note that the linker will not necessarily place sections with the same name consecutively when these operators are not used. Using one of these operators (or the equivalent symbols) will cause the linker to behave as if the sections were in a named block. This is to assure that the sections are placed consecutively, so that the operators can be assigned meaningful values. If this is in conflict with the section placement as specified in the linker configuration file, the linker will issue an error.

### Example

In this example, the type of the `__section_begin` operator is `void *`.

```
#pragma section="MYSECTION"
...
section_start_address = __section_begin("MYSECTION");
```

See also *section*, page 350, and *location*, page 344.

## RELAXATIONS TO STANDARD C

This section lists and briefly describes the relaxation of some Standard C issues and also some useful but minor syntax extensions:

- Arrays of incomplete types
 

An array can have an incomplete `struct`, `union`, or `enum` type as its element type. The types must be completed before the array is used (if it is), or by the end of the compilation unit (if it is not).
- Forward declaration of `enum` types
 

The extensions allow you to first declare the name of an `enum` and later resolve it by specifying the brace-enclosed list.
- Accepting missing semicolon at the end of a `struct` or `union` specifier
 

A warning—instead of an error—is issued if the semicolon at the end of a `struct` or `union` specifier is missing.
- Null and `void`

In operations on pointers, a pointer to `void` is always implicitly converted to another type if necessary, and a null pointer constant is always implicitly converted to a null

pointer of the right type if necessary. In Standard C, some operators allow this kind of behavior, while others do not allow it.

- Casting pointers to integers in static initializers

In an initializer, a pointer constant value can be cast to an integral type if the integral type is large enough to contain it. For more information about casting pointers, see *Casting*, page 314.

- Taking the address of a register variable

In Standard C, it is illegal to take the address of a variable specified as a register variable. The compiler allows this, but a warning is issued.

- `long float` means `double`

The type `long float` is accepted as a synonym for `double`.

- Repeated `typedef` declarations

Redeclarations of `typedef` that occur in the same scope are allowed, but a warning is issued.

- Mixing pointer types

Assignment and pointer difference is allowed between pointers to types that are interchangeable but not identical; for example, `unsigned char *` and `char *`. This includes pointers to integral types of the same size. A warning is issued.

Assignment of a string constant to a pointer to any kind of character is allowed, and no warning is issued.

- Non-top level `const`

Assignment of pointers is allowed in cases where the destination type has added type qualifiers that are not at the top level (for example, `int **` to `int const **`).

Comparing and taking the difference of such pointers is also allowed.

- Non-lvalue arrays

A non-lvalue array expression is converted to a pointer to the first element of the array when it is used.

- Comments at the end of preprocessor directives

This extension, which makes it legal to place text after preprocessor directives, is enabled unless the strict Standard C mode is used. The purpose of this language extension is to support compilation of legacy code; we do not recommend that you write new code in this fashion.

- An extra comma at the end of `enum` lists

Placing an extra comma is allowed at the end of an `enum` list. In strict Standard C mode, a warning is issued.

- A label preceding a }

In Standard C, a label must be followed by at least one statement. Therefore, it is illegal to place the label at the end of a block. The compiler allows this, but issues a warning.

Note that this also applies to the labels of `switch` statements.

- Empty declarations

An empty declaration (a semicolon by itself) is allowed, but a remark is issued (provided that remarks are enabled).

- Single-value initialization

Standard C requires that all initializer expressions of static arrays, structs, and unions are enclosed in braces.

Single-value initializers are allowed to appear without braces, but a warning is issued. The compiler accepts this expression:

```
struct str
{
    int a;
} x = 10;
```

- Declarations in other scopes

External and static declarations in other scopes are visible. In the following example, the variable `y` can be used at the end of the function, even though it should only be visible in the body of the `if` statement. A warning is issued.

```
int test(int x)
{
    if (x)
    {
        extern int y;
        y = 1;
    }

    return y;
}
```

- Expanding function names into strings with the function as context

Use any of the symbols `__func__` or `__FUNCTION__` inside a function body to make the symbol expand into a string that contains the name of the current function. Use the symbol `__PRETTY_FUNCTION__` to also include the parameter types and return type. The result might, for example, look like this if you use the `__PRETTY_FUNCTION__` symbol:

```
"void func(char)"
```

These symbols are useful for assertions and other trace utilities and they require that language extensions are enabled, see *-e*, page 247.

- Static functions in function and block scopes

Static functions may be declared in function and block scopes. Their declarations are moved to the file scope.

- Numbers scanned according to the syntax for numbers

Numbers are scanned according to the syntax for numbers rather than the `pp-number` syntax. Thus, `0x123e+1` is scanned as three tokens instead of one valid token. (If the `--strict` option is used, the `pp-number` syntax is used instead.)



# Using C++

- Overview—EC++ and EEC++
- Overview—Standard C++
- Enabling support for C++ and variants
- C++ and EC++ feature descriptions
- EEC++ feature description
- EC++ and C++ language extensions

---

## Overview—EC++ and EEC++

IAR Systems supports the C++ language. You can choose between these standards: Standard C++, the industry-standard Embedded C++, and Extended Embedded C++. *Using C++* describes what you need to consider when using the C++ language.

Embedded C++ is a proper subset of the ISO/IEC C++ standard which is intended for embedded systems programming. It was defined by an industry consortium, the Embedded C++ Technical Committee. Performance and portability are particularly important in embedded systems development, which was considered when defining the language. EC++ offers the same object-oriented benefits as C++, but without some features that can increase code size and execution time in ways that are hard to predict.

### EMBEDDED C++

These C++ features are supported:

- Classes, which are user-defined types that incorporate both data structure and behavior; the essential feature of inheritance allows data structure and behavior to be shared among classes
- Polymorphism, which means that an operation can behave differently on different classes, is provided by virtual functions
- Overloading of operators and function names, which allows several operators or functions with the same name, provided that their argument lists are sufficiently different
- Type-safe memory management using the operators `new` and `delete`
- Inline functions, which are indicated as particularly suitable for inline expansion.

C++ features that are excluded are those that introduce overhead in execution time or code size that are beyond the control of the programmer. Also excluded are features added very late before Standard C++ was defined. Embedded C++ thus offers a subset of C++ which is efficient and fully supported by existing development tools.

Embedded C++ lacks these features of C++:

- Templates
- Multiple and virtual inheritance
- Exception handling
- Runtime type information
- New cast syntax (the operators `dynamic_cast`, `static_cast`, `reinterpret_cast`, and `const_cast`)
- Namespaces
- The `mutable` attribute.

The exclusion of these language features makes the runtime library significantly more efficient. The Embedded C++ library furthermore differs from the full C++ library in that:

- The standard template library (STL) is excluded
- Streams, strings, and complex numbers are supported without the use of templates
- Library features which relate to exception handling and runtime type information (the headers `except`, `stdexcept`, and `typeinfo`) are excluded.

**Note:** The library is not in the `std` namespace, because Embedded C++ does not support namespaces.

## EXTENDED EMBEDDED C++

IAR Systems' Extended EC++ is a slightly larger subset of C++ which adds these features to the standard EC++:

- Full template support
- Multiple and virtual inheritance
- Namespace support
- The `mutable` attribute
- The cast operators `static_cast`, `const_cast`, and `reinterpret_cast`.

All these added features conform to the C++ standard.

To support Extended EC++, this product includes a version of the standard template library (STL), in other words, the C++ standard chapters utilities, containers, iterators, algorithms, and some numerics. This STL is tailored for use with the Extended EC++



language, which means no exceptions and no support for runtime type information (RTTI). Moreover, the library is not in the `std` namespace.

**Note:** A module compiled with Extended EC++ enabled is fully link-compatible with a module compiled without Extended EC++ enabled.

---

## Overview—Standard C++

The IAR C++ implementation fully complies with the ISO/IEC 14882:2003 C++ standard. In this guide, this standard is referred to as Standard C++.

The main reason for using Standard C++ instead of EC++ or EEC++ is when there is a need for either:

- Exception support
- Runtime type information (RTTI) support
- The standard C++ library (the EC++ library is a stripped version of the C++ library where streams and strings are not templates).

If code size is important and your application does not need any of these features, EC++ (or EEC++) is the better choice.

### MODES FOR EXCEPTIONS AND RTTI SUPPORT

Both exceptions and runtime type information result in increased code size simply by being included in your application. You might want to disable either or both of these features to avoid this increase:

- Support for runtime type information constructs can be disabled by using the compiler option `--no_rtti`
- Support for exceptions can be disabled by using the compiler option `--no_exceptions`

Even if support is enabled while compiling, the linker can avoid including the extra code and tables in the final application. If no part of your application actually throws an exception, the code and tables supporting the use of exceptions are not included in the application code image. Also, if dynamic runtime type information constructs (`dynamic_cast/typeid`) are not used with polymorphic types, the objects needed to support them are not included in the application code image. To control this behavior, use the linker options `--no_exceptions`, `--force_exceptions`, and `--no_dynamic_rtti_elimination`.

## Disabling exception support

When you use the compiler option `--no_exceptions`, the following will generate a compiler error:

- `throw` expressions
- `try-catch` statements
- Exception specifications on function definitions.

In addition, the extra code and tables needed to handle destruction of objects with auto storage duration when an exception is propagated through a function will not be generated when the compiler option `--no_exceptions` is used.

All functionality in system headers not directly involving exceptions is supported when the compiler option `--no_exceptions` is used.

The linker will produce an error if you try to link C++ modules compiled with exception support with modules compiled without exception support

For more information, see `--no_exceptions`, page 257.

## Disabling RTTI support

When you use the compiler option `--no_rtti`, the following will generate a compiler error:

- The `typeid` operator
- The `dynamic_cast` operator.

**Note:** If `--no_rtti` is used but exception support is enabled, most RTTI support is still included in the compiler output object file because it is needed for exceptions to work.

For more information, see `--no_rtti`, page 260.

## EXCEPTION HANDLING

Exception handling can be divided into three parts:

- Exception raise mechanisms—in C++ they are the `throw` and `rethrow` expressions.
- Exception catch mechanisms—in C++ they are the `try-catch` statements, the exception specifications for a function, and the implicit catch to prevent an exception leaking out from `main`.
- Information about currently active functions—if they have `try-catch` statements and the set of auto objects whose destructors need to be run if an exception is propagated through the function.

When an exception is raised, the function call stack is unwound, function by function, block by block. For each function or block, the destructors of auto objects that need destruction are run, and a check is made whether there is a catch handler for the exception. If there is, the execution will continue from that catch handler.

An application that mixes C++ code with assembler and C code, and that throws exceptions from one C++ function to another via assembler routines and C functions must use the linker option `--exception_tables` with the argument `unwind`.

### The implementation of exceptions

Exceptions are implemented using a table method. For each function, the tables describe:

- How to unwind the function, that is, how to find its caller on the stack and restore registers that need restoring
- Which catch handlers that exist in the function
- Whether the function has an exception specification and which exceptions it allows to propagate
- The set of auto objects whose destructors must be run.

When an exception is raised, the runtime will proceed in two phases. The first phase will use the exception tables to search the stack for a function invocation containing a catch handler or exception specification that would cause stack unwinding to halt at that point. Once this point is found, the second phase is entered, doing the actual unwinding, and running the destructors of auto objects where that is needed.

The table method results in virtually no overhead in execution time or RAM usage when an exception is not actually thrown. It does incur a significant penalty in read-only memory usage for the tables and the extra code, and throwing and catching an exception is a relatively expensive operation.

The destruction of auto objects when the stack is being unwound as a result of an exception is implemented in code separated from the code that handles the normal operation of a function. This code, together with the code in catch handlers, is placed in a separate section (`.exc.text`) from the normal code (normally placed in `.text`). In some cases, for instance when there is fast and slow ROM memory, it can be advantageous to select on this difference when placing sections in the linker configuration file.

---

## Enabling support for C++ and variants



In the compiler, the default language is C.

To compile files written in Standard C++, use the `--c++` compiler option. See `--c++`, page 242.

To compile files written in Embedded C++, use the `--ec++` compiler option. See `--ec++`, page 248.

To take advantage of *Extended* Embedded C++ features in your source code, use the `--eec++` compiler option. See `--eec++`, page 248.



To enable EC++, EEC++, or C++ in the IDE, choose **Project>Options>C/C++ Compiler>Language** and select the appropriate standard.

---

## C++ and EC++ feature descriptions

When you write C++ source code for the IAR C/C++ Compiler for ARM, you must be aware of some benefits and some possible quirks when mixing C++ features—such as classes, and class members—with IAR language extensions, such as IAR-specific attributes.

### USING IAR ATTRIBUTES WITH CLASSES

Static data members of C++ classes are treated the same way global variables are, and can have any applicable IAR type and object attribute.

Member functions are in general treated the same way free functions are, and can have any applicable IAR type and object attributes. Virtual member functions can only have attributes that are compatible with default function pointers, and constructors and destructors cannot have any such attributes.

The location operator `@` and the `#pragma location` directive can be used on static data members and with all member functions.

### Example of using attributes with classes

```
class MyClass
{
public:
    // Locate a static variable in __memattr memory at address 60
    static __no_init int mI @ 60;

    // A static Thumb function
    static __thumb void F();

    // A Thumb function
    __thumb void G();

    // Interworking assumed
    virtual __arm void ArmH();

    // Locate a virtual function into SPECIAL
    virtual void M() const volatile @ "SPECIAL";
};
```

### FUNCTION TYPES

A function type with extern "C" linkage is compatible with a function that has C++ linkage.

#### Example

```
extern "C"
{
    typedef void (*FpC)(void);    // A C function typedef
}

typedef void (*FpCpp)(void);    // A C++ function typedef

FpC F1;
FpCpp F2;
void MyF(FpC);

void MyG()
{
    MyF(F1);                    // Always works
    MyF(F2);                    // FpCpp is compatible with FpC
}
```

## USING STATIC CLASS OBJECTS IN INTERRUPTS

If interrupt functions use static class objects that need to be constructed (using constructors) or destroyed (using destructors), your application will not work properly if the interrupt occurs before the objects are constructed, or, during or after the objects are destroyed.

To avoid this, make sure that these interrupts are not enabled until the static objects have been constructed, and are disabled when returning from `main` or calling `exit`. For information about system startup, see *System startup and termination*, page 117.

Function local static class objects are constructed the first time execution passes through their declaration, and are destroyed when returning from `main` or when calling `exit`.

## USING NEW HANDLERS

To handle memory exhaustion, you can use the `set_new_handler` function.

### New handlers in Standard C++

If you do not call `set_new_handler`, or call it with a NULL new handler, and `operator new` fails to allocate enough memory, `operator new` will throw `std::bad_alloc` if exceptions are enabled. If exceptions are not enabled, `operator new` will instead call `abort`.

If you call `set_new_handler` with a non-NULL new handler, the provided new handler will be called by `operator new` if the `operator new` fails to allocate enough memory. The new handler must then make more memory available and return, or abort execution in some manner. If exceptions are enabled, the new handler can also throw a `std::bad_alloc` exception. The `nothrow` variant of `operator new` will only return NULL in the presence of a new handler if exceptions are enabled and the new handler throws `std::bad_alloc`.

### New handlers in Embedded C++

If you do not call `set_new_handler`, or call it with a NULL new handler, and `operator new` fails to allocate enough memory, it will call `abort`. The `nothrow` variant of the new operator will instead return NULL.

If you call `set_new_handler` with a non-NULL new handler, the provided new handler will be called by `operator new` if `operator new` fails to allocate memory. The new handler must then make more memory available and return, or abort execution in some manner. The `nothrow` variant of `operator new` will never return NULL in the presence of a new handler.

## TEMPLATES

C++ and Extended EC++ supports templates according to the C++ standard, but not the `export` keyword. The implementation uses a two-phase lookup which means that the keyword `typename` must be inserted wherever needed. Furthermore, at each use of a template, the definitions of all possible templates must be visible. This means that the definitions of all templates must be in include files or in the actual source file.

## DEBUG SUPPORT IN C-SPY

C-SPY® has built-in display support for the STL containers. The logical structure of containers is presented in the watch views in a comprehensive way that is easy to understand and follow.

Using C++, you can make C-SPY stop at a `throw` statement or if a raised exception does not have any corresponding `catch` statement.

For more information about this, see the *C-SPY® Debugging Guide for ARM*.

---

## EEC++ feature description

This section describes features that distinguish Extended EC++ from EC++.

### TEMPLATES

The compiler supports templates with the syntax and semantics as defined by Standard C++. However, note that the STL (standard template library) delivered with the product is tailored for Extended EC++, see *Extended Embedded C++*, page 176.

### VARIANTS OF CAST OPERATORS

In Extended EC++ these additional variants of C++ cast operators can be used:

```
const_cast<to>(from)
static_cast<to>(from)
reinterpret_cast<to>(from)
```

### MUTABLE

The `mutable` attribute is supported in Extended EC++. A `mutable` symbol can be changed even though the whole class object is `const`.

### NAMESPACE

The namespace feature is only supported in *Extended EC++*. This means that you can use namespaces to partition your code. Note, however, that the library itself is not placed in the `std` namespace.

## THE STD NAMESPACE

The `std` namespace is not used in either standard EC++ or in Extended EC++. If you have code that refers to symbols in the `std` namespace, simply define `std` as nothing; for example:

```
#define std
```

You must make sure that identifiers in your application do not interfere with identifiers in the runtime library.

---

## EC++ and C++ language extensions

When you use the compiler in any C++ mode and enable IAR language extensions, the following C++ language extensions are available in the compiler:

- In a friend declaration of a class, the `class` keyword can be omitted, for example:

```
class B;
class A
{
    friend B;           //Possible when using IAR language
                      //extensions
    friend class B;    //According to the standard
};
```

- Constants of a scalar type can be defined within classes, for example:

```
class A
{
    const int mSize = 10; //Possible when using IAR language
                        //extensions
    int mArr[mSize];
};
```

According to the standard, initialized static data members should be used instead.

- In the declaration of a class member, a qualified name can be used, for example:

```
struct A
{
    int A::F(); // Possible when using IAR language extensions
    int G();   // According to the standard
};
```

- It is permitted to use an implicit type conversion between a pointer to a function with C linkage (`extern "C"`) and a pointer to a function with C++ linkage (`extern "C++"`), for example:

```
extern "C" void F(); // Function with C linkage
void (*PF)()       // PF points to a function with C++ linkage
                  = &F; // Implicit conversion of function pointer.
```



According to the standard, the pointer must be explicitly converted.

- If the second or third operands in a construction that contains the `?` operator are string literals or wide string literals (which in C++ are constants), the operands can be implicitly converted to `char *` or `wchar_t *`, for example:

```
bool X;

char *P1 = X ? "abc" : "def";           //Possible when using IAR
                                         //language extensions
char const *P2 = X ? "abc" : "def";    //According to the standard
```

- Default arguments can be specified for function parameters not only in the top-level function declaration, which is according to the standard, but also in `typedef` declarations, in pointer-to-function function declarations, and in pointer-to-member function declarations.
- In a function that contains a non-static local variable and a class that contains a non-evaluated expression (for example a `sizeof` expression), the expression can reference the non-static local variable. However, a warning is issued.
- An anonymous union can be introduced into a containing class by a `typedef` name. It is not necessary to first declare the union. For example:

```
typedef union
{
    int i,j;
} U; // U identifies a reusable anonymous union.

class A
{
public:
    U; // OK -- references to A::i and A::j are allowed.
};
```

In addition, this extension also permits *anonymous classes* and *anonymous structs*, as long as they have no C++ features (for example, no static data members or member functions, and no non-public members) and have no nested types other than other anonymous classes, structs, or unions. For example:

```
struct A
{
    struct
    {
        int i,j;
    }; // OK -- references to A::i and A::j are allowed.
};
```

- The friend class syntax allows nonclass types as well as class types expressed through a `typedef` without an elaborated type name. For example:

```
typedef struct S ST;

class C
{
public:
    friend S; // Okay (requires S to be in scope)
    friend ST; // Okay (same as "friend S;")
    // friend S const; // Error, cv-qualifiers cannot
                       // appear directly
};
```

**Note:** If you use any of these constructions without first enabling language extensions, errors are issued.

# Application-related considerations

- Output format considerations
- Stack considerations
- Heap considerations
- Interaction between the tools and your application
- Checksum calculation
- Linker optimizations
- AEABI compliance
- CMSIS integration

---

## Output format considerations

The linker produces an absolute executable image in the ELF/DWARF object file format.

You can use the IAR ELF Tool—`ielftool`— to convert an absolute ELF image to a format more suitable for loading directly to memory, or burning to a PROM or flash memory etc.

`ielftool` can produce these output formats:

- Plain binary
- Motorola S-records
- Intel hex.

**Note:** `ielftool` can also be used for other types of transformations, such as filling and calculating checksums in the absolute image.

The source code for `ielftool` is provided in the `arm/src` directory. For more information about `ielftool`, see *The IAR ELF Tool—`ielftool`*, page 450.

---

## Stack considerations

To make your application use stack memory efficiently, there are some considerations to be made.

### STACK SIZE CONSIDERATIONS

The required stack size depends heavily on the application's behavior. If the given stack size is too large, RAM will be wasted. If the given stack size is too small, one of two things can happen, depending on where in memory you located your stack:

- Variable storage will be overwritten, leading to undefined behavior
- The stack will fall outside of the memory area, leading to an abnormal termination of your application.

Both alternatives are likely to result in application failure. Because the second alternative is easier to detect, you should consider placing your stack so that it grows toward the end of the memory.

For more information about the stack size, see *Setting up stack memory*, page 95, and *Saving stack space and RAM memory*, page 214.

### STACK ALIGNMENT

The default `cstartup` code automatically initializes all stacks to an 8-byte aligned address.

For more information about aligning the stack, see *Calling convention*, page 153 and more specifically *Special registers*, page 155 and *Stack parameters and layout*, page 157.

### EXCEPTION STACK

Cortex-M does not have individual exception stacks. By default, all exception stacks are placed in the `CSTACK` section.

The ARM7/9/11, Cortex-A, and Cortex-R devices support five exception modes which are entered when different exceptions occur. Each exception mode has its own stack to avoid corrupting the System/User mode stack.

The table shows proposed stack names for the various exception stacks, but any name can be used:

Processor mode	Proposed stack section name	Description
Supervisor	<code>SVC_STACK</code>	Operation system stack.

Table 25: Exception stacks for ARM7/9/11, Cortex-A, and Cortex-R

Processor mode	Proposed stack section name	Description
IRQ	IRQ_STACK	Stack for general-purpose (IRQ) interrupt handlers.
FIQ	FIQ_STACK	Stack for high-speed (FIQ) interrupt handlers.
Undefined	UND_STACK	Stack for undefined instruction interrupts. Supports software emulation of hardware coprocessors and instruction set extensions.
Abort	ABT_STACK	Stack for instruction fetch and data access memory abort interrupt handlers.

Table 25: Exception stacks for ARM7/9/11, Cortex-A, and Cortex-R

For each processor mode where a stack is needed, a separate stack pointer must be initialized in your startup code, and section placement should be done in the linker configuration file. The IRQ and FIQ stacks are the only exception stacks which are preconfigured in the supplied `cstartup.s` and `lnkarm.icf` files, but other exception stacks can easily be added.



To view any of these stacks in the Stack window available in the IDE, these preconfigured section names must be used instead of user-defined section names.

## Heap considerations

The heap contains dynamic data allocated by use of the C function `malloc` (or a corresponding function) or the C++ operator `new`.

If your application uses dynamic memory allocation, you should be familiar with:

- Linker sections used for the heap
- Allocating the heap size, see *Setting up heap memory*, page 95.

### ADVANCED VERSUS BASIC HEAP

Based on how your application uses the heap interface, the linker automatically chooses the appropriate heap memory handler. You can use a linker option to override this choice and explicitly specify which handler you want to use:

- The basic heap (`--basic_heap`)—introduces less overhead and is suitable for example in applications that only allocate heap memory, but never call `free`. For any other use of the heap, the advanced heap is usually more efficient. See `--basic_heap`, page 278.

- The advanced heap (`--advanced_heap`)—provides efficient memory management which is useful for an application that either uses the heap interface extensively or that repeatedly frees memory. See `--advanced_heap`, page 278. For information about the definition, see `iar_dmalloc.h`, page 406.

## HEAP SIZE AND STANDARD I/O



If you excluded `FILE` descriptors from the DLIB runtime environment, as in the Normal configuration, there are no input and output buffers at all. Otherwise, as in the Full configuration, be aware that the size of the input and output buffers is set to 512 bytes in the `stdio` library header file. If the heap is too small, I/O will not be buffered, which is considerably slower than when I/O is buffered. If you execute the application using the simulator driver of the IAR C-SPY® Debugger, you are not likely to notice the speed penalty, but it is quite noticeable when the application runs on an ARM core. If you use the standard I/O library, you should set the heap size to a value which accommodates the needs of the standard I/O buffer.

---

## Interaction between the tools and your application

The linking process and the application can interact symbolically in four ways:

- Creating a symbol by using the linker command line option `--define_symbol`. The linker will create a public absolute constant symbol that the application can use as a label, as a size, as setup for a debugger, etc.
- Creating an exported configuration symbol by using the command line option `--config_def` or the configuration directive `define symbol`, and exporting the symbol using the `export symbol` directive. `ILINK` will create a public absolute constant symbol that the application can use as a label, as a size, as setup for a debugger, etc.  
One advantage of this symbol definition is that this symbol can also be used in expressions in the configuration file, for example to control the placement of sections into memory ranges.
- Using the compiler operators `__section_begin`, `__section_end`, or `__section_size`, or the assembler operators `SFB`, `SFE`, or `SIZEOF` on a named section or block. These operators provide access to the start address, end address, and size of a contiguous sequence of sections with the same name, or of a linker block specified in the linker configuration file.
- The command line option `--entry` informs the linker about the start label of the application. It is used by the linker as a root symbol and to inform the debugger where to start execution.

The following lines illustrate how to use `-D` to create a symbol. If you need to use this mechanism, add these options to your command line like this:

```
--define_symbol NrOfElements=10
--config_def HEAP_SIZE=1024
```

The linker configuration file can look like this:

```
define memory Mem with size = 4G;
define region ROM = Mem:[from 0x00000 size 0x10000];
define region RAM = Mem:[from 0x20000 size 0x10000];

/* Export of symbol */
export symbol MY_HEAP_SIZE;

/* Setup a heap area with a size defined by an ILINK option */
define block MyHEAP with size = MY_HEAP_SIZE, alignment = 8 {};

place in RAM { block MyHEAP };
```

Add these lines to your application source code:

```
#include <stdlib.h>

/* Use symbol defined by ILINK option to dynamically allocate an
array of elements with specified size. The value takes the form
of a label.
*/
extern int NrOfElements;

typedef char Elements;
Elements *GetElementArray()
{
    return malloc(sizeof(Elements) * (long) &NrOfElements);
}

/* Use a symbol defined by ILINK option, a symbol that in the
* configuration file was made available to the application.
*/
extern char MY_HEAP_SIZE;
```

```

/* Declare the section that contains the heap. */
#pragma section = "MYHEAP"

char *MyHeap()
{
    /* First get start of statically allocated section, */
    char *p = __section_begin("MYHEAP");

    /* ...then we zero it, using the imported size. */
    for (int i = 0; i < (int) &MY_HEAP_SIZE; ++i)
    {
        p[i] = 0;
    }
    return p;
}

```

---

## Checksum calculation

The IAR ELF Tool—`ielftool`—fills specific ranges of memory with a pattern and then calculates a checksum for those ranges. The calculated checksum replaces the value of an existing symbol in the input ELF image. The application can then verify that the ranges did not change.

To use checksumming to verify the integrity of your application, you must:

- Reserve a place, with an associated name and size, for the checksum calculated by `ielftool`
- Choose a checksum algorithm, set up `ielftool` for it, and include source code for the algorithm in your application
- Decide which memory ranges to verify and set up `ielftool` and the source code for it in your application source code.



To set up `ielftool` in the IDE, choose **Project>Options>Linker>Checksum**.

### CALCULATING A CHECKSUM

In this example, a checksum is calculated for ROM memory at `0x8002` up to `0x8FFF` and the 2-byte calculated checksum is placed at `0x8000`.

#### Creating a place for the calculated checksum

You can create a place for the calculated checksum in two ways; by creating a global C/C++ or assembler constant symbol with a proper size, residing in a specific section (in this example `.checksum`), or by using the linker option `--place_holder`.



For example, to create a 2-byte space for the symbol `__checksum` in the section `.checksum`, with alignment 4:

```
--place_holder __checksum,2, .checksum,4
```

**Note:** The `.checksum` section will only be included in your application if the section appears to be needed. If the checksum is not needed by the application itself, you can use the linker option `--keep=__checksum` or the linker directive `keep` to force the section to be included.

To place the `.checksum` section, you must modify the linker configuration file. For example, it can look like this (note the handling of the block `CHECKSUM`):

```
define memory Mem with size = 4G;

define region ROM_region = Mem:[from 0x8000 to 0x80000000 - 1];
define region RAM_region = Mem:[from 0x80000000 to 0x100000000 - 2
];

initialize by copy { rw };
do not initialize { section .noinit };

define block HEAP      with alignment = 8, size = 16M {};
define block CSTACK   with alignment = 8, size = 16K {};
define block IRQ_STACK with alignment = 8, size = 16K {};
define block FIQ_STACK with alignment = 8, size = 16K {};

define block CHECKSUM  { ro section .checksum };
place at address Mem:0x0 { ro section .intvec};
place in ROM_region { ro, first block CHECKSUM };
place in RAM_region { rw, block HEAP, block CSTACK, block
                    IRQ_STACK, block FIQ_STACK };
```

## Running ielftool

To calculate the checksum, run `ielftool`:

```
ielftool --fill=0x00;0x8000-0x8FFF
--checksum=__checksum:2,crc16;0x8000-0x8FFF sourceFile.out
destinationFile.out
```

To calculate a checksum you also must define a fill operation. In this example, the fill pattern `0x0` is used. The checksum algorithm used is `crc16`.

Note that `ielftool` needs an unstripped input ELF image. If you use the `--strip` linker option, remove it and use the `--strip ielftool` option instead.

## ADDING A CHECKSUM FUNCTION TO YOUR SOURCE CODE

To check the value of the `ief1tool` generated checksum, it must be compared with a checksum that your application calculated. This means that you must add a function for checksum calculation (that uses the same algorithm as `ief1tool`) to your application source code. Your application must also include a call to this function.

### A function for checksum calculation

This function—a slow variant but with small memory footprint—uses the `crc16` algorithm:

```
unsigned short SlowCrc16(unsigned short sum,
                        unsigned char *p,
                        unsigned int len)
{
    while (len--)
    {
        int i;
        unsigned char byte = *(p++);

        for (i = 0; i < 8; ++i)
        {
            unsigned long oSum = sum;
            sum <<= 1;
            if (byte & 0x80)
                sum |= 1;
            if (oSum & 0x8000)
                sum ^= 0x1021;
            byte <<= 1;
        }
    }
    return sum;
}
```

You can find the source code for the checksum algorithms in the `arm\src\linker` directory of your product installation.

## Example of checksum calculation

This code gives an example of how the checksum can be calculated:

```

/* The checksum calculated
 * (note that it is located on address 0x8000)
 */
extern unsigned short const __checksum;

void TestChecksum()
{
    unsigned short calc = 0;
    unsigned char zeros[2] = {0, 0};

    /* Run the checksum algorithm */
    calc = SlowCrc16(0,
                    (unsigned char *) checksumStart,
                    (checksumEnd - checksumStart+1));

    /* Rotate out the answer */
    calc = SlowCrc16(calc, zeros, 2);

    /* Test the checksum */
    if (calc != __checksum)
    {
        abort(); /* Failure */
    }
}

```

## THINGS TO REMEMBER

When calculating a checksum, you must remember that:

- The checksum must be calculated from the lowest to the highest address for every memory range
- Each memory range must be verified in the same order as defined (ABC is not the same as ACB)
- It is OK to have several ranges for one checksum
- If several checksums are used, you should place them in sections with unique names and use unique symbol names
- If the a slow function variant is used, you must make a final call to the checksum calculation with as many bytes (with the value 0x00) as there are bytes in the checksum.
- Never calculate a checksum on a location that contains a checksum.

For more information, see also *The IAR ELF Tool—ielftool*, page 450.

### C-SPY CONSIDERATIONS

By default, a symbol that you have allocated in memory by using the linker option `--place_holder` is considered by C-SPY to be of the type `int`. If the size of the checksum is different than the size of an `int`, you can change the display format of the checksum symbol to match its size.



In the C-SPY Watch window, select the symbol and choose **Show As** from the context menu. Choose the display format that matches the size of the checksum symbol.

## Linker optimizations

### VIRTUAL FUNCTION ELIMINATION

Virtual Function Elimination (VFE) is a linker optimization that removes unneeded virtual functions and dynamic runtime type information.

In order for Virtual Function Elimination to work, all relevant modules must provide information about virtual function table layout, which virtual functions are called, and for which classes dynamic runtime type information is needed. If one or more modules do not provide this information, a warning is generated by the linker and Virtual Function Elimination is not performed.

If you know that modules that lack such information do not perform any virtual function calls and do not define any virtual function tables, you can use the `--vfe=forced` linker option to enable Virtual Function Elimination anyway.

Currently, tools from IAR Systems and from RealView provide the information needed for Virtual Function Elimination in a way that the linker can use.

Note that you can disable Virtual Function Elimination entirely by using the `--no_vfe` linker option. In this case, no warning will be issued for modules that lack VFE information.

For more information, see `--vfe`, page 301 and `--no_vfe`, page 296.

## AEABI compliance

The IAR build tools for ARM support the Embedded Application Binary Interface for ARM, AEABI, defined by ARM Limited. This interface is based on the Intel IA64 ABI interface. The advantage of adhering to AEABI is that any such module can be linked with any other AEABI-compliant module, even modules produced by tools provided by other vendors.

The IAR build tools for ARM support the following parts of the AEABI:

AAPCS	Procedure Call Standard for the ARM architecture
CPPABI	C++ ABI for the ARM architecture (EC++ parts only)
AAELF	ELF for the ARM architecture
AADWARF	DWARF for the ARM architecture
RTABI	Runtime ABI for the ARM architecture
CLIBABI	C library ABI for the ARM architecture

The IAR build tools only support a *bare metal* platform, that is a ROM-based system that lacks an explicit operating system.

Note that:

- The AEABI is specified for C89 only
- The IAR build tools only support using the default and C locales
- The AEABI does not specify C++ library compatibility
- Neither the size of an `enum` or of `wchar_t` is constant in the AEABI.

If AEABI compliance is enabled, almost all optimizations performed in the system header files are turned off, and certain preprocessor constants become real constant variables instead.

## LINKING AEABI-COMPLIANT MODULES USING THE IAR ILINK LINKER

When building an application using the IAR ILINK Linker, the following types of modules can be combined:

- Modules produced using IAR build tools, both AEABI-compliant modules as well as modules that are not AEABI-compliant
- AEABI-compliant modules produced using build tools from another vendor.

**Note:** To link a module produced by a compiler from another vendor, extra support libraries from that vendor might be required.

The IAR ILINK Linker automatically chooses the appropriate standard C/C++ libraries to use based on attributes from the object files. Imported object files might not have all these attributes. Therefore, you might need to help ILINK choose the standard library by verifying one or more of the following details:

- The used CPU by specifying the `--cpu` linker option

- If full I/O is needed; make sure to link with a Full library configuration in the standard library
- Explicitly specify runtime library file(s), possibly in combination with the `--no_library_search` linker option.

When linking, you should also consider virtual function elimination, see *Virtual function elimination*, page 196.

## LINKING AEABI-COMPLIANT MODULES USING A THIRD-PARTY LINKER

If you have a module produced using the IAR C/C++ Compiler and you plan to link that module using a linker from a different vendor, that module must be AEABI-compliant, see *Enabling AEABI compliance in the compiler*, page 198.

In addition, if that module uses any of the IAR-specific compiler extensions, you must make sure that those features are also supported by the tools from the other vendor. Note specifically:

- Support for the following extensions must be verified: `#pragma pack`, `__no_init`, `__root`, and `__ramfunc`
- The following extensions are harmless to use: `#pragma location/@`, `__arm`, `__thumb`, `__swi`, `__irq`, `__fiq`, and `__nested`.

## ENABLING AEABI COMPLIANCE IN THE COMPILER

You can enable AEABI compliance in the compiler by setting the `--aeabi` option. In this case, you must also use the `--guard_calls` option.



In the IDE, use the **Project>Options>C/C++ Compiler>Extra Options** page to specify the `--aeabi` and `--guard_calls` options.



On the command line, use the options `--aeabi` and `--guard_calls` to enable AEABI support in the compiler.

Alternatively, to enable support for AEABI for a specific system header file, you must define the preprocessor symbol `_AEABI_PORTABILITY_LEVEL` to non-zero prior to including a system header file, and make sure that the symbol `AEABI_PORTABLE` is set to non-zero after the inclusion of the header file:

```
#define _AEABI_PORTABILITY_LEVEL 1
#undef _AEABI_PORTABLE
#include <header.h>
#ifdef _AEABI_PORTABLE
    #error "header.h not AEABI compatible"
#endif
```

## CMSIS integration

The `arm\CMSIS` subdirectory contains CMSIS (Cortex Microcontroller Software Interface Standard) and CMSIS DSP header and library files, and documentation. For more information about CMSIS, see <http://www.arm.com/cmsis>.

The special header file `inc\c\CMSIS_IAR.h` is provided as a CMSIS adaptation of the current version of the IAR C/C++ Compiler.

### CMSIS DSP LIBRARY

IAR Embedded Workbench comes with prebuilt CMSIS DSP libraries in the `arm\CMSIS\Lib\IAR` directory. The names of the library files are constructed in this way:

```
iar_cortexM<0|3|4><1|b>[f]_math.a
```

where `<0|3|4>` selects the Cortex-M variant, `<1|b>` selects the byte order, and `[f]` indicates that the library is built for FPU (Cortex-M4 only).

The libraries for Cortex-M4 are applicable also to Cortex-M7.

### CUSTOMIZING THE CMSIS DSP LIBRARY

The source code of the CMSIS DSP library is provided in the `arm\CMSIS\DSP_Lib\Source` directory. You can find an IAR Embedded Workbench project which is prepared for building a customized DSP library in the `arm\CMSIS\DSP_Lib\Source\IAR` directory.



### BUILDING WITH CMSIS ON THE COMMAND LINE

This section contains examples of how to build your CMSIS-compatible application on the command line.

#### CMSIS only (that is without the DSP library)

```
iccarm -I $EW_DIR$\arm\CMSIS\Include
```

#### With the DSP library, for Cortex-M4, little-endian, and with FPU

```
iccarm --endian=little --cpu=Cortex-M4 --fpu=VFPv4_sp -I  
$EW_DIR$\arm\CMSIS\Include -D ARM_MATH_CM4
```

```
ilinkarm $EW_DIR$\arm\CMSIS\Lib\IAR\iar_cortexM3l_math.a
```



## **BUILDING WITH CMSIS IN THE IDE**

Choose **Project>Options>General Options>Library Configuration** to enable CMSIS support.

When enabled, CMSIS include paths and the DSP library will automatically be used. For more information, see the *IDE Project Management and Building Guide for ARM*.



# Efficient coding for embedded applications

- Selecting data types
- Controlling data and function placement in memory
- Controlling compiler optimizations
- Facilitating good code generation

---

## Selecting data types

For efficient treatment of data, you should consider the data types used and the most efficient placement of the variables.

### USING EFFICIENT DATA TYPES

The data types you use should be considered carefully, because this can have a large impact on code size and code speed.

- Use `int` or `long` instead of `char` or `short` whenever possible, to avoid sign extension or zero extension. In particular, loop indexes should always be `int` or `long` to minimize code generation. Also, in Thumb mode, accesses through the stack pointer (`SP`) is restricted to 32-bit data types, which further emphasizes the benefits of using one of these data types.
- Use unsigned data types, unless your application really requires signed values.
- Be aware of the costs of using 64-bit data types, such as `double` and `long long`.
- Bitfields and packed structures generate large and slow code.
- Using floating-point types on a microprocessor without a math co-processor is very inefficient, both in terms of code size and execution speed.
- Declaring a pointer to `const` data tells the calling function that the data pointed to will not change, which opens for better optimizations.

For information about representation of supported data types, pointers, and structures types, see the chapter *Data representation*.

## FLOATING-POINT TYPES

Using floating-point types on a microprocessor without a math coprocessor is very inefficient, both in terms of code size and execution speed. Thus, you should consider replacing code that uses floating-point operations with code that uses integers, because these are more efficient.

The compiler supports two floating-point formats—32 and 64 bits. The 32-bit floating-point type `float` is more efficient in terms of code size and execution speed. However, the 64-bit format `double` supports higher precision and larger numbers.

In the compiler, the floating-point type `float` always uses the 32-bit format., and the type `double` always uses the 64-bit format.

Unless the application requires the extra precision that 64-bit floating-point numbers give, we recommend using 32-bit floating-point numbers instead.

By default, a *floating-point constant* in the source code is treated as being of the type `double`. This can cause innocent-looking expressions to be evaluated in double precision. In the example below `a` is converted from a `float` to a `double`, the `double` constant `1.0` is added and the result is converted back to a `float`:

```
double Test(float a)
{
    return a + 1.0;
}
```

To treat a floating-point constant as a `float` rather than as a `double`, add the suffix `f` to it, for example:

```
double Test(float a)
{
    return a + 1.0f;
}
```

For more information about floating-point types, see *Basic data types—floating-point types*, page 312.

## ALIGNMENT OF ELEMENTS IN A STRUCTURE

The ARM core requires that when accessing data in memory, the data must be aligned. Each element in a structure must be aligned according to its specified type requirements. This means that the compiler might need to insert *pad bytes* to keep the alignment correct.

There are situations when this can be a problem:

- There are external demands; for example, network communication protocols are usually specified in terms of data types with no padding in between

- You need to save data memory.

For information about alignment requirements, see *Alignment*, page 305.

Use the `#pragma pack` directive or the `__packed` data type attribute for a tighter layout of the structure. The drawback is that each access to an unaligned element in the structure will use more code.

Alternatively, write your own customized functions for *packing* and *unpacking* structures. This is a more portable way, which will not produce any more code apart from your functions. The drawback is the need for two views on the structure data—packed and unpacked.

For more information about the `#pragma pack` directive, see *pack*, page 347.

## ANONYMOUS STRUCTS AND UNIONS

When a structure or union is declared without a name, it becomes anonymous. The effect is that its members will only be seen in the surrounding scope.

Anonymous structures are part of the C++ language; however, they are not part of the C standard. In the IAR C/C++ Compiler for ARM they can be used in C if language extensions are enabled.



In the IDE, language extensions are enabled by default.



Use the `-e` compiler option to enable language extensions. See *-e*, page 247, for additional information.

### Example

In this example, the members in the anonymous union can be accessed, in function `F`, without explicitly specifying the union name:

```
struct S
{
    char mTag;
    union
    {
        long mL;
        float mF;
    };
} St;

void F(void)
{
    St.mL = 5;
}
```

The member names must be unique in the surrounding scope. Having an anonymous struct or union at file scope, as a global, external, or static variable is also allowed. This could for instance be used for declaring I/O registers, as in this example:

```
__no_init volatile
union
{
    unsigned char IOPORT;
    struct
    {
        unsigned char way: 1;
        unsigned char out: 1;
    };
} @ 0x1000;

/* The variables are used here. */
void Test(void)
{
    IOPORT = 0;
    way = 1;
    out = 1;
}
```

This declares an I/O register byte `IOPORT` at address `0x1000`. The I/O register has 2 bits declared, `way` and `out`. Note that both the inner structure and the outer union are anonymous.

Anonymous structures and unions are implemented in terms of objects named after the first field, with a prefix `_A_` to place the name in the implementation part of the namespace. In this example, the anonymous union will be implemented through an object named `_A_IOPORT`.

---

## Controlling data and function placement in memory

The compiler provides different mechanisms for controlling placement of functions and data objects in memory. To use memory efficiently, you should be familiar with these mechanisms and know which one is best suited for different situations. You can use:

- The `@` operator and the `#pragma location` directive for absolute placement. Using the `@` operator or the `#pragma location` directive, you can place individual global and static variables at absolute addresses. Note that it is not possible to use this notation for absolute placement of individual functions. For more information, see *Data placement at an absolute location*, page 205.

- The @ operator and the #pragma location directive for section placement.  
Using the @ operator or the #pragma location directive, you can place individual functions, variables, and constants in named sections. The placement of these sections can then be controlled by linker directives. For more information, see *Data and function placement in sections*, page 206
- The @ operator and the #pragma location directive for register placement  
Use the @ operator or the #pragma location directive to place individual global and static variables in registers. The variables must be declared \_\_no\_init. This is useful for individual data objects that must be located in a specific register.
- Using the --section option, you can set the default segment for functions, variables, and constants in a particular module. For more information, see *--section*, page 269.

## DATA PLACEMENT AT AN ABSOLUTE LOCATION

The @ operator, alternatively the #pragma location directive, can be used for placing global and static variables at absolute addresses.

To place a variable at an absolute address, the argument to the @ operator and the #pragma location directive should be a literal number, representing the actual address. The absolute location must fulfill the alignment requirement for the variable that should be located.

**Note:** All declarations of \_\_no\_init variables placed at an absolute address are *tentative definitions*. Tentatively defined variables are only kept in the output from the compiler if they are needed in the module being compiled. Such variables will be defined in all modules in which they are used, which will work as long as they are defined in the same way. The recommendation is to place all such declarations in header files that are included in all modules that use the variables.

Other variables placed at an absolute address use the normal distinction between declaration and definition. For these variables, you must provide the definition in only one module, normally with an initializer. Other modules can refer to the variable by using an extern declaration, with or without an explicit address.

### Examples

In this example, a \_\_no\_init declared variable is placed at an absolute address. This is useful for interfacing between multiple processes, applications, etc:

```
__no_init volatile char alpha @ 0xFF2000; /* OK */
```

The next example contains two const declared objects. The first one is not initialized, and the second one is initialized to a specific value. Both objects are placed in ROM. This is useful for configuration parameters, which are accessible from an external

interface. Note that in the second case, the compiler is not obliged to actually read from the variable, because the value is known.

```
#pragma location=0xFF2002
__no_init const int beta;           /* OK */

const int gamma @ 0xFF2004 = 3;     /* OK */
```

In the first case, the value is not initialized by the compiler; the value must be set by other means. The typical use is for configurations where the values are loaded to ROM separately, or for special function registers that are read-only.

This shows incorrect usage:

```
__no_init int epsilon @ 0xFF2007; /* Error, misaligned. */
```

### C++ considerations

In C++, module scoped `const` variables are static (module local), whereas in C they are global. This means that each module that declares a certain `const` variable will contain a separate variable with this name. If you link an application with several such modules all containing (via a header file), for instance, the declaration:

```
volatile const __no_init int x @ 0x100; /* Bad in C++ */
```

the linker will report that more than one variable is located at address 0x100.

To avoid this problem and make the process the same in C and C++, you should declare these variables `extern`, for example:

```
/* The extern keyword makes x public. */
extern volatile const __no_init int x @ 0x100;
```

**Note:** C++ static member variables can be placed at an absolute address just like any other static variable.

## DATA AND FUNCTION PLACEMENT IN SECTIONS

The following method can be used for placing data or functions in named sections other than default:

- The `@` operator, alternatively the `#pragma location` directive, can be used for placing individual variables or individual functions in named sections. The named section can either be a predefined section, or a user-defined section.
- The `--section` option can be used for placing variables and functions, which are parts of the whole compilation unit, in named sections.

C++ static member variables can be placed in named sections just like any other static variable.

If you use your own sections, in addition to the predefined sections, the sections must also be defined in the linker configuration file .

**Note:** Take care when explicitly placing a variable or function in a predefined section other than the one used by default. This is useful in some situations, but incorrect placement can result in anything from error messages during compilation and linking to a malfunctioning application. Carefully consider the circumstances; there might be strict requirements on the declaration and use of the function or variable.

The location of the sections can be controlled from the linker configuration file.

For more information about sections, see the chapter *Section reference*.

### Examples of placing variables in named sections

In the following examples, a data object is placed in a user-defined section. Note that you must place the user-defined section appropriately in the linker configuration file.

```
__no_init int alpha @ "MY_NOINIT"; /* OK */

#pragma location="MY_CONSTANTS"
const int beta = 42;                /* OK */

const int gamma @ "MY_CONSTANTS" = 17; /* OK */
int theta @ "MY_ZEROS";             /* OK */
int phi @ "MY_INITED" = 4711;       /* OK */
```

The linker will in the zero and initialized cases arrange for the correct type of initialization for the variable. When placing a `__no_init` variable in a user-defined section, you must add a pattern that matches that section to your `do not initialize` directive in the linker configuration file. For initialized variables, you can disable the automatic initialization by using the `initialize manually` directive.

### Examples of placing functions in named sections

```
void f(void) @ "MY_FUNCTIONS";

void g(void) @ "MY_FUNCTIONS"
{
}

#pragma location="MY_FUNCTIONS"
void h(void);
```

### DATA PLACEMENT IN REGISTERS

The `@` operator, alternatively the `#pragma location` directive, can be used for placing global and static variables in a register.

To place a variable in a register, the argument to the `@` operator and the `#pragma location` directive should be an identifier that corresponds to an ARM core register in the range R4–R11 (R9 cannot be specified in combination with the `--rwdi` command line option).

A variable can be placed in a register only if it is declared as `__no_init`, has file scope, and its size is four bytes. A variable placed in a register does not have a memory address, so the address operator `&` cannot be used.

Within a module where a variable is placed in a register, the specified register will only be used for accessing that variable. The value of the variable is preserved across function calls to other modules because the registers R14–R11 are callee saved, and as such they are restored when execution returns. However, the value of a variable placed in a register is not always preserved as expected:

- In an exception handler or library callback routine (such as the comparator function passed to `qsort`) the value might not be preserved. The value will be preserved if the command line option `--lock_regs` is used for locking the register in all modules of the application, including library modules.
- In a fast interrupt handler, the value of a variable in R8–R11 is not preserved from outside the handler, because these registers are banked.
- The `longjmp` function and C++ exceptions might restore variables placed in registers to old values, unlike other variables with static storage duration which are not restored.

The linker does not prevent modules from placing different variables in the same register. Variables in different modules can be placed in the same register, and another module could use the register for other purposes.

**Note:** A variable placed in a register should be defined in an include file, to be included in every module that uses the variable. An unused definition in a module will cause the register to not be used in that module.

---

## Controlling compiler optimizations

The compiler performs many transformations on your application to generate the best possible code. Examples of such transformations are storing values in registers instead of memory, removing superfluous code, reordering computations in a more efficient order, and replacing arithmetic operations by cheaper operations.

The linker should also be considered an integral part of the compilation system, because some optimizations are performed by the linker. For instance, all unused functions and variables are removed and not included in the final output.



## SCOPE FOR PERFORMED OPTIMIZATIONS

You can decide whether optimizations should be performed on your whole application or on individual files. By default, the same types of optimizations are used for an entire project, but you should consider using different optimization settings for individual files. For example, put code that must execute very quickly into a separate file and compile it for minimal execution time, and the rest of the code for minimal code size. This will give a small program, which is still fast enough where it matters.

You can also exclude individual functions from the performed optimizations. The `#pragma optimize` directive allows you to either lower the optimization level, or specify another type of optimization to be performed. See *optimize*, page 346, for information about the pragma directive.

## MULTI-FILE COMPILATION UNITS

In addition to applying different optimizations to different source files or even functions, you can also decide what a compilation unit consists of—one or several source code files.

By default, a compilation unit consists of one source file, but you can also use multi-file compilation to make several source files in a compilation unit. The advantage is that interprocedural optimizations such as inlining and cross jump have more source code to work on. Ideally, the whole application should be compiled as one compilation unit. However, for large applications this is not practical because of resource restrictions on the host computer. For more information, see *--mfc*, page 255.

**Note:** Only one object file is generated, and thus all symbols will be part of that object file.

If the whole application is compiled as one compilation unit, it is very useful to make the compiler also discard unused public functions and variables before the interprocedural optimizations are performed. Doing this limits the scope of the optimizations to functions and variables that are actually used. For more information, see *--discard\_unused\_publics*, page 246.

## OPTIMIZATION LEVELS

The compiler supports different levels of optimizations. This table lists optimizations that are typically performed on each level:

Optimization level	Description
None (Best debug support)	Variables live through their entire scope
Low	Same as above but variables only live for as long as they are needed, not necessarily through their entire scope
<i>Table 26: Compiler optimization levels</i>	
Medium	Same as above, and: Live-dead analysis and optimization Dead code elimination Redundant label elimination Redundant branch elimination Code hoisting Peephole optimization Some register content analysis and optimization Common subexpression elimination Code motion Static clustering
High (Balanced)	Same as above, and: Instruction scheduling Cross jumping Advanced register content analysis and optimization Loop unrolling Function inlining Type-based alias analysis

**Note:** Some of the performed optimizations can be individually enabled or disabled. For more information about these, see *Fine-tuning enabled transformations*, page 211.

A high level of optimization might result in increased compile time, and will most likely also make debugging more difficult, because it is less clear how the generated code relates to the source code. For example, at the low, medium, and high optimization levels, variables do not live through their entire scope, which means processor registers used for storing variables can be reused immediately after they were last used. Due to this, the C-SPY Watch window might not be able to display the value of the variable throughout its scope. At any time, if you experience difficulties when debugging your code, try lowering the optimization level.

## SPEED VERSUS SIZE

At the high optimization level, the compiler balances between size and speed optimizations. However, it is possible to fine-tune the optimizations explicitly for either size or speed. They only differ in what thresholds that are used; speed will trade size for speed, whereas size will trade speed for size. Note that one optimization sometimes enables other optimizations to be performed, and an application might in some cases become smaller even when optimizing for speed rather than size.

If you use the optimization level High speed, the `--no_size_constraints` compiler option relaxes the normal restrictions for code size expansion and enables more aggressive optimizations.

## FINE-TUNING ENABLED TRANSFORMATIONS

At each optimization level you can disable some of the transformations individually. To disable a transformation, use either the appropriate option, for instance the command line option `--no_inline`, alternatively its equivalent in the IDE **Function inlining**, or the `#pragma optimize` directive. These transformations can be disabled individually:

- Common subexpression elimination
- Loop unrolling
- Function inlining
- Code motion
- Type-based alias analysis
- Static clustering

### Common subexpression elimination

Redundant re-evaluation of common subexpressions is by default eliminated at optimization levels Medium and High. This optimization normally reduces both code size and execution time. However, the resulting code might be difficult to debug.

**Note:** This option has no effect at optimization levels None and Low.

For more information about the command line option, see `--no_cse`, page 257.

### Loop unrolling

Loop unrolling means that the code body of a loop, whose number of iterations can be determined at compile time, is duplicated. Loop unrolling reduces the loop overhead by amortizing it over several iterations.

This optimization is most efficient for smaller loops, where the loop overhead can be a substantial part of the total loop body.

Loop unrolling, which can be performed at optimization level High, normally reduces execution time, but increases code size. The resulting code might also be difficult to debug.

The compiler heuristically decides which loops to unroll. Only relatively small loops where the loop overhead reduction is noticeable will be unrolled. Different heuristics are used when optimizing for speed, size, or when balancing between size and speed.

**Note:** This option has no effect at optimization levels None, Low, and Medium.

To disable loop unrolling, use the command line option `--no_unroll`, see `--no_unroll`, page 263.

### Function inlining

Function inlining means that a function, whose definition is known at compile time, is integrated into the body of its caller to eliminate the overhead of the call. This optimization normally reduces execution time, but might increase the code size.

For more information, see *Inlining functions*, page 71.

### Code motion

Evaluation of loop-invariant expressions and common subexpressions are moved to avoid redundant re-evaluation. This optimization, which is performed at optimization level Medium and above, normally reduces code size and execution time. The resulting code might however be difficult to debug.

**Note:** This option has no effect at optimization levels below Medium.

For more information about the command line option, see `--no_code_motion`, page 256.

### Type-based alias analysis

When two or more pointers reference the same memory location, these pointers are said to be *aliases* for each other. The existence of aliases makes optimization more difficult because it is not necessarily known at compile time whether a particular value is being changed.

Type-based alias analysis optimization assumes that all accesses to an object are performed using its declared type or as a `char` type. This assumption lets the compiler detect whether pointers can reference the same memory location or not.

Type-based alias analysis is performed at optimization level High. For application code conforming to standard C or C++ application code, this optimization can reduce code size and execution time. However, non-standard C or C++ code might result in the compiler producing code that leads to unexpected behavior. Therefore, it is possible to turn this optimization off.

**Note:** This option has no effect at optimization levels None, Low, and Medium.  
For more information about the command line option, see `--no_tbaa`, page 262.

### Example

```
short F(short *p1, long *p2)
{
    *p2 = 0;
    *p1 = 1;
    return *p2;
}
```

With type-based alias analysis, it is assumed that a write access to the `short` pointed to by `p1` cannot affect the `long` value that `p2` points to. Thus, it is known at compile time that this function returns 0. However, in non-standard-conforming C or C++ code these pointers could overlap each other by being part of the same union. If you use explicit casts, you can also force pointers of different pointer types to point to the same memory location.

### Static clustering

When static clustering is enabled, static and global variables that are defined within the same module are arranged so that variables that are accessed in the same function are stored close to each other. This makes it possible for the compiler to use the same base pointer for several accesses.

**Note:** This option has no effect at optimization levels None and Low.

For more information about the command line option, see `--no_clustering`, page 256.

### Instruction scheduling

The compiler features an instruction scheduler to increase the performance of the generated code. To achieve that goal, the scheduler rearranges the instructions to minimize the number of pipeline stalls emanating from resource conflicts within the microprocessor. Note that not all cores benefit from scheduling. The resulting code might be difficult to debug.

**Note:** This option has no effect at optimization levels None, Low and Medium.

For more information about the command line option, see `--no_scheduling`, page 260.

---

## Facilitating good code generation

This section contains hints on how to help the compiler generate good code, for example:

- Using efficient addressing modes
- Helping the compiler optimize
- Generating more useful error message.

### WRITING OPTIMIZATION-FRIENDLY SOURCE CODE

The following is a list of programming techniques that will, when followed, enable the compiler to better optimize the application.

- Local variables—auto variables and parameters—are preferred over static or global variables. The reason is that the optimizer must assume, for example, that called functions can modify non-local variables. When the life spans for local variables end, the previously occupied memory can then be reused. Globally declared variables will occupy data memory during the whole program execution.
- Avoid taking the address of local variables using the `&` operator. This is inefficient for two main reasons. First, the variable must be placed in memory, and thus cannot be placed in a processor register. This results in larger and slower code. Second, the optimizer can no longer assume that the local variable is unaffected over function calls.
- Module-local variables—variables that are declared static—are preferred over global variables (non-static). Also avoid taking the address of frequently accessed static variables.
- The compiler is capable of inlining functions, see *Function inlining*, page 212. To maximize the effect of the inlining transformation, it is good practice to place the definitions of small functions called from more than one module in the header file rather than in the implementation file. Alternatively, you can use multi-file compilation. For more information, see *Multi-file compilation units*, page 209.
- Avoid using inline assembler without operands and clobbered resources. Instead, use SFRs or intrinsic functions if available. Otherwise, use inline assembler *with* operands and clobbered resources or write a separate module in assembler language. For more information, see *Mixing C and assembler*, page 141.

### SAVING STACK SPACE AND RAM MEMORY

The following is a list of programming techniques that will, when followed, save memory and stack space:

- If stack space is limited, avoid long call chains and recursive functions.

- Avoid using large non-scalar types, such as structures, as parameters or return type. To save stack space, you should instead pass them as pointers or, in C++, as references.

## FUNCTION PROTOTYPES

It is possible to declare and define functions using one of two different styles:

- Prototyped
- Kernighan & Ritchie C (K&R C)

Both styles are valid C, however it is strongly recommended to use the prototyped style, and provide a prototype declaration for each public function in a header that is included both in the compilation unit defining the function and in all compilation units using it.

The compiler will not perform type checking on parameters passed to functions declared using K&R style. Using prototype declarations will also result in more efficient code in some cases, as there is no need for type promotion for these functions.

To make the compiler require that all function definitions use the prototyped style, and that all public functions have been declared before being defined, use the **Project>Options>C/C++ Compiler>Language 1>Require prototypes** compiler option (`--require_prototypes`).

### Prototyped style

In prototyped function declarations, the type for each parameter must be specified.

```
int Test(char, int); /* Declaration */

int Test(char ch, int i) /* Definition */
{
    return i + ch;
}
```

### Kernighan & Ritchie style

In K&R style—pre-Standard C—it is not possible to declare a function prototyped. Instead, an empty parameter list is used in the function declaration. Also, the definition looks different.

For example:

```
int Test();      /* Declaration */

int Test(ch, i) /* Definition */
char ch;
int i;
{
    return i + ch;
}
```

## INTEGER TYPES AND BIT NEGATION

In some situations, the rules for integer types and their conversion lead to possibly confusing behavior. Things to look out for are assignments or conditionals (test expressions) involving types with different size, and logical operations, especially bit negation. Here, *types* also includes types of constants.

In some cases there might be warnings (for example, for constant conditional or pointless comparison), in others just a different result than what is expected. Under certain circumstances the compiler might warn only at higher optimizations, for example, if the compiler relies on optimizations to identify some instances of constant conditionals. In this example an 8-bit character, a 32-bit integer, and two's complement is assumed:

```
void F1(unsigned char c1)
{
    if (c1 == ~0x80)
        ;
}
```

Here, the test is always false. On the right hand side, `0x80` is `0x00000080`, and `~0x00000080` becomes `0xFFFFF7F`. On the left hand side, `c1` is an 8-bit unsigned character, so it cannot be larger than 255. It also cannot be negative, which means that the integral promoted value can never have the topmost 24 bits set.

## PROTECTING SIMULTANEOUSLY ACCESSED VARIABLES

Variables that are accessed asynchronously, for example by interrupt routines or by code executing in separate threads, must be properly marked and have adequate protection. The only exception to this is a variable that is always *read-only*.

To mark a variable properly, use the `volatile` keyword. This informs the compiler, among other things, that the variable can be changed from other threads. The compiler will then avoid optimizing on the variable (for example, keeping track of the variable in registers), will not delay writes to it, and be careful accessing the variable only the number of times given in the source code.



For more information about the `volatile` type qualifier and the rules for accessing volatile objects, see *Declaring objects volatile*, page 317.

## ACCESSING SPECIAL FUNCTION REGISTERS

Specific header files for several ARM devices are included in the IAR product installation. The header files are named `iodevice.h` and define the processor-specific special function registers (SFRs).

**Note:** Each header file contains one section used by the compiler, and one section used by the assembler.

SFRs with bitfields are declared in the header file. This example is from `ioks32c5000a.h`:

```
__no_init volatile union
{
    unsigned short mwctl2;
    struct
    {
        unsigned short edr: 1;
        unsigned short edw: 1;
        unsigned short lee: 2;
        unsigned short lemd: 2;
        unsigned short lepl: 2;
    } mwctl2bit;
} @ 0x1000;

/* By including the appropriate include file in your code,
 * it is possible to access either the whole register or any
 * individual bit (or bitfields) from C code as follows.
 */

void Test()
{
    /* Whole register access */
    mwctl2 = 0x1234;

    /* Bitfield accesses */
    mwctl2bit.edw = 1;
    mwctl2bit.lepl = 3;
}
```

You can also use the header files as templates when you create new header files for other ARM devices.

## PASSING VALUES BETWEEN C AND ASSEMBLER OBJECTS

The following example shows how you in your C source code can use inline assembler to set and get values from a special purpose register:

```
static unsigned long get_APSR( void )
{
    unsigned long value;
    asm volatile( "MRS %0, APSR" : "=r"(value) );
    return value;
}

static void set_APSR( unsigned long value)
{
    asm volatile( "MSR APSR, %0" :: "r"(value) );
}
```

The general purpose register is used for getting and setting the value of the special purpose register APSR. The same method can be used also for accessing other special purpose registers and specific instructions.

To read more about inline assembler, see *Inline assembler*, page 142.

## NON-INITIALIZED VARIABLES

Normally, the runtime environment will initialize all global and static variables when the application is started.

The compiler supports the declaration of variables that will not be initialized, using the `__no_init` type modifier. They can be specified either as a keyword or using the `#pragma object_attribute` directive. The compiler places such variables in a separate segment.

For `__no_init`, the `const` keyword implies that an object is read-only, rather than that the object is stored in read-only memory. It is not possible to give a `__no_init` object an initial value.


Variables declared using the `__no_init` keyword could, for example, be large input buffers or mapped to special RAM that keeps its content even when the application is turned off.


For more information, see *\_\_no\_init*, page 326. Note that to use this keyword, language extensions must be enabled; see *-e*, page 247. For more information, see also *object\_attribute*, page 345.

# Part 2. Reference information

This part of the *IAR C/C++ Development Guide for ARM* contains these chapters:

- External interface details
- Compiler options
- Linker options
- Data representation
- Extended keywords
- Pragma directives
- Intrinsic functions
- The preprocessor
- Library functions
- The linker configuration file
- Section reference
- The stack usage control file
- IAR utilities
- Implementation-defined behavior for Standard C
- Implementation-defined behavior for C89.

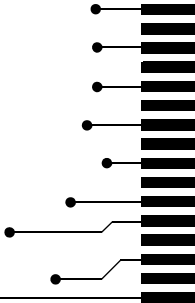



# External interface details

- Invocation syntax
- Include file search procedure
- Compiler output
- ILINK output
- Diagnostics

---

## Invocation syntax

You can use the compiler and linker either from the IDE or from the command line. See the *IDE Project Management and Building Guide for ARM* for information about using the build tools from the IDE.

### COMPILER INVOCATION SYNTAX

The invocation syntax for the compiler is:

```
iccarm [options] [sourcefile] [options]
```

For example, when compiling the source file `prog.c`, use this command to generate an object file with debug information:

```
iccarm prog.c --debug
```

The source file can be a C or C++ file, typically with the filename extension `c` or `cpp`, respectively. If no filename extension is specified, the file to be compiled must have the extension `c`.

Generally, the order of options on the command line, both relative to each other and to the source filename, is not significant. There is, however, one exception: when you use the `-I` option, the directories are searched in the same order as they are specified on the command line.

If you run the compiler from the command line without any arguments, the compiler version number and all available options including brief descriptions are directed to `stdout` and displayed on the screen.

## ILINK INVOCATION SYNTAX

The invocation syntax for ILINK is:

```
ilinkarm [arguments]
```

Each argument is either a command-line option, an object file, or a library.

For example, when linking the object file `prog.o`, use this command:

```
ilinkarm prog.o --config configfile
```

If no filename extension is specified for the linker configuration file, the configuration file must have the extension `icf`.

Generally, the order of arguments on the command line is not significant. There is, however, one exception: when you supply several libraries, the libraries are searched in the same order that they are specified on the command line. The default libraries are always searched last.

The output executable image will be placed in a file named `a.out`, unless the `-o` option is used.

If you run ILINK from the command line without any arguments, the ILINK version number and all available options including brief descriptions are directed to `stdout` and displayed on the screen.

## PASSING OPTIONS

There are three different ways of passing options to the compiler and to ILINK:

- Directly from the command line
  - Specify the options on the command line after the `iccarm` or `ilinkarm` commands; see *Invocation syntax*, page 221.
- Via environment variables
  - The compiler and linker automatically append the value of the environment variables to every command line; see *Environment variables*, page 223.
- Via a text file, using the `-f` option; see *-f*, page 250.

For general guidelines for the option syntax, an options summary, and a detailed description of each option, see the chapter *Compiler options*.

## ENVIRONMENT VARIABLES

These environment variables can be used with the compiler:

Environment variable	Description
C_INCLUDE	Specifies directories to search for include files; for example: C_INCLUDE=c:\program files\iar systems\embedded workbench 7.n\arm\inc;c:\headers
QCCARM	Specifies command line options; for example: QCCARM=-lA asm.lst

Table 27: Compiler environment variables

This environment variable can be used with ILINK:

Environment variable	Description
ILINKARM_CMD_LINE	Specifies command line options; for example: ILINKARM_CMD_LINE=--config full.icf --silent

Table 28: ILINK environment variables

## Include file search procedure

This is a detailed description of the compiler's #include file search procedure:

- If the name of the #include file is an absolute path specified in angle brackets or double quotes, that file is opened.
- If the compiler encounters the name of an #include file in angle brackets, such as:
 

```
#include <stdio.h>
```

 it searches these directories for the file to include:
  - 1 The directories specified with the `-I` option, in the order that they were specified, see *-I*, page 252.
  - 2 The directories specified using the `C_INCLUDE` environment variable, if any; see *Environment variables*, page 223.
  - 3 The automatically set up library system include directories. See *--dlib\_config*, page 246.
- If the compiler encounters the name of an #include file in double quotes, for example:
 

```
#include "vars.h"
```

 it searches the directory of the source file in which the #include statement occurs, and then performs the same sequence as for angle-bracketed filenames.

If there are nested `#include` files, the compiler starts searching the directory of the file that was last included, iterating upwards for each included file, searching the source file directory last. For example:

```
src.c in directory dir\src
#include "src.h"
...
src.h in directory dir\include
#include "config.h"
...
```

When `dir\exe` is the current directory, use this command for compilation:

```
iccarm ..\src\src.c -I..\include -I..\debugconfig
```

Then the following directories are searched in the order listed below for the file `config.h`, which in this example is located in the `dir\debugconfig` directory:

<code>dir\include</code>	Current file is <code>src.h</code> .
<code>dir\src</code>	File including current file ( <code>src.c</code> ).
<code>dir\include</code>	As specified with the first <code>-I</code> option.
<code>dir\debugconfig</code>	As specified with the second <code>-I</code> option.

Use angle brackets for standard header files, like `stdio.h`, and double quotes for files that are part of your application.

**Note:** Both `\` and `/` can be used as directory delimiters.

For information about the syntax for including header files, see *Overview of the preprocessor*, page 391.

## Compiler output

The compiler can produce the following output:

- A linkable object file
 

The object files produced by the compiler use the industry-standard format ELF. By default, the object file has the filename extension `.o`.
- Optional list files
 

Various kinds of list files can be specified using the compiler option `-l`, see `-l`, page 253. By default, these files will have the filename extension `lst`.
- Optional preprocessor output files
 

A preprocessor output file is produced when you use the `--preprocess` option; by default, the file will have the filename extension `.i`.



- Diagnostic messages

Diagnostic messages are directed to the standard error stream and displayed on the screen, and printed in an optional list file. For more information about diagnostic messages, see *Diagnostics*, page 226.

- Error return codes

These codes provide status information to the operating system which can be tested in a batch file, see *Error return codes*, page 225.

- Size information

Information about the generated amount of bytes for functions and data for each memory is directed to the standard output stream and displayed on the screen. Some of the bytes might be reported as *shared*.

Shared objects are functions or data objects that are shared between modules. If any of these occur in more than one module, only one copy is retained. For example, in some cases inline functions are not inlined, which means that they are marked as shared, because only one instance of each function will be included in the final application. This mechanism is sometimes also used for compiler-generated code or data not directly associated with a particular function or variable, and when only one instance is required in the final application.

## ERROR RETURN CODES

The compiler and linker return status information to the operating system that can be tested in a batch file.

These command line error codes are supported:

Code	Description
0	Compilation or linking successful, but there might have been warnings.
1	Warnings were produced and the option <code>--warnings_affect_exit_code</code> was used.
2	Errors occurred.
3	Fatal errors occurred, making the tool abort.
4	Internal errors occurred, making the tool abort.

Table 29: Error return codes

---

## ILINK output

ILINK can produce the following output:

- An absolute executable image

The final output produced by the IAR ILINK Linker is an absolute object file containing the executable image that can be put into an EPROM, downloaded to a hardware emulator, or executed on your PC using the IAR C-SPY Debugger Simulator. By default, the file has the filename extension `out`. The output format is always in ELF, which optionally includes debug information in the DWARF format.

- Optional logging information

During operation, ILINK logs its decisions on `stdout`, and optionally to a file. For example, if a library is searched, whether a required symbol is found in a library module, or whether a module will be part of the output. Timing information for each ILINK subsystem is also logged.

- Optional map files

A linker map file—containing summaries of linkage, runtime attributes, memory, and placement, as well as an entry list—can be generated by the ILINK option `--map`, see `--map`, page 291. By default, the map file has the filename extension `map`.

- Diagnostic messages

Diagnostic messages are directed to `stderr` and displayed on the screen, as well as printed in the optional map file. For more information about diagnostic messages, see *Diagnostics*, page 226.

- Error return codes

ILINK returns status information to the operating system which can be tested in a batch file, see *Error return codes*, page 225.

- Size information about used memory and amount of time

Information about the generated amount of bytes for functions and data for each memory is directed to `stdout` and displayed on the screen.

---

## Diagnostics

This section describes the format of the diagnostic messages and explains how diagnostic messages are divided into different levels of severity.

### MESSAGE FORMAT FOR THE COMPILER

All diagnostic messages are issued as complete, self-explanatory messages. A typical diagnostic message from the compiler is produced in the form:

```
filename,linenumber level[tag]: message
```

with these elements:

<i>filename</i>	The name of the source file in which the issue was encountered
<i>linenumber</i>	The line number at which the compiler detected the issue
<i>level</i>	The level of seriousness of the issue
<i>tag</i>	A unique tag that identifies the diagnostic message
<i>message</i>	An explanation, possibly several lines long

Diagnostic messages are displayed on the screen, as well as printed in the optional list file.

Use the option `--diagnostics_tables` to list all possible compiler diagnostic messages.

## MESSAGE FORMAT FOR THE LINKER

All diagnostic messages are issued as complete, self-explanatory messages. A typical diagnostic message from ILINK is produced in the form:

```
level[tag]: message
```

with these elements:

<i>level</i>	The level of seriousness of the issue
<i>tag</i>	A unique tag that identifies the diagnostic message
<i>message</i>	An explanation, possibly several lines long

Diagnostic messages are displayed on the screen, as well as printed in the optional map file.

Use the option `--diagnostics_tables` to list all possible linker diagnostic messages.

## SEVERITY LEVELS

The diagnostic messages are divided into different levels of severity:

### Remark

A diagnostic message that is produced when the compiler or linker finds a construct that can possibly lead to erroneous behavior in the generated code. Remarks are by default not issued, but can be enabled, see `--remarks`, page 267.

### Warning

A diagnostic message that is produced when the compiler or linker finds a potential problem which is of concern, but which does not prevent completion of the compilation or linking. Warnings can be disabled by use of the command line option `--no_warnings`, see `--no_warnings`, page 263.

### Error

A diagnostic message that is produced when the compiler or linker finds a serious error. An error will produce a non-zero exit code.

### Fatal error

A diagnostic message that is produced when the compiler finds a condition that not only prevents code generation, but which makes further processing pointless. After the message is issued, compilation terminates. A fatal error will produce a non-zero exit code.

## SETTING THE SEVERITY LEVEL

The diagnostic messages can be suppressed or the severity level can be changed for all diagnostics messages, except for fatal errors and some of the regular errors.

See the chapter *Compiler options*, for information about the compiler options that are available for setting severity levels.

For the compiler see also the chapter *Pragma directives*, for information about the pragma directives that are available for setting severity levels.

## INTERNAL ERROR

An internal error is a diagnostic message that signals that there was a serious and unexpected failure due to a fault in the compiler or linker. It is produced using this form:

```
Internal error: message
```

where *message* is an explanatory message. If internal errors occur, they should be reported to your software distributor or IAR Systems Technical Support. Include enough information to reproduce the problem, typically:

- The product name
- The version number of the compiler or of ILINK, which can be seen in the header of the list or map files generated by the compiler or by ILINK, respectively
- Your license number
- The exact internal error message text
- The files involved of the application that generated the internal error

- A list of the options that were used when the internal error occurred.



# Compiler options

- Options syntax
- Summary of compiler options
- Descriptions of compiler options

---

## Options syntax

Compiler options are parameters you can specify to change the default behavior of the compiler. You can specify options from the command line—which is described in more detail in this section—and from within the IDE.



See the online help system for information about the compiler options available in the IDE and how to set them.

### TYPES OF OPTIONS

There are two *types of names* for command line options, *short* names and *long* names. Some options have both.

- A short option name consists of one character, and it can have parameters. You specify it with a single dash, for example `-e`
- A long option name consists of one or several words joined by underscores, and it can have parameters. You specify it with double dashes, for example `--char_is_signed`.

For information about the different methods for passing options, see *Passing options*, page 222.

### RULES FOR SPECIFYING PARAMETERS

There are some general syntax rules for specifying option parameters. First, the rules depending on whether the parameter is *optional* or *mandatory*, and whether the option has a short or a long name, are described. Then, the rules for specifying filenames and directories are listed. Finally, the remaining rules are listed.

#### Rules for optional parameters

For options with a short name and an optional parameter, any parameter should be specified without a preceding space, for example:

`-O` or `-Oh`

For options with a long name and an optional parameter, any parameter should be specified with a preceding equal sign (=), for example:

```
--misrac2004=n
```

### Rules for mandatory parameters

For options with a short name and a mandatory parameter, the parameter can be specified either with or without a preceding space, for example:

```
-I..\src or -I ..\src\
```

For options with a long name and a mandatory parameter, the parameter can be specified either with a preceding equal sign (=) or with a preceding space, for example:

```
--diagnostics_tables=MyDiagnostics.lst
```

or

```
--diagnostics_tables MyDiagnostics.lst
```

### Rules for options with both optional and mandatory parameters

For options taking both optional and mandatory parameters, the rules for specifying the parameters are:

- For short options, optional parameters are specified without a preceding space
- For long options, optional parameters are specified with a preceding equal sign (=)
- For short and long options, mandatory parameters are specified with a preceding space.

For example, a short option with an optional parameter followed by a mandatory parameter:

```
-lA MyList.lst
```

For example, a long option with an optional parameter followed by a mandatory parameter:

```
--preprocess=n PreprocOutput.lst
```

### Rules for specifying a filename or directory as parameters

These rules apply for options taking a filename or directory as parameters:

- Options that take a filename as a parameter can optionally take a file path. The path can be relative or absolute. For example, to generate a listing to the file `List.lst` in the directory `..\listings\`:

```
iccarm prog.c -l ..\listings\List.lst
```



- For options that take a filename as the destination for output, the parameter can be specified as a path without a specified filename. The compiler stores the output in that directory, in a file with an extension according to the option. The filename will be the same as the name of the compiled source file, unless a different name was specified with the option `-o`, in which case that name is used. For example:

```
iccarm prog.c -l ..\listings\
```

The produced list file will have the default name `..\listings\prog.lst`

- The *current directory* is specified with a period (`.`). For example:
- ```
iccarm prog.c -l .
```
- `/` can be used instead of `\` as the directory delimiter.
  - By specifying `-`, input files and output files can be redirected to the standard input and output stream, respectively. For example:

```
iccarm prog.c -l -
```

### Additional rules

These rules also apply:

- When an option takes a parameter, the parameter cannot start with a dash (`-`) followed by another character. Instead, you can prefix the parameter with two dashes; this example will create a list file called `-r`:

```
iccarm prog.c -l ---r
```

- For options that accept multiple arguments of the same type, the arguments can be provided as a comma-separated list (without a space), for example:

```
--diag_warning=Be0001,Be0002
```

Alternatively, the option can be repeated for each argument, for example:

```
--diag_warning=Be0001
```

```
--diag_warning=Be0002
```

---

## Summary of compiler options

This table summarizes the compiler command line options:

| Command line option            | Description                                                         |
|--------------------------------|---------------------------------------------------------------------|
| <code>--apcs</code>            | Specifies the calling convention                                    |
| <code>--aeabi</code>           | Enables AEABI-compliant code generation                             |
| <code>--align_sp_on_irq</code> | Generates code to align SP on entry to <code>__irq</code> functions |
| <code>--arm</code>             | Sets the default function mode to ARM                               |

Table 30: Compiler options summary

| Command line option                       | Description                                                                                                 |
|-------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <code>--c89</code>                        | Specifies the C89 dialect                                                                                   |
| <code>--char_is_signed</code>             | Treats <code>char</code> as signed                                                                          |
| <code>--char_is_unsigned</code>           | Treats <code>char</code> as unsigned                                                                        |
| <code>--cpu</code>                        | Specifies a processor variant                                                                               |
| <code>--cpu_mode</code>                   | Specifies the default CPU mode for functions                                                                |
| <code>--c++</code>                        | Specifies Standard C++                                                                                      |
| <code>-D</code>                           | Defines preprocessor symbols                                                                                |
| <code>--debug</code>                      | Generates debug information                                                                                 |
| <code>--dependencies</code>               | Lists file dependencies                                                                                     |
| <code>--diag_error</code>                 | Treats these as errors                                                                                      |
| <code>--diag_remark</code>                | Treats these as remarks                                                                                     |
| <code>--diag_suppress</code>              | Suppresses these diagnostics                                                                                |
| <code>--diag_warning</code>               | Treats these as warnings                                                                                    |
| <code>--diagnostics_tables</code>         | Lists all diagnostic messages                                                                               |
| <code>--discard_unused_publics</code>     | Discards unused public symbols                                                                              |
| <code>--dlib_config</code>                | Uses the system include files for the DLIB library and determines which configuration of the library to use |
| <code>-e</code>                           | Enables language extensions                                                                                 |
| <code>--ec++</code>                       | Specifies Embedded C++                                                                                      |
| <code>--eec++</code>                      | Specifies Extended Embedded C++                                                                             |
| <code>--enable_hardware_workaround</code> | Enables a specific hardware workaround                                                                      |
| <code>--enable_multibytes</code>          | Enables support for multibyte characters in source files                                                    |
| <code>--enable_restrict</code>            | Enables the Standard C keyword <code>restrict</code>                                                        |
| <code>--endian</code>                     | Specifies the byte order of the generated code and data                                                     |
| <code>--enum_is_int</code>                | Sets the minimum size on enumeration types                                                                  |
| <code>--error_limit</code>                | Specifies the allowed number of errors before compilation stops                                             |
| <code>-f</code>                           | Extends the command line                                                                                    |
| <code>--fpu</code>                        | Selects the type of floating-point unit                                                                     |

Table 30: Compiler options summary (Continued)

| Command line option                           | Description                                                                                                                                               |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--generate_entries_without_bonds</code> | Generates extra functions for use from non-instrumented code. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .                  |
| <code>--guard_calls</code>                    | Enables guards for function static variable initialization                                                                                                |
| <code>--header_context</code>                 | Lists all referred source files and header files                                                                                                          |
| <code>-I</code>                               | Specifies include file path                                                                                                                               |
| <code>--ignore_uninstrumented_pointers</code> | Disables checking of accesses via pointers from non-instrumented code. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .         |
| <code>--interwork</code>                      | Generates interworking code                                                                                                                               |
| <code>-l</code>                               | Creates a list file                                                                                                                                       |
| <code>--legacy</code>                         | Generates object code linkable with older tool chains                                                                                                     |
| <code>--lock_regs</code>                      | Prevents the compiler from using specified registers                                                                                                      |
| <code>--macro_positions_in_diagnostics</code> | Obtains positions inside macros in diagnostic messages                                                                                                    |
| <code>--make_all_definitions_weak</code>      | Turns all variable and function definitions into weak definitions.                                                                                        |
| <code>--mfc</code>                            | Enables multi-file compilation                                                                                                                            |
| <code>--misrac</code>                         | Enables error messages specific to MISRA-C:1998. This option is a synonym of <code>--misrac1998</code> and is only available for backwards compatibility. |
| <code>--misrac1998</code>                     | Enables error messages specific to MISRA-C:1998. See the <i>IAR Embedded Workbench® MISRA C:1998 Reference Guide</i> .                                    |
| <code>--misrac2004</code>                     | Enables error messages specific to MISRA-C:2004. See the <i>IAR Embedded Workbench® MISRA C:2004 Reference Guide</i> .                                    |
| <code>--misrac_verbose</code>                 | <i>IAR Embedded Workbench® MISRA C:1998 Reference Guide</i> or the <i>IAR Embedded Workbench® MISRA C:2004 Reference Guide</i> .                          |

Table 30: Compiler options summary (Continued)

| Command line option                       | Description                                                                                                    |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <code>--no_alignment_reduction</code>     | Disables alignment reduction for simple Thumb functions                                                        |
| <code>--no_clustering</code>              | Disables static clustering optimizations                                                                       |
| <code>--no_code_motion</code>             | Disables code motion optimization                                                                              |
| <code>--no_const_align</code>             | Disables the alignment optimization for constants.                                                             |
| <code>--no_cse</code>                     | Disables common subexpression elimination                                                                      |
| <code>--no_exceptions</code>              | Disables C++ exception support                                                                                 |
| <code>--no_fragments</code>               | Disables section fragment handling                                                                             |
| <code>--no_inline</code>                  | Disables function inlining                                                                                     |
| <code>--no_literal_pool</code>            | Generates code that should run from a memory region where it is not allowed to read data, only to execute code |
| <code>--no_loop_align</code>              | Disables the alignment of labels in loops                                                                      |
| <code>--no_mem_idioms</code>              | Makes the compiler not optimize certain memory access patterns                                                 |
| <code>--no_path_in_file_macros</code>     | Removes the path from the return value of the symbols <code>__FILE__</code> and <code>__BASE_FILE__</code>     |
| <code>--no_rtti</code>                    | Disables C++ RTTI support                                                                                      |
| <code>--no_rw_dynamic_init</code>         | Disables runtime initialization of static C variables.                                                         |
| <code>--no_scheduling</code>              | Disables the instruction scheduler                                                                             |
| <code>--no_size_constraints</code>        | Relaxes the normal restrictions for code size expansion when optimizing for speed.                             |
| <code>--no_static_destruction</code>      | Disables destruction of C++ static variables at program exit                                                   |
| <code>--no_system_include</code>          | Disables the automatic search for system include files                                                         |
| <code>--no_tbaa</code>                    | Disables type-based alias analysis                                                                             |
| <code>--no_typedefs_in_diagnostics</code> | Disables the use of typedef names in diagnostics                                                               |
| <code>--no_unaligned_access</code>        | Avoids unaligned accesses                                                                                      |
| <code>--no_unroll</code>                  | Disables loop unrolling                                                                                        |
| <code>--no_warnings</code>                | Disables all warnings                                                                                          |
| <code>--no_wrap_diagnostics</code>        | Disables wrapping of diagnostic messages                                                                       |
| <code>-O</code>                           | Sets the optimization level                                                                                    |
| <code>-o</code>                           | Sets the object filename. Alias for <code>--output</code> .                                                    |

Table 30: Compiler options summary (Continued)

| Command line option                                       | Description                                                                                                |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <code>--only_stdout</code>                                | Uses standard output only                                                                                  |
| <code>--output</code>                                     | Sets the object filename                                                                                   |
| <code>--predef_macros</code>                              | Lists the predefined symbols.                                                                              |
| <code>--preinclude</code>                                 | Includes an include file before reading the source file                                                    |
| <code>--preprocess</code>                                 | Generates preprocessor output                                                                              |
| <code>--public_equ</code>                                 | Defines a global named assembler label                                                                     |
| <code>-r</code>                                           | Generates debug information. Alias for <code>--debug</code> .                                              |
| <code>--relaxed_fp</code>                                 | Relaxes the rules for optimizing floating-point expressions                                                |
| <code>--remarks</code>                                    | Enables remarks                                                                                            |
| <code>--require_prototypes</code>                         | Verifies that functions are declared before they are defined                                               |
| <code>--ropi</code>                                       | Generates code that uses PC-relative references to address code and read-only data.                        |
| <code>--runtime_checking</code>                           | Enables runtime error checking. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> . |
| <code>--rwpi</code>                                       | Generates code that uses an offset from the static base register to address-writable data.                 |
| <code>--section</code>                                    | Changes a section name                                                                                     |
| <code>--separate_cluster_for_initialized_variables</code> | Separates initialized and non-initialized variables                                                        |
| <code>--silent</code>                                     | Sets silent operation                                                                                      |
| <code>--strict</code>                                     | Checks for strict compliance with Standard C/C++                                                           |
| <code>--system_include_dir</code>                         | Specifies the path for system include files                                                                |
| <code>--thumb</code>                                      | Sets default function mode to Thumb                                                                        |
| <code>--use_c++_inline</code>                             | Uses C++ inline semantics in C99                                                                           |
| <code>--use_unix_directory_separators</code>              | Uses / as directory separator in paths                                                                     |
| <code>--vectorize</code>                                  | Enables generation of NEON vector instructions                                                             |
| <code>--vla</code>                                        | Enables C99 VLA support                                                                                    |

Table 30: Compiler options summary (Continued)

| Command line option                      | Description                                                            |
|------------------------------------------|------------------------------------------------------------------------|
| <code>--warn_about_c_style_casts</code>  | Makes the compiler warn when C-style casts are used in C++ source code |
| <code>--warnings_affect_exit_code</code> | Warnings affect exit code                                              |
| <code>--warnings_are_errors</code>       | Warnings are treated as errors                                         |

Table 30: Compiler options summary (Continued)

## Descriptions of compiler options

The following section gives detailed reference information about each compiler option.



Note that if you use the options page **Extra Options** to specify specific command line options, the IDE does not perform an instant check for consistency problems like conflicting options, duplication of options, or use of irrelevant options.

### --aapcs

|             |                                                                   |                                                                                                                                                                                                |
|-------------|-------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>aapcs={std vfp}</code>                                      |                                                                                                                                                                                                |
| Parameters  | <code>std</code>                                                  | Processor registers are used for floating-point parameters and return values in function calls according to standard AAPCS. <code>std</code> is the default when the software FPU is selected. |
|             | <code>vfp</code>                                                  | VFP registers are used for floating-point parameters and return values. The generated code is not compatible with AEABI code. <code>vfp</code> is the default when a VFP unit is used.         |
| Description | Use this option to specify the floating-point calling convention. |                                                                                                                                                                                                |



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

### --aeabi

|             |                                                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--aeabi</code>                                                                                                                             |
| Description | Use this option to generate AEABI-compliant object code. Note that this option must be used together with the <code>--guard_calls</code> option. |
| See also    | <i>AEABI compliance</i> , page 196 and <i>--guard_calls</i> , page 251.                                                                          |



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --align\_sp\_on\_irq

|             |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--align_sp_on_irq</code>                                                                                                                                                                                                                                                                                                                                                                                   |
| Description | Use this option to align the stack pointer (SP) on entry to <code>__irq</code> declared functions.<br><br>This is especially useful for nested interrupts, where the interrupted code uses the same SP as the interrupt handler. This means that the stack might only have 4-byte alignment, instead of the 8-byte alignment required by AEABI (and some instructions generated by the compiler for some cores). |
| See also    | <code>__irq</code> , page 325.                                                                                                                                                                                                                                                                                                                                                                                   |



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --arm

|             |                                                                                                                                                                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--arm</code>                                                                                                                                                                                                                                   |
| Description | Use this option to set default function mode to ARM. This setting must be the same for all files included in a program, unless they are interworking.<br><br><b>Note:</b> This option has the same effect as the <code>--cpu_mode=arm</code> option. |
| See also    | <code>--interwork</code> , page 252 and <code>__interwork</code> , page 324.                                                                                                                                                                         |



**Project>Options>C/C++ Compiler>Code>Processor mode>Arm**

## --c89

|             |                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--c89</code>                                                                                                                                    |
| Description | Use this option to enable the C89 C dialect instead of Standard C.<br><br><b>Note:</b> This option is mandatory when the MISRA C checking is enabled. |
| See also    | <i>C language overview</i> , page 165.                                                                                                                |



**Project>Options>C/C++ Compiler>Language 1>C dialect>C89**

## **--char\_is\_signed**

Syntax

`--char_is_signed`

Description

By default, the compiler interprets the plain `char` type as unsigned. Use this option to make the compiler interpret the plain `char` type as signed instead. This can be useful when you, for example, want to maintain compatibility with another compiler.

**Note:** The runtime library is compiled without the `--char_is_signed` option and cannot be used with code that is compiled with this option.



**Project>Options>C/C++ Compiler>Language 2>Plain 'char' is**

## **--char\_is\_unsigned**

Syntax

`--char_is_unsigned`

Description

Use this option to make the compiler interpret the plain `char` type as unsigned. This is the default interpretation of the plain `char` type.



**Project>Options>C/C++ Compiler>Language 2>Plain 'char' is**

## **--cpu**

Syntax

`--cpu=core`

Parameters

`core` Specifies a specific processor variant

Description

Use this option to select the processor variant for which the code is to be generated. The default is ARM7TDMI. The following cores and processor macrocells are recognized:

|            |             |            |
|------------|-------------|------------|
| ARM7TDMI   | ARM1020E    | Cortex-M0  |
| ARM7TDMI-S | ARM1022E    | Cortex-M0+ |
| ARM710T    | ARM1026EJ-S | Cortex-M1  |



|            |                          |             |
|------------|--------------------------|-------------|
| ARM720T    | ARM1136J                 | Cortex-Ms1* |
| ARM740T    | ARM1136J-S               | Cortex-M3   |
| ARM7EJ-S   | ARM1136JF                | Cortex-M4   |
| ARM9TDMI   | ARM1136JF-S              | Cortex-M4F  |
| ARM920T    | ARM1176J                 | Cortex-M7   |
|            | (alias for ARM1176JZ)    |             |
| ARM922T    | ARM1176J-S               | Cortex-R4   |
|            | (alias for ARM1176JZ-S)  |             |
| ARM940T    | ARM1176JF                | Cortex-R4F  |
|            | (alias for ARM1176JZF)   |             |
| ARM9E      | ARM1176JF-S              | Cortex-R5   |
|            | (alias for ARM1176JZF-S) |             |
| ARM9E-S    | Cortex-A5                | Cortex-R5F  |
| ARM926EJ-S | Cortex-A5F               | Cortex-R7   |
| ARM966E-S  | Cortex-A7                | Cortex-R7F  |
| ARM968E-S  | Cortex-A8                | XScale      |
| ARM946E-S  | Cortex-A9                | XScale-IR7  |
| ARM10E     | Cortex-A15               |             |

\* Cortex-M1 with Operating System extension.

See also

*Processor variant*, page 55



**Project>Options>General Options>Target>Processor configuration**

## --cpu\_mode

Syntax

```
--cpu_mode={arm|a|thumb|t}
```

Parameters

|                  |                                                          |
|------------------|----------------------------------------------------------|
| arm, a (default) | Selects the arm mode as the default mode for functions   |
| thumb, t         | Selects the thumb mode as the default mode for functions |

**Description** Use this option to select the default mode for functions. This setting must be the same for all files included in a program, unless they are interworking.

**See also** `--interwork`, page 252 and `__interwork`, page 324.



**Project>Options>General Options>Target>Processor mode**

## **--c++**

**Syntax** `--c++`

**Description** By default, the language supported by the compiler is C. If you use Standard C++, you must use this option to set the language the compiler uses to C++.

**See also** `--ec++`, page 248, `--eec++`, page 248, and *Using C++*, page 175.



**Project>Options>C/C++ Compiler>Language 1>C++**

and

**Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++**

## **-D**

**Syntax** `-D symbol[=value]`

**Parameters**

|               |                                      |
|---------------|--------------------------------------|
| <i>symbol</i> | The name of the preprocessor symbol  |
| <i>value</i>  | The value of the preprocessor symbol |

**Description** Use this option to define a preprocessor symbol. If no value is specified, 1 is used. This option can be used one or more times on the command line.

The option `-D` has the same effect as a `#define` statement at the top of the source file:

```
-Dsymbol
```

is equivalent to:

```
#define symbol 1
```

To get the equivalence of:

```
#define FOO
```

specify the = sign but nothing after, for example:

```
-DFOO=
```



**Project>Options>C/C++ Compiler>Preprocessor>Defined symbols**

## --debug, -r

Syntax

```
--debug
-r
```

Description

Use the `--debug` or `-r` option to make the compiler include information in the object modules required by the IAR C-SPY® Debugger and other symbolic debuggers.

**Note:** Including debug information will make the object files larger than otherwise.



**Project>Options>C/C++ Compiler>Output>Generate debug information**

## --dependencies

Syntax

```
--dependencies [= [i|m]] {filename|directory}
```

Parameters

|                          |                               |
|--------------------------|-------------------------------|
| <code>i</code> (default) | Lists only the names of files |
| <code>m</code>           | Lists in makefile style       |

See also *Rules for specifying a filename or directory as parameters*, page 232.

Description

Use this option to make the compiler list the names of all source and header files opened for input into a file with the default filename extension `i`.

Example

If `--dependencies` or `--dependencies=i` is used, the name of each opened input file, including the full path, if available, is output on a separate line. For example:

```
c:\iar\product\include\stdio.h
d:\myproject\include\foo.h
```

If `--dependencies=m` is used, the output is in makefile style. For each input file, one line containing a makefile dependency rule is produced. Each line consists of the name of the object file, a colon, a space, and the name of an input file. For example:

```
foo.o: c:\iar\product\include\stdio.h
foo.o: d:\myproject\include\foo.h
```

An example of using `--dependencies` with a popular make utility, such as `gmake` (GNU make):

- 1 Set up the rule for compiling files to be something like:

```
%.o : %.c
        $(ICC) $(ICCFLAGS) $< --dependencies=m $*.d
```

That is, in addition to producing an object file, the command also produces a dependency file in makefile style (in this example, using the extension `.d`).

- 2 Include all the dependency files in the makefile using, for example:

```
-include $(sources:.c=.d)
```

Because of the dash (-) it works the first time, when the `.d` files do not yet exist.



This option is not available in the IDE.

## **--diag\_error**

Syntax

```
--diag_error=tag[, tag, ...]
```

Parameters

*tag*                                 The number of a diagnostic message, for example the message number `Pe117`

Description

Use this option to reclassify certain diagnostic messages as errors. An error indicates a violation of the C or C++ language rules, of such severity that object code will not be generated. The exit code will be non-zero. This option may be used more than once on the command line.



**Project>Options>C/C++ Compiler>Diagnostics>Treat these as errors**

## **--diag\_remark**

Syntax

```
--diag_remark=tag[, tag, ...]
```

Parameters

*tag*                                 The number of a diagnostic message, for example the message number `Pe117`

## Description

Use this option to reclassify certain diagnostic messages as remarks. A remark is the least severe type of diagnostic message and indicates a source code construction that may cause strange behavior in the generated code. This option may be used more than once on the command line.

**Note:** By default, remarks are not displayed; use the `--remarks` option to display them.



**Project>Options>C/C++ Compiler>Diagnostics>Treat these as remarks**

**--diag\_suppress**

## Syntax

```
--diag_suppress=tag[, tag, ...]
```

## Parameters

*tag*                      The number of a diagnostic message, for example the message number `Pe117`

## Description

Use this option to suppress certain diagnostic messages. These messages will not be displayed. This option may be used more than once on the command line.



**Project>Options>C/C++ Compiler>Diagnostics>Suppress these diagnostics**

**--diag\_warning**

## Syntax

```
--diag_warning=tag[, tag, ...]
```

## Parameters

*tag*                      The number of a diagnostic message, for example the message number `Pe826`


## Description

Use this option to reclassify certain diagnostic messages as warnings. A warning indicates an error or omission that is of concern, but which will not cause the compiler to stop before compilation is completed. This option may be used more than once on the command line.




**Project>Options>C/C++ Compiler>Diagnostics>Treat these as warnings**

## --diagnostics\_tables



|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--diagnostics_tables {filename directory}</code>                                                                                                                                                                                                                                                                                                                                                                                                |
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                                                                                                                                                                                                                     |
| Description | Use this option to list all possible diagnostic messages in a named file. This can be convenient, for example, if you have used a pragma directive to suppress or change the severity level of any diagnostic messages, but forgot to document why.<br><br>This option cannot be given together with other options.<br><br> This option is not available in the IDE. |

## --discard\_unused\_publics

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--discard_unused_publics</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Description | Use this option to discard unused public functions and variables when compiling with the <code>--mfc</code> compiler option.<br><br><b>Note:</b> Do not use this option only on parts of the application, as necessary symbols might be removed from the generated output. Use the object attribute <code>__root</code> to keep symbols that are used from outside the compilation unit, for example interrupt handlers. If the symbol does not have the <code>__root</code> attribute and is defined in the library, the library definition will be used instead. |
| See also    | <code>--mfc</code> , page 255 and <i>Multi-file compilation units</i> , page 209.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|             |  <b>Project&gt;Options&gt;C/C++ Compiler&gt;Discard unused publics</b>                                                                                                                                                                                                                                                                                                                                                                                                          |

## --dlib\_config

|            |                                                                                                                                     |
|------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Syntax     | <code>--dlib_config filename.h config</code>                                                                                        |
| Parameters | <i>filename</i> A DLIB configuration header file, see <i>Rules for specifying a filename or directory as parameters</i> , page 232. |

|             |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <code>config</code> | <p>The default configuration file for the specified configuration will be used. Choose between:</p> <p><code>none</code>, no configuration will be used</p> <p><code>normal</code>, the normal library configuration will be used (default)</p> <p><code>full</code>, the full library configuration will be used.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Description |                     | <p>Use this option to specify which library configuration to use, either by specifying an explicit file or by specifying a library configuration—in which case the default file for that library configuration will be used. Make sure that you specify a configuration that corresponds to the library you are using. If you do not specify this option, the default library configuration file will be used.</p> <p>All prebuilt runtime libraries are delivered with corresponding configuration files. You can find the library object files and the library configuration files in the directory <code>arm\lib</code>. For examples and information about prebuilt runtime libraries, see <i>Using prebuilt libraries</i>, page 105.</p> <p>If you build your own customized runtime library, you should also create a corresponding customized library configuration file, which must be specified to the compiler. For more information, see <i>Building and using a customized library</i>, page 115.</p> <p> To set related options, choose:</p> <p><b>Project&gt;Options&gt;General Options&gt;Library Configuration</b></p> |
| <b>-e</b>   |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Syntax      | <code>-e</code>     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description |                     | <p>In the command line version of the compiler, language extensions are disabled by default. If you use language extensions such as extended keywords and anonymous structs and unions in your source code, you must use this option to enable them.</p> <p><b>Note:</b> The <code>-e</code> option and the <code>--strict</code> option cannot be used at the same time.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| See also    |                     | <p><i>Enabling language extensions</i>, page 167.</p> <p> <b>Project&gt;Options&gt;C/C++ Compiler&gt;Language 1&gt;Standard with IAR extensions</b></p> <p><b>Note:</b> By default, this option is selected in the IDE.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## **--ec++**

Syntax `--ec++`

Description In the compiler, the default language is C. If you use Embedded C++, you must use this option to set the language the compiler uses to Embedded C++.



**Project>Options>C/C++ Compiler>Language 1>C++**

and

**Project>Options>C/C++ Compiler>Language 1>C++ dialect>Embedded C++**

## **--eec++**

Syntax `--eec++`

Description In the compiler, the default language is C. If you take advantage of Extended Embedded C++ features like namespaces or the standard template library in your source code, you must use this option to set the language the compiler uses to Extended Embedded C++.

See also *Extended Embedded C++*, page 176.



**Project>Options>C/C++ Compiler>Language 1>C++**

and

**Project>Options>C/C++ Compiler>Language 1>C++ dialect>Extended Embedded C++**

## **--enable\_hardware\_workaround**

Syntax `--enable_hardware_workaround=waid[,waid...]`

Parameters *waid* The ID number of the workaround to enable. For a list of available workarounds to enable, see the release notes.

Description Use this option to make the compiler generate a workaround for a specific hardware problem.

See also The release notes for the compiler for a list of available parameters.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.



## --enable\_multibytes

Syntax `--enable_multibytes`

Description By default, multibyte characters cannot be used in C or C++ source code. Use this option to make multibyte characters in the source code be interpreted according to the host computer's default setting for multibyte support.

Multibyte characters are allowed in C and C++ style comments, in string literals, and in character constants. They are transferred untouched to the generated code.



**Project>Options>C/C++ Compiler>Language 2>Enable multibyte support**

## --enable\_restrict

Syntax `--enable_restrict`

Description Enables the Standard C keyword `restrict`. This option can be useful for improving analysis precision during optimization.



To set this option, use **Project>Options>C/C++ Compiler>Extra options**

## --endian

Syntax `--endian=`

Parameters

|                                  |                                                   |
|----------------------------------|---------------------------------------------------|
| <code>big, b</code>              | Specifies big-endian as the default byte order    |
| <code>little, l (default)</code> | Specifies little-endian as the default byte order |

Description Use this option to specify the byte order of the generated code and data. By default, the compiler generates code in little-endian byte order.

See also *Byte order*, page 306.



**Project>Options>General Options>Target>Endian mode**

## --enum\_is\_int

Syntax `--enum_is_int`

Description Use this option to force the size of all enumeration types to be at least 4 bytes.

**Note:** This option will not consider the fact that an `enum` type can be larger than an integer type.

See also *The enum type*, page 307.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --error\_limit

Syntax `--error_limit=n`

Parameters

*n* The number of errors before the compiler stops the compilation. *n* must be a positive integer; 0 indicates no limit.

Description Use the `--error_limit` option to specify the number of errors allowed before the compiler stops the compilation. By default, 100 errors are allowed.



This option is not available in the IDE.

## -f

Syntax `-f filename`

Parameters

See *Rules for specifying a filename or directory as parameters*, page 232.

Description

Use this option to make the compiler read command line options from the named file, with the default filename extension `xc1`.


In the command file, you format the items exactly as if they were on the command line itself, except that you may use multiple lines, because the newline character acts just as a space or tab character.

Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --fpu

|             |                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--fpu={VFPv2 VFPv3 VFPv3_d16 VFPv4 VFPv4_sp VFP9-S none}</code>                                                                                                                                                                                                   |                                                                                                                                                                                                         |
| Parameters  |                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                         |
|             | VFPv2                                                                                                                                                                                                                                                                   | For a system that implements a VFP unit conforming to the architecture VFPv2.                                                                                                                           |
|             | VFPv3                                                                                                                                                                                                                                                                   | For a system that implements a VFP unit conforming to the architecture VFPv3.                                                                                                                           |
|             | VFPv3_d16                                                                                                                                                                                                                                                               | For a system that implements a VFP unit conforming to the D16 variant of the architecture VFPv3.                                                                                                        |
|             | VFPv4                                                                                                                                                                                                                                                                   | For a system that implements a VFP unit conforming to the architecture VFPv4.                                                                                                                           |
|             | VFPv4_sp                                                                                                                                                                                                                                                                | For a system that implements a VFP unit conforming to the single-precision variant of the architecture VFPv4.                                                                                           |
|             | VFP9-S                                                                                                                                                                                                                                                                  | VFP9-S is an implementation of the VFPv2 architecture that can be used with the ARM9E family of CPU cores. Selecting the VFP9-S coprocessor is therefore identical to selecting the VFPv2 architecture. |
|             | none (default)                                                                                                                                                                                                                                                          | The software floating-point library is used.                                                                                                                                                            |
| Description | Use this option to generate code that performs floating-point operations using a Vector Floating Point (VFP) coprocessor. By selecting a VFP coprocessor, you will override the use of the software floating-point library for all supported floating-point operations. |                                                                                                                                                                                                         |
| See also    | <i>VFP and floating-point arithmetic</i> , page 55.                                                                                                                                                                                                                     |                                                                                                                                                                                                         |
|             |                                                                                                                                                                                      | <b>Project&gt;Options&gt;General Options&gt;Target&gt;FPU</b>                                                                                                                                           |

## --guard\_calls

|        |                            |
|--------|----------------------------|
| Syntax | <code>--guard_calls</code> |
|--------|----------------------------|

**Description** Use this option to enable guards for function static variable initialization. This option should be used in a threaded C++ environment.

**See also** *Managing a multithreaded environment*, page 133.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --header\_context

**Syntax** `--header_context`

**Description** Occasionally, to find the cause of a problem it is necessary to know which header file that was included from which source line. Use this option to list, for each diagnostic message, not only the source position of the problem, but also the entire include stack at that point.



This option is not available in the IDE.

## -I

**Syntax** `-I path`

**Parameters** `path` The search path for `#include` files

**Description** Use this option to specify the search paths for `#include` files. This option can be used more than once on the command line.

**See also** *Include file search procedure*, page 223.



**Project>Options>C/C++ Compiler>Preprocessor>Additional include directories**

## --interwork

**Syntax** `--interwork`

**Description** Use this option to generate interworking code.

In code compiled with this option, functions will by default be of the type `interwork`. It will be possible to mix files compiled as `arm` and `thumb` (using the `--cpu_mode` option) as long as they are all compiled with the `--interwork` option.

**Note:** Source code compiled for an ARM architecture v5 or higher, or for AEABI compliance, is interworking by default.

See also

`--interwork`, page 324.



**Project>Options>General Options>Target>Generate interwork code**

**-l**

Syntax

```
-l [a|A|b|B|c|C|D] [N] [H] {filename|directory}
```

Parameters

|             |                                                                                                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a (default) | Assembler list file                                                                                                                                                                                                                                     |
| A           | Assembler list file with C or C++ source as comments                                                                                                                                                                                                    |
| b           | Basic assembler list file. This file has the same contents as a list file produced with <code>-la</code> , except that no extra compiler-generated information (runtime model attributes, call frame information, frame size information) is included * |
| B           | Basic assembler list file. This file has the same contents as a list file produced with <code>-lA</code> , except that no extra compiler-generated information (runtime model attributes, call frame information, frame size information) is included * |
| c           | C or C++ list file                                                                                                                                                                                                                                      |
| C (default) | C or C++ list file with assembler source as comments                                                                                                                                                                                                    |
| D           | C or C++ list file with assembler source as comments, but without instruction offsets and hexadecimal byte values                                                                                                                                       |
| N           | No diagnostics in file                                                                                                                                                                                                                                  |
| H           | Include source lines from header files in output. Without this option, only source lines from the primary source file are included                                                                                                                      |

\* This makes the list file less useful as input to the assembler, but more useful for reading by a human.

See also *Rules for specifying a filename or directory as parameters*, page 232.

**Description** Use this option to generate an assembler or C/C++ listing to a file. Note that this option can be used one or more times on the command line.



To set related options, choose:

**Project>Options>C/C++ Compiler>List**

## --legacy

**Syntax** `--legacy={RVCT3.0}`

**Parameters** `RVCT3.0` Generates object code linkable with the linker in RVCT3.0. Use this mode together with the `--aeabi` option to generate code that should be linked with the linker in RVCT3.0.

**Description** Use this option to generate code compatible with the specified toolchain.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --lock\_regs

**Syntax** `--lock_regs=register`

**Parameters** `registers` A comma-separated list of register names and register intervals to be locked, in the range R4–R11.

**Description** Use this option to prevent the compiler from generating code that uses the specified registers.

**Example**  
`--lock_regs=R4`  
`--lock_regs=R8–R11`  
`--lock_regs=R4,R8–R11`



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --macro\_positions\_in\_diagnostics

**Syntax** `--macro_positions_in_diagnostics`

**Description** Use this option to obtain position references inside macros in diagnostic messages. This is useful for detecting incorrect source code constructs in macros.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --make\_all\_definitions\_weak

**Syntax** `--make_all_definitions_weak`

**Description** Turns all variable and function definitions in the compilation unit into weak definitions.

**Note:** Normally, it is better to use extended keywords or pragma directives to turn individual variable and function definitions into weak definitions.

**See also** `__weak`, page 331.



This option is not available in the IDE.

## --mfc

**Syntax** `--mfc`

**Description** Use this option to enable *multi-file compilation*. This means that the compiler compiles one or several source files specified on the command line as one unit, which enhances interprocedural optimizations.

**Note:** The compiler will generate one object file per input source code file, where the first object file contains all relevant data and the other ones are empty. If you want only the first file to be produced, use the `-o` compiler option and specify a certain output file.

**Example** `iccarm myfile1.c myfile2.c myfile3.c --mfc`

**See also** `--discard_unused_publics`, page 246, `--output`, `-o`, page 264, and *Multi-file compilation units*, page 209.



**Project>Options>C/C++ Compiler>Multi-file compilation**

## --no\_alignment\_reduction

**Syntax** `--no_alignment_reduction`

**Description** Some simple Thumb/Thumb2 functions can be 2-byte aligned. Use this option to keep those functions 4-byte aligned.

This option has no effect when compiling for ARM mode.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## **--no\_clustering**

**Syntax** `--no_clustering`

**Description** Use this option to disable static clustering optimizations.

**Note:** This option has no effect at optimization.

**See also** *Static clustering*, page 213.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Static clustering**

## **--no\_code\_motion**

**Syntax** `--no_code_motion`

**Description** Use this option to disable code motion optimizations.

**Note:** This option has no effect at optimization levels below Medium.

**See also** *Code motion*, page 212.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Code motion**

## **--no\_const\_align**

**Syntax** `--no_const_align`

**Description** By default, the compiler uses alignment 4 for objects with a size of 4 bytes or more. Use this option to make the compiler align `const` objects based on the alignment of their type.



For example, a string literal will get alignment 1, because it is an array with elements of the type `const char` which has alignment 1. Using this option might save ROM space, possibly at the expense of processing speed.

See also

*Alignment*, page 305.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --no\_cse

Syntax

`--no_cse`

Description

Use this option to disable common subexpression elimination.

**Note:** This option has no effect at optimization levels below Medium.

See also

*Common subexpression elimination*, page 211.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Common subexpression elimination**

## --no\_exceptions

Syntax

`--no_exceptions`

Description

Use this option to disable exception support in the C++ language. Exception statements like `throw` and `try-catch`, and exception specifications on function definitions will generate an error message. Exception specifications on function declarations are ignored. The option is only valid when used together with the `--c++` compiler option.

If exceptions are not used in your application, it is recommended to disable support for them by using this option, because exceptions cause a rather large increase in code size.

See also

*Exception handling*, page 178.



**Project>Options>C/C++ Compiler>Language 1>C++**  
and

**Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++>With exceptions**

## --no\_fragments

Syntax `--no_fragments`

Description Use this option to disable section fragment handling. Normally, the toolset uses IAR proprietary information for transferring section fragment information to the linker. The linker uses this information to remove unused code and data, and thus further minimize the size of the executable image. When you use this option, this information is not output in the object files.

See also *Keeping symbols and sections*, page 94.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**

## --no\_inline

Syntax `--no_inline`

Description Use this option to disable function inlining.

See also *Inlining functions*, page 71.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Function inlining**

## --no\_literal\_pool

Syntax `--no_literal_pool`

Description Use this option to generate code that should run from a memory region where it is not allowed to read data, only to execute code.

When this option is used, the compiler will construct addresses and large constants with the MOV32 pseudo instruction instead of using a literal pool: switch statements are no longer translated using tables, and constant data is placed in the `.rodata` section.

This option also affects the automatic library selection performed by the linker. An IAR-specific ELF attribute is used for determining whether libraries compiled with this option should be used.

This option is only allowed for ARMv7-M cores, and cannot be combined with the options `--ropi` or `--rwpi`.

See also *--no\_literal\_pool*, page 294.



**Project>Options>C/C++ Compiler>Code>No data reads in code memory**

## --no\_loop\_align

Syntax `--no_loop_align`

Description Use this option to disable the 4-byte alignment of labels in loops. This option is only useful in Thumb2 mode.

In ARM/Thumb1 mode, this option is enabled but does not perform anything.

See also *Alignment*, page 305



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --no\_mem\_idioms

Syntax `--no_mem_idioms`

Description Use this option to make the compiler not optimize code sequences that clear, set, or copy a memory region. These memory access patterns (idioms) can otherwise be aggressively optimized, in some cases using calls to the runtime library. In principle, the transformation can involve more than a library call.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --no\_path\_in\_file\_macros

Syntax `--no_path_in_file_macros`

Description Use this option to exclude the path from the return value of the predefined preprocessor symbols `__FILE__` and `__BASE_FILE__`.

See also *Description of predefined preprocessor symbols*, page 392.



This option is not available in the IDE.

## **--no\_rtti**

Syntax `--no_rtti`

Description Use this option to disable the runtime type information (RTTI) support in the C++ language. RTTI statements like `dynamic_cast` and `typeid` will generate an error message. This option is only valid when used together with the `--c++` compiler option.

See also *Using C++*, page 175.



**Project>Options>C/C++ Compiler>Language 1>C++**

and

**Project>Options>C/C++ Compiler>Language 1>C++ dialect>C++>With RTTI**

## **--no\_rw\_dynamic\_init**

Syntax `--no_rw_dynamic_init`

Description Use this option to disable runtime initialization of static C variables. C source code that is compiled with `--ropi` or `--rwpi` cannot have static pointer variables and constants initialized to addresses of objects that do not have a known address at link time. To solve this for writable static variables, the compiler generates code that performs the initialization at program startup (in the same way as dynamic initialization in C++).

See also `--ropi`, page 268 and `--rwpi`, page 268.



**Project>Options>C/C++ Compiler>Code>No dynamic read/write/initialization**

## **--no\_scheduling**

Syntax `--no_scheduling`

Description Use this option to disable the instruction scheduler.

**Note:** This option has no effect at optimization levels below High.

See also *Instruction scheduling*, page 213.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Instruction scheduling**

## --no\_size\_constraints

|             |                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--no_size_constraints</code>                                                                                                                                                          |
| Description | Use this option to relax the normal restrictions for code size expansion when optimizing for high speed.<br><br><b>Note:</b> This option has no effect unless used with <code>-Ohs</code> . |
| See also    | <i>Speed versus size</i> , page 211.                                                                                                                                                        |



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>No size constraints**

## --no\_static\_destruction

|             |                                                                                                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--no_static_destruction</code>                                                                                                                                                                                 |
| Description | Normally, the compiler emits code to destroy C++ static variables that require destruction at program exit. Sometimes, such destruction is not needed.<br><br>Use this option to suppress the emission of such code. |
| See also    | <i>Setting up the atexit limit</i> , page 95.                                                                                                                                                                        |



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --no\_system\_include

|             |                                                                                                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--no_system_include</code>                                                                                                                                                                                                                        |
| Description | By default, the compiler automatically locates the system include files. Use this option to disable the automatic search for system include files. In this case, you might need to set up the search path by using the <code>-I</code> compiler option. |
| See also    | <code>--dlib_config</code> , page 246, and <code>--system_include_dir</code> , page 270.                                                                                                                                                                |



**Project>Options>C/C++ Compiler>Preprocessor>Ignore standard include directories**

## --no\_tbaa

Syntax `--no_tbaa`

Description Use this option to disable type-based alias analysis.

**Note:** This option has no effect at optimization levels below High.

See also *Type-based alias analysis*, page 212.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Type-based alias analysis**

## --no\_typedefs\_in\_diagnostics

Syntax `--no_typedefs_in_diagnostics`

Description Use this option to disable the use of typedef names in diagnostics. Normally, when a type is mentioned in a message from the compiler, most commonly in a diagnostic message of some kind, the typedef names that were used in the original declaration are used whenever they make the resulting text shorter.

Example 

```
typedef int (*MyPtr)(char const *);
MyPtr p = "My text string";
```

will give an error message like this:

```
Error[Pe144]: a value of type "char *" cannot be used to
initialize an entity of type "MyPtr"
```

If the `--no_typedefs_in_diagnostics` option is used, the error message will be like this:

```
Error[Pe144]: a value of type "char *" cannot be used to
initialize an entity of type "int (*)(char const *)"
```



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --no\_unaligned\_access

Syntax `--no_unaligned_access`

Description Use this option to make the compiler avoid unaligned accesses. Data accesses are usually performed aligned for improved performance. However, some accesses, most

notably when reading from or writing to packed data structures, might be unaligned. When using this option, all such accesses will be performed using a smaller data size to avoid any unaligned accesses. This option is only useful for ARMv6 architectures and higher.

See also

*Alignment*, page 305.



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --no\_unroll

Syntax

--no\_unroll

Description

Use this option to disable loop unrolling.

**Note:** This option has no effect at optimization levels below High.

See also

*Loop unrolling*, page 211.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Loop unrolling**

## --no\_warnings

Syntax

--no\_warnings

Description

By default, the compiler issues warning messages. Use this option to disable all warning messages.



This option is not available in the IDE.

## --no\_wrap\_diagnostics

Syntax

--no\_wrap\_diagnostics

Description

By default, long lines in diagnostic messages are broken into several lines to make the message easier to read. Use this option to disable line wrapping of diagnostic messages.



This option is not available in the IDE.

## **-O**

Syntax `-O[n|l|m|h|hs|hz]`

### Parameters

|             |                                   |
|-------------|-----------------------------------|
| n           | <b>None* (Best debug support)</b> |
| l (default) | <b>Low*</b>                       |
| m           | Medium                            |
| h           | High, balanced                    |
| hs          | High, favoring speed              |
| hz          | High, favoring size               |

\*The most important difference between None and Low is that at None, all non-static variables will live during their entire scope.

### Description

Use this option to set the optimization level to be used by the compiler when optimizing the code. If no optimization option is specified, the optimization level is used by default. If only `-O` is used without any parameter, the optimization level High balanced is used.

A low level of optimization makes it relatively easy to follow the program flow in the debugger, and, conversely, a high level of optimization makes it relatively hard.

### See also

*Controlling compiler optimizations*, page 208.



**Project>Options>C/C++ Compiler>Optimizations**

## **--only\_stdout**

Syntax `--only_stdout`

### Description

Use this option to make the compiler use the standard output stream (`stdout`) also for messages that are normally directed to the error output stream (`stderr`).



This option is not available in the IDE.

## **--output, -o**

Syntax `--output {filename|directory}`  
`-o {filename|directory}`



|             |                                                                                                                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                              |
| Description | By default, the object code output produced by the compiler is located in a file with the same name as the source file, but with the extension <code>.o</code> . Use this option to explicitly specify a different output filename for the object code output. |



This option is not available in the IDE.

## --predef\_macros

|             |                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--predef_macros {filename directory}</code>                                                                                                                                                                                                                                                                                                                         |
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                                                                                                                                         |
| Description | Use this option to list the predefined symbols. When using this option, make sure to also use the same options as for the rest of your project.<br><br>If a filename is specified, the compiler stores the output in that file. If a directory is specified, the compiler stores the output in that directory, in a file with the <code>predef</code> filename extension. |

Note that this option requires that you specify a source file on the command line.



This option is not available in the IDE.

## --preinclude

|             |                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--preinclude includefile</code>                                                                                                                                                                                                                         |
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                             |
| Description | Use this option to make the compiler read the specified include file before it starts to read the source file. This is useful if you want to change something in the source code for the entire application, for instance if you want to define a new symbol. |



**Project>Options>C/C++ Compiler>Preprocessor>Preinclude file**

## --preprocess

|        |                                                            |
|--------|------------------------------------------------------------|
| Syntax | <code>--preprocess[=[c][n][l]] {filename directory}</code> |
|--------|------------------------------------------------------------|

Parameters

|   |                           |
|---|---------------------------|
| c | Preserve comments         |
| n | Preprocess only           |
| l | Generate #line directives |

See also *Rules for specifying a filename or directory as parameters*, page 232.

Description

Use this option to generate preprocessed output to a named file.



**Project>Options>C/C++ Compiler>Preprocessor>Preprocessor output to file**

## --public\_equ

Syntax

--public\_equ *symbol*[=*value*]

Parameters

|               |                                                   |
|---------------|---------------------------------------------------|
| <i>symbol</i> | The name of the assembler symbol to be defined    |
| <i>value</i>  | An optional value of the defined assembler symbol |

Description

This option is equivalent to defining a label in assembler language using the EQU directive and exporting it using the PUBLIC directive. This option can be used more than once on the command line.



This option is not available in the IDE.

## --relaxed\_fp

Syntax

--relaxed\_fp

Description

Use this option to allow the compiler to relax the language rules and perform more aggressive optimization of floating-point expressions. This option improves performance for floating-point expressions that fulfill these conditions:

- The expression consists of both single- and double-precision values
- The double-precision values can be converted to single precision without loss of accuracy
- The result of the expression is converted to single precision.

Note that performing the calculation in single precision instead of double precision might cause a loss of accuracy.

#### Example

```
float F(float a, float b)
{
    return a + b * 3.0;
}
```

The C standard states that `3.0` in this example has the type `double` and therefore the whole expression should be evaluated in `double` precision. However, when the `--relaxed_fp` option is used, `3.0` will be converted to `float` and the whole expression can be evaluated in `float` precision.



To set related options, choose:

**Project>Options>C/C++ Compiler>Language 2>Floating-point semantics**

## --remarks

#### Syntax

```
--remarks
```

#### Description

The least severe diagnostic messages are called remarks. A remark indicates a source code construct that may cause strange behavior in the generated code. By default, the compiler does not generate remarks. Use this option to make the compiler generate remarks.

#### See also

*Severity levels*, page 227.



**Project>Options>C/C++ Compiler>Diagnostics>Enable remarks**

## --require\_prototypes

#### Syntax

```
--require_prototypes
```

#### Description

Use this option to force the compiler to verify that all functions have proper prototypes. Using this option means that code containing any of the following will generate an error:

- A function call of a function with no declaration, or with a Kernighan & Ritchie C declaration
- A function definition of a public function with no previous prototype declaration
- An indirect function call through a function pointer with a type that does not include a prototype.



**Project>Options>C/C++ Compiler>Language 1>Require prototypes**

**--ropi**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | --ropi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description | <p>Use this option to make the compiler generate code that uses PC-relative references to address code and read-only data.</p> <p>When this option is used, these limitations apply:</p> <ul style="list-style-type: none"> <li>• C++ constructions cannot be used</li> <li>• The object attribute <code>__ramfunc</code> cannot be used</li> <li>• Pointer constants cannot be initialized with the address of another constant, a string literal, or a function. However, writable variables can be initialized to constant addresses at runtime.</li> </ul> |
| See also    | --no_rw_dynamic_init, page 260, and <i>Description of predefined preprocessor symbols</i> , page 392.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |



**Project>Options>C/C++ Compiler>Code>Code and read-only data (ropi)**

**--rwpi**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | --rwpi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description | <p>Use this option to make the compiler generate code that uses the offset from the static base register (R9) to address-writable data.</p> <p>When this option is used, these limitations apply:</p> <ul style="list-style-type: none"> <li>• The object attribute <code>__ramfunc</code> cannot be used</li> <li>• Pointer constants cannot be initialized with the address of a writable variable. However, static writable variables can be initialized to writable addresses at runtime.</li> </ul> |
| See also    | --no_rw_dynamic_init, page 260, and <i>Description of predefined preprocessor symbols</i> , page 392.                                                                                                                                                                                                                                                                                                                                                                                                    |



**Project>Options>C/C++ Compiler>Code>Read/write data (rwpi)**

## --section

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--section OldName=NewName</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description | <p>The compiler places functions and data objects into named sections which are referred to by the IAR ILINK Linker. Use this option to change the name of the section <i>OldName</i> to <i>NewName</i>.</p> <p>This is useful if you want to place your code or data in different address ranges and you find the @ notation, alternatively the #pragma location directive, insufficient. Note that any changes to the section names require corresponding modifications in the linker configuration file.</p> |
| Example     | <p>To place functions in the section MyText, use:</p> <pre>--section .text=MyText</pre>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| See also    | <i>Controlling data and function placement in memory</i> , page 204.                                                                                                                                                                                                                                                                                                                                                                                                                                            |



**Project>Options>C/C++ Compiler>Output>Code section name**


## --separate\_cluster\_for\_initialized\_variables

|             |                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--separate_cluster_for_initialized_variables</code>                                                                                                                                                                                                                                                                                                                                                       |
| Description | <p>Use this option to separate initialized and non-initialized variables when using variable clustering. This might reduce the number of bytes in the ROM area which are needed for data initialization, but it might lead to larger code.</p> <p>This option can be useful if you want to have your own data initialization routine, but want the IAR tools to arrange for the zero-initialized variables.</p> |
| See also    | <i>Manual initialization</i> , page 96 and <i>Initialize directive</i> , page 418.                                                                                                                                                                                                                                                                                                                              |




To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.


## --silent

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--silent</code>                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description | <p>By default, the compiler issues introductory messages and a final statistics report. Use this option to make the compiler operate without sending these messages to the standard output stream (normally the screen).</p> <p>This option does not affect the display of error and warning messages.</p> <p> This option is not available in the IDE.</p> |

## --strict

|             |                                                                                                                                                                                                                                                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--strict</code>                                                                                                                                                                                                                                                                                                    |
| Description | <p>By default, the compiler accepts a relaxed superset of Standard C and C++. Use this option to ensure that the source code of your application instead conforms to strict Standard C and C++.</p> <p><b>Note:</b> The <code>-e</code> option and the <code>--strict</code> option cannot be used at the same time.</p> |
| See also    | <p><i>Enabling language extensions</i>, page 167.</p> <p> <b>Project&gt;Options&gt;C/C++ Compiler&gt;Language 1&gt;Language conformance&gt;Strict</b></p>                                                                               |

## --system\_include\_dir

|             |                                                                                                                                                                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--system_include_dir path</code>                                                                                                                                                                                                                             |
| Parameters  | <p><i>path</i>                      The path to the system include files, see <i>Rules for specifying a filename or directory as parameters</i>, page 232.</p>                                                                                                     |
| Description | <p>By default, the compiler automatically locates the system include files. Use this option to explicitly specify a different path to the system include files. This might be useful if you have not installed IAR Embedded Workbench in the default location.</p> |
| See also    | <p><code>--dlib_config</code>, page 246, and <code>--no_system_include</code>, page 261.</p> <p> This option is not available in the IDE.</p>                                   |

## --thumb

|             |                                                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | --thumb                                                                                                                                                                                                                                                  |
| Description | Use this option to set default function mode to Thumb. This setting must be the same for all files included in a program, unless they are interworking.<br><br><b>Note:</b> This option has the same effect as the <code>--cpu_mode=thumb</code> option. |
| See also    | <code>--interwork</code> , page 252 and <code>__interwork</code> , page 324.                                                                                                                                                                             |



**Project>Options>C/C++ Compiler>Code>Processor mode>Thumb**

## --use\_c++\_inline

|             |                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | --use_c++_inline                                                                                                                                                |
| Description | Standard C uses slightly different semantics for the <code>inline</code> keyword than C++ does. Use this option if you want C++ semantics when you are using C. |
| See also    | <i>Inlining functions</i> , page 71                                                                                                                             |



**Project>Options>C/C++ Compiler>Language 1>C dialect>C99>C++ inline semantics**

## --use\_unix\_directory\_separators

|             |                                                                                                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | --use_unix_directory_separators                                                                                                                                                                                       |
| Description | Use this option to make DWARF debug information use / (instead of \) as directory separators in file paths.<br><br>This option can be useful if you have a debugger that requires directory separators in UNIX style. |



To set this option, use **Project>Options>C/C++ Compiler>Extra Options**.

## --vectorize

|        |             |
|--------|-------------|
| Syntax | --vectorize |
|--------|-------------|

**Description** Use this option to enable generation of NEON vector instructions.  
Loops will only be vectorized if the target processor has NEON capability and the optimization level is `-Ohs`.



**Project>Options>C/C++ Compiler>Optimizations>Enable transformations>Vectorize**

## **--vla**

**Syntax** `--vla`

**Description** Use this option to enable support for C99 variable length arrays. Such arrays are located on the heap. This option requires Standard C and cannot be used together with the `--c89` compiler option.

**Note:** `--vla` should not be used together with the `longjmp` library function, as that can lead to memory leakages.

**See also** *C language overview*, page 165.



**Project>Options>C/C++ Compiler>Language 1>C dialect>Allow VLA**

## **--warn\_about\_c\_style\_casts**

**Syntax** `--warn_about_c_style_casts`

**Description** Use this option to make the compiler warn when C-style casts are used in C++ source code.



This option is not available in the IDE.

## **--warnings\_affect\_exit\_code**

**Syntax** `--warnings_affect_exit_code`

**Description** By default, the exit code is not affected by warnings, because only errors produce a non-zero exit code. With this option, warnings will also generate a non-zero exit code.



This option is not available in the IDE.



## **--warnings\_are\_errors**

Syntax `--warnings_are_errors`

Description Use this option to make the compiler treat all warnings as errors. If the compiler encounters an error, no object code is generated. Warnings that have been changed into remarks are not treated as errors.

**Note:** Any diagnostic messages that have been reclassified as warnings by the option `--diag_warning` or the `#pragma diag_warning` directive will also be treated as errors when `--warnings_are_errors` is used.

See also `--diag_warning`, page 245.



**Project>Options>C/C++ Compiler>Diagnostics>Treat all warnings as errors**



# Linker options

- Summary of linker options
- Descriptions of linker options

For general syntax rules, see *Options syntax*, page 231.

---

## Summary of linker options

This table summarizes the linker options:

| Command line option              | Description                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <code>--advanced_heap</code>     | Uses an advanced heap                                                                                                     |
| <code>--basic_heap</code>        | Uses a basic heap                                                                                                         |
| <code>--BE8</code>               | Uses the big-endian format BE8                                                                                            |
| <code>--BE32</code>              | Uses the big-endian format BE32                                                                                           |
| <code>--bounds_table_size</code> | Specifies the size of the global bounds table. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> . |
| <code>--call_graph</code>        | Produces a call graph file in XML format                                                                                  |
| <code>--config</code>            | Specifies the linker configuration file to be used by the linker                                                          |
| <code>--config_def</code>        | Defines symbols for the configuration file                                                                                |
| <code>--cpp_init_routine</code>  | Specifies a user-defined C++ dynamic initialization routine                                                               |
| <code>--cpu</code>               | Specifies a processor variant                                                                                             |
| <code>--debug_heap</code>        | Uses the checked heap. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .                         |
| <code>--define_symbol</code>     | Defines symbols that can be used by the application                                                                       |
| <code>--dependencies</code>      | Lists file dependencies                                                                                                   |
| <code>--diag_error</code>        | Treats these message tags as errors                                                                                       |
| <code>--diag_remark</code>       | Treats these message tags as remarks                                                                                      |
| <code>--diag_suppress</code>     | Suppresses these diagnostic messages                                                                                      |

*Table 31: Linker options summary*

| Command line option                           | Description                                                                                                                                                         |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--diag_warning</code>                   | Treats these message tags as warnings                                                                                                                               |
| <code>--diagnostics_tables</code>             | Lists all diagnostic messages                                                                                                                                       |
| <code>--enable_hardware_workaround</code>     | Enables specified hardware workaround                                                                                                                               |
| <code>--enable_stack_usage</code>             | Enables stack usage analysis                                                                                                                                        |
| <code>--entry</code>                          | Treats the symbol as a root symbol and as the start of the application                                                                                              |
| <code>--error_limit</code>                    | Specifies the allowed number of errors before linking stops                                                                                                         |
| <code>--exception_tables</code>               | Generates exception tables for C code                                                                                                                               |
| <code>--export_built_in_config</code>         | Produces an <code>icf</code> file for the default configuration                                                                                                     |
| <code>--extra_init</code>                     | Specifies an extra initialization routine that will be called if it is defined.                                                                                     |
| <code>-f</code>                               | Extends the command line                                                                                                                                            |
| <code>--force_exceptions</code>               | Always includes exception runtime code                                                                                                                              |
| <code>--force_output</code>                   | Produces an output file even if errors occurred                                                                                                                     |
| <code>--ignore_uninstrumented_pointers</code> | Disables checking of accessing via pointers in memory for which no bounds have been set. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> . |
| <code>--image_input</code>                    | Puts an image file in a section                                                                                                                                     |
| <code>--inline</code>                         | Inlines small routines                                                                                                                                              |
| <code>--keep</code>                           | Forces a symbol to be included in the application                                                                                                                   |
| <code>--log</code>                            | Enables log output for selected topics                                                                                                                              |
| <code>--log_file</code>                       | Directs the log to a file                                                                                                                                           |
| <code>--mangled_names_in_messages</code>      | Adds mangled names in messages                                                                                                                                      |
| <code>--map</code>                            | Produces a map file                                                                                                                                                 |
| <code>--merge_duplicate_sections</code>       | Merges equivalent read-only sections                                                                                                                                |
| <code>--misrac</code>                         | Enables error messages specific to MISRA-C:1998. This option is a synonym to <code>--misrac1998</code> and is only available for backwards compatibility.           |
| <code>--misrac1998</code>                     | Enables error messages specific to MISRA-C:1998. See the <i>IAR Embedded Workbench® MISRA C:1998 Reference Guide</i> .                                              |

Table 31: Linker options summary (Continued)

| Command line option                        | Description                                                                                                                                                                            |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--misrac2004</code>                  | Enables error messages specific to MISRA-C:2004. See the <i>IAR Embedded Workbench® MISRA C:2004 Reference Guide</i> .                                                                 |
| <code>--misrac_verbose</code>              | Enables verbose logging of MISRA C checking. See the <i>IAR Embedded Workbench® MISRA C:1998 Reference Guide</i> and the <i>IAR Embedded Workbench® MISRA C:2004 Reference Guide</i> . |
| <code>--no_dynamic_rtti_elimination</code> | Includes dynamic runtime type information even when it is not needed.                                                                                                                  |
| <code>--no_exceptions</code>               | Generates an error if exceptions are used                                                                                                                                              |
| <code>--no_fragments</code>                | Disables section fragment handling                                                                                                                                                     |
| <code>--no_library_search</code>           | Disables automatic runtime library search                                                                                                                                              |
| <code>--no_literal_pool</code>             | Generates code that should run from a memory region where it is not allowed to read data, only to execute code                                                                         |
| <code>--no_locals</code>                   | Removes local symbols from the ELF executable image.                                                                                                                                   |
| <code>--no_range_reservations</code>       | Disables range reservations for absolute symbols                                                                                                                                       |
| <code>--no_remove</code>                   | Disables removal of unused sections                                                                                                                                                    |
| <code>--no_veneers</code>                  | Disables generation of veneers                                                                                                                                                         |
| <code>--no_vfe</code>                      | Disables Virtual Function Elimination                                                                                                                                                  |
| <code>--no_warnings</code>                 | Disables generation of warnings                                                                                                                                                        |
| <code>--no_wrap_diagnostics</code>         | Does not wrap long lines in diagnostic messages                                                                                                                                        |
| <code>-o</code>                            | Sets the object filename. Alias for <code>--output</code> .                                                                                                                            |
| <code>--only_stdout</code>                 | Uses standard output only                                                                                                                                                              |
| <code>--output</code>                      | Sets the object filename                                                                                                                                                               |
| <code>--pi_veneers</code>                  | Generates position independent veneers.                                                                                                                                                |
| <code>--place_holder</code>                | Reserve a place in ROM to be filled by some other tool, for example a checksum calculated by <code>ielftool</code> .                                                                   |
| <code>--redirect</code>                    | Redirects a reference to a symbol to another symbol                                                                                                                                    |
| <code>--remarks</code>                     | Enables remarks                                                                                                                                                                        |
| <code>--search</code>                      | Specifies more directories to search for object and library files                                                                                                                      |

Table 31: Linker options summary (Continued)

| Command line option                        | Description                                                                         |
|--------------------------------------------|-------------------------------------------------------------------------------------|
| <code>--semihosting</code>                 | Links with debug interface                                                          |
| <code>--silent</code>                      | Sets silent operation                                                               |
| <code>--skip_dynamic_initialization</code> | Suppresses dynamic initialization during system startup                             |
| <code>--stack_usage_control</code>         | Specifies a stack usage control file                                                |
| <code>--strip</code>                       | Removes debug information from the executable image                                 |
| <code>--threaded_lib</code>                | Configures the runtime library for use with threads                                 |
| <code>--vfe</code>                         | Controls Virtual Function Elimination                                               |
| <code>--warnings_affect_exit_code</code>   | Warnings affects exit code                                                          |
| <code>--warnings_are_errors</code>         | Warnings are treated as errors                                                      |
| <code>--whole_archive</code>               | Treats every object file in the archive as if it was specified on the command line. |

Table 31: Linker options summary (Continued)

## Descriptions of linker options

The following section gives detailed reference information about each linker option.



Note that if you use the options page **Extra Options** to specify specific command line options, the IDE does not perform an instant check for consistency problems like conflicting options, duplication of options, or use of irrelevant options.

### --advanced\_heap

Syntax

`--advanced_heap`

Description

Use this option to use an advanced heap.

See also

*Advanced versus basic heap*, page 189



To set this option, use **Project>Options>Linker>Extra Options**.

### --basic\_heap

Syntax

`--basic_heap`

Description Use this option to use a basic heap.

See also *Advanced versus basic heap*, page 189



To set this option, use **Project>Options>Linker>Extra Options**.

## --BE8

Syntax --BE8

Description Use this option to specify the Byte Invariant Addressing mode.

This means that the linker reverses the byte order of the instructions, resulting in little-endian code and big-endian data. This is the default byte addressing mode for ARMv6 big-endian images. This is the only mode available for ARM v6M and ARM v7 with big-endian images.

Byte Invariant Addressing mode is only available on ARM processors that support ARMv6, ARM v6M, and ARM v7.

See also *Byte order*, page 56, *Byte order*, page 306, *--BE32*, page 279, and *--endian*, page 249.



**Project>Options>General Options>Target>Endian mode**

## --BE32

Syntax --BE32

Description Use this option to specify the legacy big-endian mode.

This produces big-endian code and data. This is the only byte-addressing mode for all big-endian images prior to ARMv6. This mode is also available for ARM v6 with big-endian, but not for ARM v6M or ARM v7.

See also *Byte order*, page 56, *Byte order*, page 306, *--BE8*, page 279, and *--endian*, page 249.



**Project>Options>General Options>Target>Endian mode**

## --call\_graph

|             |                                                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--call_graph {filename directory}</code>                                                                                                                                                                                                           |
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                        |
| Description | Use this option to produce a call graph file. If no filename extension is specified, the extension <code>cgx</code> is used. This option can only be used once on the command line.<br><br>Using this option enables stack usage analysis in the linker. |
| See also    | <i>Stack usage analysis</i> , page 84                                                                                                                                                                                                                    |



**Project>Options>Linker>Advanced>Call graph output (XML)**

## --config

|             |                                                                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--config filename</code>                                                                                                                                                                                                                                   |
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                                |
| Description | Use this option to specify the configuration file to be used by the linker (the default filename extension is <code>icf</code> ). If no configuration file is specified, a default configuration is used. This option can only be used once on the command line. |
| See also    | The chapter <i>The linker configuration file</i> .                                                                                                                                                                                                               |



**Project>Options>Linker>Config>Linker configuration file**

## --config\_def

|            |                                                   |                                                                                                      |
|------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Syntax     | <code>--config_def symbol[=constant_value]</code> |                                                                                                      |
| Parameters | <i>symbol</i>                                     | The name of the symbol to be used in the configuration file. By default, the value 0 (zero) is used. |
|            | <i>constant_value</i>                             | The constant value of the configuration symbol.                                                      |



**Description** Use this option to define a constant configuration symbol to be used in the configuration file. This option has the same effect as the `define symbol` directive in the linker configuration file. This option can be used more than once on the command line.

**See also** `--define_symbol`, page 282 and *Interaction between ILINK and the application*, page 99.



**Project>Options>Linker>Config>Defined symbols for configuration file**

## --cpp\_init\_routine

**Syntax** `--cpp_init_routine routine`

**Parameters** `routine` A user-defined C++ dynamic initialization routine.

**Description** When using the IAR C/C++ compiler and the standard library, C++ dynamic initialization is handled automatically. In other cases you might need to use this option.

If any sections with the section type `INIT_ARRAY` or `PREINIT_ARRAY` are included in your application, the C++ dynamic initialization routine is considered to be needed. By default, this routine is named `__iar_cstart_call_ctors` and is called by the startup code in the standard library. Use this option if you are not using the standard library and require another routine to handle these section types.



To set this option, use **Project>Options>Linker>Extra Options**.

## --cpu

**Syntax** `--cpu=core`

**Parameters** `core` Specifies a specific processor variant

**Description** Use this option to select the processor variant to link your application for. The default is to use a processor or architecture compatible with the object file attributes.

**See also** `--cpu`, page 240



**Project>Options>General Options>Target>Processor configuration**

## --define\_symbol

|             |                                                                                                                                                                                                                                                   |                                                                      |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Syntax      | <code>--define_symbol symbol=constant_value</code>                                                                                                                                                                                                |                                                                      |
| Parameters  | <i>symbol</i>                                                                                                                                                                                                                                     | The name of the constant symbol that can be used by the application. |
|             | <i>constant_value</i>                                                                                                                                                                                                                             | The constant value of the symbol.                                    |
| Description | Use this option to define a constant symbol, that is a label, that can be used by your application. This option can be used more than once on the command line. Note that this option is different from the <code>define symbol</code> directive. |                                                                      |
| See also    | <code>--config_def</code> , page 280 and <i>Interaction between ILINK and the application</i> , page 99.                                                                                                                                          |                                                                      |



**Project>Options>Linker>#define>Defined symbols**

## --dependencies

|             |                                                                                                                                                                                                                                                                              |                               |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Syntax      | <code>--dependencies [= [i m]] {filename directory}</code>                                                                                                                                                                                                                   |                               |
| Parameters  | <code>i</code> (default)                                                                                                                                                                                                                                                     | Lists only the names of files |
|             | <code>m</code>                                                                                                                                                                                                                                                               | Lists in makefile style       |
|             | See also <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                                       |                               |
| Description | Use this option to make the linker list the names of the linker configuration, object, and library files opened for input into a file with the default filename extension <code>i</code> .                                                                                   |                               |
| Example     | If <code>--dependencies</code> or <code>--dependencies=i</code> is used, the name of each opened input file, including the full path, if available, is output on a separate line. For example:                                                                               |                               |
|             | <pre>c:\myproject\foo.o d:\myproject\bar.o</pre>                                                                                                                                                                                                                             |                               |
|             | If <code>--dependencies=m</code> is used, the output is in makefile style. For each input file, one line containing a makefile dependency rule is produced. Each line consists of the name of the output file, a colon, a space, and the name of an input file. For example: |                               |
|             | <pre>a.out: c:\myproject\foo.o a.out: d:\myproject\bar.o</pre>                                                                                                                                                                                                               |                               |



This option is not available in the IDE.

## --diag\_error

Syntax

```
--diag_error=tag[, tag, ...]
```

Parameters

*tag*                      The number of a diagnostic message, for example the message number Pe117

Description

Use this option to reclassify certain diagnostic messages as errors. An error indicates a problem of such severity that an executable image will not be generated. The exit code will be non-zero. This option may be used more than once on the command line.



**Project>Options>Linker>Diagnostics>Treat these as errors**

## --diag\_remark

Syntax

```
--diag_remark=tag[, tag, ...]
```

Parameters

*tag*                      The number of a diagnostic message, for example the message number Pe177

Description

Use this option to reclassify certain diagnostic messages as remarks. A remark is the least severe type of diagnostic message and indicates a construction that may cause strange behavior in the executable image. This option may be used more than once on the command line.

**Note:** By default, remarks are not displayed; use the `--remarks` option to display them.



**Project>Options>Linker>Diagnostics>Treat these as remarks**

## --diag\_suppress

Syntax

```
--diag_suppress=tag[, tag, ...]
```

Parameters

*tag*

The number of a diagnostic message, for example the message number Pe117

Description

Use this option to suppress certain diagnostic messages. These messages will not be displayed. This option may be used more than once on the command line.



**Project>Options>Linker>Diagnostics>Suppress these diagnostics**

## --diag\_warning

Syntax

--diag\_warning=*tag*[, *tag*, ...]

Parameters

*tag*

The number of a diagnostic message, for example the message number Pe826

Description

Use this option to reclassify certain diagnostic messages as warnings. A warning indicates an error or omission that is of concern, but which will not cause the linker to stop before linking is completed. This option may be used more than once on the command line.



**Project>Options>Linker>Diagnostics>Treat these as warnings**

## --diagnostics\_tables

Syntax

--diagnostics\_tables {*filename*|*directory*}

Parameters

See *Rules for specifying a filename or directory as parameters*, page 232.

Description


Use this option to list all possible diagnostic messages in a named file. This can be convenient, for example, if you have used a pragma directive to suppress or change the severity level of any diagnostic messages, but forgot to document why.

This option cannot be given together with other options.




This option is not available in the IDE.

## --enable\_hardware\_workaround

|             |                                                                                           |                                                                                                                                                          |
|-------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--enable_hardware_workaround=<i>waid</i>[<i>waid</i>...]</code>                     |                                                                                                                                                          |
| Parameters  | <i>waid</i>                                                                               | The ID number of the workaround that you want to enable. For a list of available workarounds, see the release notes available in the Information Center. |
| Description | Use this option to make the linker generate a workaround for a specific hardware problem. |                                                                                                                                                          |
| See also    | The release notes for the linker for a list of available parameters.                      |                                                                                                                                                          |
|             |          | To set this option, use <b>Project&gt;Options&gt;Linker&gt;Extra Options</b> .                                                                           |

## --enable\_stack\_usage

|             |                                                                                                                                                                                                                                                                                                                 |                                                                                |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Syntax      | <code>--enable_stack_usage</code>                                                                                                                                                                                                                                                                               |                                                                                |
| Description | Use this option to enable stack usage analysis. If a linker map file is produced, a stack usage chapter is included in the map file.<br><br><b>Note:</b> If you use at least one of the <code>--stack_usage_control</code> or <code>--call_graph</code> options, stack usage analysis is automatically enabled. |                                                                                |
| See also    | <i>Stack usage analysis</i> , page 84                                                                                                                                                                                                                                                                           |                                                                                |
|             |                                                                                                                                                                                                                              | <b>Project&gt;Options&gt;Linker&gt;Advanced&gt;Enable stack usage analysis</b> |

## --entry

|             |                                                                                                                                                                                       |                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Syntax      | <code>--entry <i>symbol</i></code>                                                                                                                                                    |                                                                       |
| Parameters  | <i>symbol</i>                                                                                                                                                                         | The name of the symbol to be treated as a root symbol and start label |
| Description | Use this option to make a symbol be treated as a root symbol and the start label of the application. This is useful for loaders. If this option is not used, the default start symbol |                                                                       |

is `__iar_program_start`. A root symbol is kept whether or not it is referenced from the rest of the application, provided its module is included. A module in an object file is always included but a module part of a library is only included if needed.

**Note:** The label referred to must be available in your application. You must also make sure that the reset vector refers to the new start label (for example `--redirect __iar_program_start=_myStartLabel`).



**Project>Options>Linker>Library>Override default program entry**

## --error\_limit


|             |                                                                                                                                                            |                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--error_limit=n</code>                                                                                                                               |                                                                                                                  |
| Parameters  | <i>n</i>                                                                                                                                                   | The number of errors before the linker stops linking. <i>n</i> must be a positive integer; 0 indicates no limit. |
| Description | Use the <code>--error_limit</code> option to specify the number of errors allowed before the linker stops the linking. By default, 100 errors are allowed. |                                                                                                                  |




This option is not available in the IDE.

## --exception\_tables


|            |                                                              |                                                                                                                                                                         |
|------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax     | <code>--exception_tables={nocreate unwind cantunwind}</code> |                                                                                                                                                                         |
| Parameters | <code>nocreate</code> (default)                              | Does not generate entries. Uses the least amount of memory, but the result is undefined if an exception is propagated through a function without exception information. |
|            | <code>unwind</code>                                          | Generates unwind entries that enable an exception to be correctly propagated through functions without exception information.                                           |
|            | <code>cantunwind</code>                                      | Generates no-unwind entries so that any attempt to propagate an exception through the function will result in a call to <code>terminate</code> .                        |

|             |                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Use this option to determine what the linker should do with functions that do not have exception information but which do have correct call frame information.<br><br>The compiler ensures that C functions get correct call frame information. For functions written in assembler language you need to use assembler directives to generate call frame information. |
| See also    | <i>Using C++</i> , page 175.<br><br> To set this option, use <b>Project&gt;Options&gt;Linker&gt;Extra Options</b> .                                                                                                                                                                 |

## **--export\_builtin\_config**

|             |                                                                                                                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--export_builtin_config filename</code>                                                                                                                                          |
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                      |
| Description | Exports the configuration used by default to a file.<br><br> This option is not available in the IDE. |

## **--extra\_init**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--extra_init routine</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Parameters  | <i>routine</i> A user-defined initialization routine.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Description | Use this option to make the linker add an entry for the specified routine at the end of the initialization table. The routine will be called during system startup, after other initialization routines have been called and before <code>main</code> is called. Note that the routine must preserve the value passed to it in register <code>R0</code> . No entry is added if the routine is not defined.<br><br> To set this option, use <b>Project&gt;Options&gt;Linker&gt;Extra Options</b> . |

## **-f**

|        |                          |
|--------|--------------------------|
| Syntax | <code>-f filename</code> |
|--------|--------------------------|

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description | <p>Use this option to make the linker read command line options from the named file, with the default filename extension <code>.xcl</code>.</p> <p>In the command file, you format the items exactly as if they were on the command line itself, except that you may use multiple lines, because the newline character acts just as a space or tab character.</p> <p>Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.</p> |



To set this option, use **Project>Options>Linker>Extra Options**.

## **--force\_exceptions**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--force_exceptions</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Description | <p>Use this option to make the linker include exception tables and exception code even when the linker heuristics indicate that exceptions are not used.</p> <p>The linker considers exceptions to be used if there is a <code>throw</code> expression that is not a <code>rethrow</code> in the included code. If there is no such <code>throw</code> expression in the rest of the code, the linker arranges for <code>operator new</code>, <code>dynamic_cast</code>, and <code>typeid</code> to call <code>abort</code> instead of throwing an exception on failure. If you need to catch exceptions from these constructs but your code contains no other throws, you might need to use this option.</p> |
| See also    | <p><i>Using C++</i>, page 175.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



**Project>Options>Linker>Optimizations>C++ Exceptions>Allow>Always include**

## **--force\_output**

|             |                                                                                                |
|-------------|------------------------------------------------------------------------------------------------|
| Syntax      | <code>--force_output</code>                                                                    |
| Description | <p>Use this option to produce an output executable image regardless of any linking errors.</p> |



To set this option, use **Project>Options>Linker>Extra Options**



## --image\_input

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--image_input filename [,symbol,[section[,alignment]]]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Parameters  | <p><i>filename</i>            The pure binary file containing the raw image you want to link</p> <p><i>symbol</i>             The symbol which the binary data can be referenced with.</p> <p><i>section</i>            The section where the binary data will be placed; default is <code>.text</code>.</p> <p><i>alignment</i>         The alignment of the section; default is 1.</p>                                                                                                                                                                                                                                                                         |
| Description | <p>Use this option to link pure binary files in addition to the ordinary input files. The file's entire contents are placed in the section, which means it can only contain pure binary data.</p> <p><b>Note:</b> Just as for sections from object files, sections created by using the <code>--image_input</code> option are not included unless actually needed. You can either specify a symbol in the option and reference this symbol in your application (or by use of a <code>--keep</code> option), or you can specify a section name and use the <code>keep</code> directive in a linker configuration file to ensure that the section is included.</p> |
| Example     | <pre>--image_input bootstrap.abs,Bootstrap,CSTARTUPCODE,4</pre> <p>The contents of the pure binary file <code>bootstrap.abs</code> are placed in the section <code>CSTARTUPCODE</code>. The section where the contents are placed is 4-byte aligned and will only be included if your application (or the command line option <code>--keep</code>) includes a reference to the symbol <code>Bootstrap</code>.</p>                                                                                                                                                                                                                                                |
| See also    | <code>--keep</code> , page 290.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



**Project>Options>Linker>Input>Raw binary image**

## --inline

|             |                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>--inline</code>                                                                                                                                                                                                        |
| Description | <p>Some routines are so small that they can fit in the space of the instruction that calls the routine. Use this option to make the linker replace the call of a routine with the body of the routine, where applicable.</p> |



**Project>Options>Linker>Optimizations>Inline small routines**

**--keep**

|             |                                                                                                                                                             |                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Syntax      | <code>--keep <i>symbol</i></code>                                                                                                                           |                                                       |
| Parameters  | <code><i>symbol</i></code>                                                                                                                                  | The name of the symbol to be treated as a root symbol |
| Description | Normally, the linker keeps a symbol only if it is needed by your application. Use this option to make a symbol always be included in the final application. |                                                       |



**Project>Options>Linker>Input>Keep symbols**

**--log**

|            |                                             |                                                                                                                                                                                                                                |
|------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax     | <code>--log <i>topic[,topic,...]</i></code> |                                                                                                                                                                                                                                |
| Parameters | <code><i>topic</i></code> can be one of:    |                                                                                                                                                                                                                                |
|            | <code>call_graph</code>                     | Lists the call graph as seen by stack usage analysis.                                                                                                                                                                          |
|            | <code>initialization</code>                 | Lists copy batches and the compression selected for each batch.                                                                                                                                                                |
|            | <code>libraries</code>                      | Lists all decisions taken by the automatic library selector. This might include extra symbols needed ( <code>--keep</code> ), redirections ( <code>--redirect</code> ), as well as which runtime libraries that were selected. |
|            | <code>modules</code>                        | Lists each module that is selected for inclusion in the application, and which symbol that caused it to be included.                                                                                                           |
|            | <code>redirects</code>                      | Lists redirected symbols.                                                                                                                                                                                                      |
|            | <code>sections</code>                       | Lists each symbol and section fragment that is selected for inclusion in the application, and the dependence that caused it to be included.                                                                                    |
|            | <code>unused_fragments</code>               | Lists those section fragments that were not included in the application.                                                                                                                                                       |

|             |                      |                                                                                                                                                                               |
|-------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <code>veeners</code> | Lists some veneer creation and usage statistics.                                                                                                                              |
| Description |                      | Use this option to make the linker log information to <code>stdout</code> . The log information can be useful for understanding why an executable image became the way it is. |
| See also    |                      | <code>--log_file</code> , page 291.                                                                                                                                           |



**Project>Options>Linker>List>Generate log**

## **--log\_file**

|             |  |                                                                                   |
|-------------|--|-----------------------------------------------------------------------------------|
| Syntax      |  | <code>--log_file filename</code>                                                  |
| Parameters  |  | See <i>Rules for specifying a filename or directory as parameters</i> , page 232. |
| Description |  | Use this option to direct the log output to the specified file.                   |
| See also    |  | <code>--log</code> , page 290.                                                    |



**Project>Options>Linker>List>Generate log**

## **--mangled\_names\_in\_messages**

|             |  |                                                                                                                                                                                                                                                                                                 |
|-------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      |  | <code>--mangled_names_in_messages</code>                                                                                                                                                                                                                                                        |
| Description |  | Use this option to produce both mangled and unmangled names for C/C++ symbols in messages. Mangling is a technique used for mapping a complex C name or a C++ name (for example, for overloading) into a simple name. For example, <code>void h(int, char)</code> becomes <code>_Z1hic</code> . |



This option is not available in the IDE.

## **--map**

|        |  |                                         |
|--------|--|-----------------------------------------|
| Syntax |  | <code>--map {filename directory}</code> |
|--------|--|-----------------------------------------|

Description

Use this option to produce a linker memory map file. The map file has the default filename extension `map`. The map file contains:

- Linking summary in the map file header which lists the version of the linker, the current date and time, and the command line that was used.
- Runtime attribute summary which lists runtime attributes.
- Placement summary which lists each section/block in address order, sorted by placement directives.
- Initialization table layout which lists the data ranges, packing methods, and compression ratios.
- Module summary which lists contributions from each module to the image, sorted by directory and library.
- Entry list which lists all public and some local symbols in alphabetical order, indicating which module they came from.
- Some of the bytes might be reported as *shared*.

Shared objects are functions or data objects that are shared between modules. If any of these occur in more than one module, only one copy is retained. For example, in some cases inline functions are not inlined, which means that they are marked as shared, because only one instance of each function will be included in the final application. This mechanism is sometimes also used for compiler-generated code or data not directly associated with a particular function or variable, and when only one instance is required in the final application.

This option can only be used once on the command line.



**Project>Options>Linker>List>Generate linker map file**

## **--merge\_duplicate\_sections**

Syntax

`--merge_duplicate_sections`

Description

Use this option to keep only one copy of equivalent read-only sections. Note that this can cause different functions or constants to have the same address, so an application that depends on the addresses being different will not work correctly with this option enabled.



**Project>Options>Linker>Optimizations>Merge duplicate sections**

## --no\_dynamic\_rtti\_elimination

Syntax `--no_dynamic_rtti_elimination`

Description Use this option to make the linker include dynamic (polymorphic) runtime type information (RTTI) data in the application image even when the linker heuristics indicate that it is not needed.

The linker considers dynamic runtime type information to be needed if there is a `typeid` or `dynamic_cast` expression for a polymorphic type in the included code. By default, if the linker detects no such expression, RTTI data will not be included just to make dynamic RTTI requests work.

**Note:** A `typeid` expression for a *non*-polymorphic type results in a direct reference to a particular RTTI object and will not cause the linker to include any potentially unneeded objects.

See also *Using C++*, page 175.



To set this option, use **Project>Options>Linker>Extra Options**.

## --no\_exceptions

Syntax `--no_exceptions`

Description Use this option to make the linker generate an error if there is a throw in the included code. This option is useful for making sure that your application does not use exceptions.

See also *Using C++*, page 175.



To set related options, choose:

**Project>Options>Linker>Optimizations>Allow C++ exceptions**

## --no\_fragments

Syntax `--no_fragments`

Description Use this option to disable section fragment handling. Normally, the toolset uses IAR proprietary information for transferring section fragment information to the linker. The linker uses this information to remove unused code and data, and thus further minimize the size of the executable image. Use this option to disable the removal of fragments of

sections, instead including or not including each section in its entirety, usually resulting in a larger application.

See also

*Keeping symbols and sections*, page 94.



To set this option, use **Project>Options>Linker>Extra Options**

## **--no\_library\_search**

Syntax

`--no_library_search`

Description

Use this option to disable the automatic runtime library search. This option turns off the automatic inclusion of the correct standard libraries. This is useful, for example, if the application needs a user-built standard library, etc.

Note that the option disables all steps of the automatic library selection, some of which might need to be reproduced if you are using the standard libraries. Use the `--log_libraries` linker option together with automatic library selection enabled to determine which the steps are.



**Project>Options>Linker>Library>Automatic runtime library selection**

## **--no\_literal\_pool**

Syntax

`--no_literal_pool`

Description

Use this option for code that should run from a memory region where it is not allowed to read data, only to execute code.

When this option is used, the linker will use the `MOV32` pseudo instruction in a mode-changing veneer, to avoid using the data bus to load the destination address. The option also means that libraries compiled with this option will be used.

The option `--no_literal_pool` is only allowed for ARMv7-M cores.

See also

*--no\_literal\_pool*, page 258.



To set this option, use **Project>Options>Linker>Extra Options**.

## --no\_locals

Syntax `--no_locals`

Description Use this option to remove local symbols from the ELF executable image.

**Note:** This option does not remove any local symbols from the DWARF information in the executable image.



**Project>Options>Linker>Output**

## --no\_range\_reservations

Syntax `--no_range_reservations`

Description Normally, the linker reserves any ranges used by absolute symbols with a non-zero size, excluding them from consideration for `place in` commands.

When this option is used, these reservations are disabled, and the linker is free to place sections in such a way as to overlap the extent of absolute symbols.



To set this option, use **Project>Options>Linker>Extra Options**.

## --no\_remove

Syntax `--no_remove`

Description When this option is used, unused sections are not removed. In other words, each module that is included in the executable image contains all its original sections.

See also *Keeping symbols and sections*, page 94.



To set this option, use **Project>Options>Linker>Extra Options**.

## **--no\_veneers**

Syntax `--no_veneers`

Description Use this option to disable the insertion of veneers even though the executable image needs it. In this case, the linker will generate a relocation error for each reference that needs a veneer.

See also *Veneers*, page 100.



To set this option, use **Project>Options>Linker>Extra Options**.

## **--no\_vfe**

Syntax `--no_vfe`

Description Use this option to disable the Virtual Function Elimination optimization. All virtual functions in all classes with at least one instance will be kept, and Runtime Type Information data will be kept for all polymorphic classes. Also, no warning message will be issued for modules that lack VFE information.

See also `--vfe`, page 301 and *Virtual function elimination*, page 196.



To set related options, choose:

**Project>Options>Linker>Optimizations>PerformC++ Virtual Function Elimination**

## **--no\_warnings**

Syntax `--no_warnings`

Description By default, the linker issues warning messages. Use this option to disable all warning messages.



This option is not available in the IDE.

## **--no\_wrap\_diagnostics**

Syntax `--no_wrap_diagnostics`



**Description** By default, long lines in diagnostic messages are broken into several lines to make the message easier to read. Use this option to disable line wrapping of diagnostic messages.



This option is not available in the IDE.

## --only\_stdout

**Syntax** `--only_stdout`

**Description** Use this option to make the linker use the standard output stream (`stdout`) also for messages that are normally directed to the error output stream (`stderr`).



This option is not available in the IDE.

## --output, -o

**Syntax** `--output {filename|directory}`  
`-o {filename|directory}`

**Parameters** See *Rules for specifying a filename or directory as parameters*, page 232.

**Description** By default, the object executable image produced by the linker is located in a file with the name `a.out`. Use this option to explicitly specify a different output filename, which by default will have the filename extension `out`.



**Project>Options>Linker>Output>Output file**

## --pi\_veneers

**Syntax** `--pi_veneers`

**Description** Use this option to make the linker generate position-independent veneers. Note that this type of veneer is larger and slower than normal veneers.

**See also** *Veneers*, page 100.



To set this option, use **Project>Options>Linker>Extra Options**.

## --place\_holder

Syntax `--place_holder symbol[,size[,section[,alignment]]]`

### Parameters

|                  |                                                    |
|------------------|----------------------------------------------------|
| <i>symbol</i>    | The name of the symbol to create                   |
| <i>size</i>      | Size in ROM; by default 4 bytes                    |
| <i>section</i>   | Section name to use; by default <code>.text</code> |
| <i>alignment</i> | Alignment of section; by default 1                 |

### Description

Use this option to reserve a place in ROM to be filled by some other tool, for example a checksum calculated by `ie1ftool`. Each use of this linker option results in a section with the specified name, size, and alignment. The symbol can be used by your application to refer to the section.

**Note:** Like any other section, sections created by the `--place_holder` option will only be included in your application if the section appears to be needed. The `--keep` linker option, or the `keep` linker directive can be used for forcing such section to be included.

### See also

*IAR utilities*, page 447.



To set this option, use **Project>Options>Linker>Extra Options**

## --redirect

Syntax `--redirect from_symbol=to_symbol`

### Parameters

|                    |                                    |
|--------------------|------------------------------------|
| <i>from_symbol</i> | The name of the source symbol      |
| <i>to_symbol</i>   | The name of the destination symbol |

### Description

Use this option to change a reference from one symbol to another symbol.



To set this option, use **Project>Options>Linker>Extra Options**

## --remarks

Syntax `--remarks`

**Description** The least severe diagnostic messages are called remarks. A remark indicates a source code construct that may cause strange behavior in the generated code. By default, the linker does not generate remarks. Use this option to make the linker generate remarks.

**See also** *Severity levels*, page 227.



**Project>Options>Linker>Diagnostics>Enable remarks**

## --search

**Syntax** `--search path`

**Parameters**

*path* A path to a directory where the linker should search for object and library files.

**Description** Use this option to specify more directories for the linker to search for object and library files in.

By default, the linker searches for object and library files only in the working directory. Each use of this option on the command line adds another search directory.

**See also** *The linking process*, page 48.



This option is not available in the IDE.

## --semihosting

**Syntax** `--semihosting[=iar_breakpoint]`

**Parameters**

*iar\_breakpoint* The IAR-specific mechanism can be used when debugging applications that use SWI/SVC extensively.

**Description** Use this option to include the debug interface—breakpoint mechanism—in the output image. If no parameter is specified, the SWI/SVC mechanism is included for ARM7/9/11, and the BKPT mechanism is included for Cortex-M.

**See also** *Application debug support*, page 111.



**Project>Options>General Options>Library Configuration>Semihosted**

## **--silent**

Syntax `--silent`

Description By default, the linker issues introductory messages and a final statistics report. Use this option to make the linker operate without sending these messages to the standard output stream (normally the screen).

This option does not affect the display of error and warning messages.



This option is not available in the IDE.

## **--skip\_dynamic\_initialization**

Syntax `--skip_dynamic_initialization`

Description When using the IAR C/C++ compiler and the standard library, C++ dynamic initialization is handled automatically.

Use this option to suppress dynamic initialization to be performed during system startup. Typically, this can be useful if you need to set up, for example, heap management for an RTOS before the initialization takes place.

In this case you must add a call to the library function `__iar_dynamic_initialization` in your application source code. Initialization will then take place at the time of the call to this function.



To set this option, use **Project>Options>Linker>Extra Options**.

## **--stack\_usage\_control**

Syntax `--stack_usage_control filename`

Parameters See *Rules for specifying a filename or directory as parameters*, page 232.

Description Use this option to specify a stack usage control file. This file controls stack usage analysis, or provides more stack usage information for modules or functions. You can

use this option multiple times to specify multiple stack usage control files. If no filename extension is specified, the extension `suc` is used.

Using this option enables stack usage analysis in the linker.

See also

*Stack usage analysis*, page 84



**Project>Options>Linker>Advanced>Control file**

## --strip

Syntax `--strip`

Description By default, the linker retains the debug information from the input object files in the output executable image. Use this option to remove that information.



To set related options, choose:

**Project>Options>Linker>Output>Include debug information in output**

## --threaded\_lib

Syntax `--threaded_lib`

Description Use this option to automatically configure the runtime library for use with threads.



**Project>Options>General Options>Library Configuration>Enable thread support in library**

## --vfe

Syntax `--vfe=[forced]`

Parameters `forced` Performs Virtual Function Elimination even if one or more modules lack the needed virtual function elimination information.

Description Use this option to perform Virtual Function Elimination even if one or more modules lack the needed virtual function elimination information. Without the parameter `forced`, this option has no effect.

Forcing the use of Virtual Function Elimination can be unsafe if some of the modules that lack the needed information perform virtual function calls or use dynamic Runtime Type Information.

See also `--no_vfe`, page 296 and *Virtual function elimination*, page 196.



To set related options, choose:

**Project>Options>Linker>Optimizations>Perform C++ Virtual Function Elimination**

## **--warnings\_affect\_exit\_code**

Syntax `--warnings_affect_exit_code`

Description By default, the exit code is not affected by warnings, because only errors produce a non-zero exit code. With this option, warnings will also generate a non-zero exit code.



This option is not available in the IDE.

## **--warnings\_are\_errors**

Syntax `--warnings_are_errors`

Description Use this option to make the linker treat all warnings as errors. If the linker encounters an error, no executable image is generated. Warnings that have been changed into remarks are not treated as errors.

**Note:** Any diagnostic messages that have been reclassified as warnings by the option `--diag_warning` will also be treated as errors when `--warnings_are_errors` is used.

See also `--diag_warning`, page 245 and `--diag_warning`, page 284.



**Project>Options>Linker>Diagnostics>Treat all warnings as errors**

## **--whole\_archive**

Syntax `--whole_archive filename`

Parameters See *Rules for specifying a filename or directory as parameters*, page 232.

**Description** Use this option to make the linker treat every object file in the archive as if it was specified on the command line. This is useful when an archive contains root content that is always included from an object file (filename extension `o`), but only included from an archive if some entry from the module is referred to.

**Example** If `archive.a` contains the object files `file1.o`, `file2.o`, and `file3.o`, using `--whole_archive archive.a` is equivalent to specifying `file1.o file2.o file3.o`.

**See also** *Keeping modules*, page 94



To set this option, use **Project>Options>Linker>Extra Options**





# Data representation

- Alignment
- Byte order
- Basic data types—integer types
- Basic data types—floating-point types
- Pointer types
- Structure types
- Type qualifiers
- Data types in C++

See the chapter *Efficient coding for embedded applications* for information about which data types provide the most efficient code for your application.

---

## Alignment

Every C data object has an alignment that controls how the object can be stored in memory. Should an object have an alignment of, for example, 4, it must be stored on an address that is divisible by 4.

The reason for the concept of alignment is that some processors have hardware limitations for how the memory can be accessed.

Assume that a processor can read 4 bytes of memory using one instruction, but only when the memory read is placed on an address divisible by 4. Then, 4-byte objects, such as `long` integers, will have alignment 4.

Another processor might only be able to read 2 bytes at a time; in that environment, the alignment for a 4-byte `long` integer might be 2.

A structure type will have the same alignment as the structure member with the most strict alignment. To decrease the alignment requirements on the structure and its members, use `#pragma pack` or the `__packed` data type attribute.

All data types must have a size that is a multiple of their alignment. Otherwise, only the first element of an array would be guaranteed to be placed in accordance with the alignment requirements. This means that the compiler might add pad bytes at the end of the structure. For more information about pad bytes, see *Packed structure types*, page 315.

Note that with the `#pragma data_alignment` directive you can increase the alignment demands on specific variables.

### ALIGNMENT ON THE ARM CORE

The alignment of a data object controls how it can be stored in memory. The reason for using alignment is that the ARM core can access 4-byte objects more efficiently when the object is stored at an address divisible by 4.

Objects with alignment 4 must be stored at an address divisible by 4, while objects with alignment 2 must be stored at addresses divisible by 2.

The compiler ensures this by assigning an alignment to every data type, ensuring that the ARM core will be able to read the data.

For related information, see `--align_sp_on_irq`, page 239 and `--no_const_align`, page 256.

---

## Byte order

In the little-endian byte order, which is default, the *least* significant byte is stored at the lowest address in memory. The *most* significant byte is stored at the highest address.

In the big-endian byte order, the *most* significant byte is stored at the lowest address in memory. The *least* significant byte is stored at the highest address. If you use the big-endian byte order, it might be necessary to use the `#pragma bitfields=reversed` directive to be compatible with code for other compilers and I/O register definitions of some devices, see *Bitfields*, page 308.

**Note:** There are two variants of the big-endian mode, BE8 and BE32, which you specify at link time. In BE8 data is big-endian and code is little-endian. In BE32 both data and code are big-endian. In architectures before v6, the BE32 endian mode is used, and after v6 the BE8 mode is used. In the v6 (ARM11) architecture, both big-endian modes are supported.

## Basic data types—integer types

The compiler supports both all Standard C basic data types and some additional types.

### INTEGER TYPES—AN OVERVIEW

This table gives the size and range of each integer data type:

| Data type                       | Size    | Range                   | Alignment |
|---------------------------------|---------|-------------------------|-----------|
| <code>bool</code>               | 8 bits  | 0 to 1                  | 1         |
| <code>char</code>               | 8 bits  | 0 to 255                | 1         |
| <code>signed char</code>        | 8 bits  | -128 to 127             | 1         |
| <code>unsigned char</code>      | 8 bits  | 0 to 255                | 1         |
| <code>signed short</code>       | 16 bits | -32768 to 32767         | 2         |
| <code>unsigned short</code>     | 16 bits | 0 to 65535              | 2         |
| <code>signed int</code>         | 32 bits | $-2^{31}$ to $2^{31}-1$ | 4         |
| <code>unsigned int</code>       | 32 bits | 0 to $2^{32}-1$         | 4         |
| <code>signed long</code>        | 32 bits | $-2^{31}$ to $2^{31}-1$ | 4         |
| <code>unsigned long</code>      | 32 bits | 0 to $2^{32}-1$         | 4         |
| <code>signed long long</code>   | 64 bits | $-2^{63}$ to $2^{63}-1$ | 8         |
| <code>unsigned long long</code> | 64 bits | 0 to $2^{64}-1$         | 8         |

Table 32: Integer types

Signed variables are represented using the two's complement form.

### BOOL

The `bool` data type is supported by default in the C++ language. If you have enabled language extensions, the `bool` type can also be used in C source code if you include the file `stdbool.h`. This will also enable the boolean values `false` and `true`.

### THE ENUM TYPE

The compiler will use the smallest type required to hold `enum` constants, preferring signed rather than unsigned.

When IAR Systems language extensions are enabled, and in C++, the `enum` constants and types can also be of the type `long`, `unsigned long`, `long long`, or `unsigned long long`.

To make the compiler use a larger type than it would automatically use, define an `enum` constant with a large enough value. For example:

```
/* Disables usage of the char type for enum */
enum Cards{Spade1, Spade2,
           DontUseChar=257};
```

For related information, see `--enum_is_int`, page 250.

## THE CHAR TYPE

The `char` type is by default unsigned in the compiler, but the `--char_is_signed` compiler option allows you to make it signed. Note, however, that the library is compiled with the `char` type as unsigned.

## THE WCHAR\_T TYPE

The `wchar_t` data type is an integer type whose range of values can represent distinct codes for all members of the largest extended character set specified among the supported locals.

The `wchar_t` data type is supported by default in the C++ language. To use the `wchar_t` type also in C source code, you must include the file `stddef.h` from the runtime library.

## BITFIELDS

In Standard C, `int`, `signed int`, and `unsigned int` can be used as the base type for integer bitfields. In standard C++, and in C when language extensions are enabled in the compiler, any integer or enumeration type can be used as the base type. It is implementation defined whether a plain integer type (`char`, `short`, `int`, etc) results in a signed or unsigned bitfield.

In the IAR C/C++ Compiler for ARM, plain integer types are treated as unsigned.

Bitfields in expressions are treated as `int` if `int` can represent all values of the bitfield. Otherwise, they are treated as the bitfield base type.

Each bitfield is placed in the next container of its base type that has enough available bits to accommodate the bitfield. Within each container, the bitfield is placed in the first available byte or bytes, taking the byte order into account.

In addition, the compiler supports an alternative bitfield allocation strategy (disjoint types), where bitfield containers of different types are not allowed to overlap. Using this allocation strategy, each bitfield is placed in a new container if its type is different from that of the previous bitfield, or if the bitfield does not fit in the same container as the previous bitfield. Within each container, the bitfield is placed from the least significant bit to the most significant bit (disjoint types) or from the most significant bit to the least

significant bit (reverse disjoint types). This allocation strategy will never use less space than the default allocation strategy (joined types), and can use significantly more space when mixing bitfield types.

Use the `#pragma bitfield` directive to choose which bitfield allocation strategy to use, see *bitfields*, page 335.

Assume this example:

```
struct BitfieldExample
{
    uint32_t a : 12;
    uint16_t b : 3;
    uint16_t c : 7;
    uint8_t d;
};
```

### The example in the joined types bitfield allocation strategy


To place the first bitfield, `a`, the compiler allocates a 32-bit container at offset 0 and puts `a` into the first and second bytes of the container.

For the second bitfield, `b`, a 16-bit container is needed and because there are still four bits free at offset 0, the bitfield is placed there.


For the third bitfield, `c`, as there is now only one bit left in the first 16-bit container, a new container is allocated at offset 2, and `c` is placed in the first byte of this container.

The fourth member, `d`, can be placed in the next available full byte, which is the byte at offset 3.

In little-endian mode, each bitfield is allocated starting from the least significant free bit of its container to ensure that it is placed into bytes from left to right.

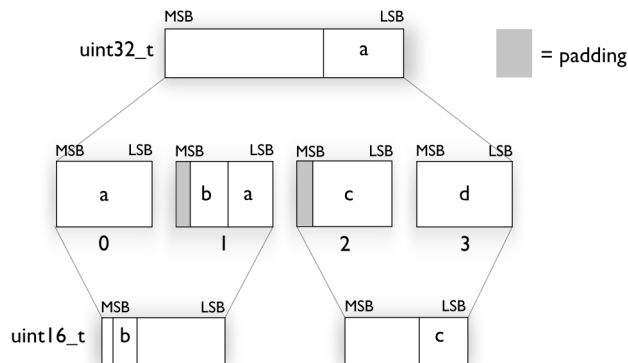

In big-endian mode, each bitfield is allocated starting from the most significant free bit of its container to ensure that it is placed into bytes from left to right.

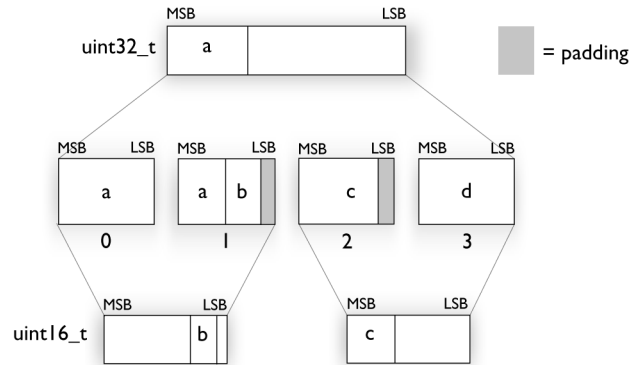

### The example in the disjoint types bitfield allocation strategy

To place the first bitfield, *a*, the compiler allocates a 32-bit container at offset 0 and puts *a* into the least significant 12 bits of the container.


To place the second bitfield, *b*, a new container is allocated at offset 4, because the type of the bitfield is not the same as that of the previous one. *b* is placed into the least significant three bits of this container.

The third bitfield, *c*, has the same type as *b* and fits into the same container.


The fourth member, *d*, is allocated into the byte at offset 6. *d* cannot be placed into the same container as *b* and *c* because it is not a bitfield, it is not of the same type, and it would not fit.

When using reverse order (reverse disjoint types), each bitfield is instead placed starting from the most significant bit of its container.

This is the layout of `bitfield_example` in little-endian mode:

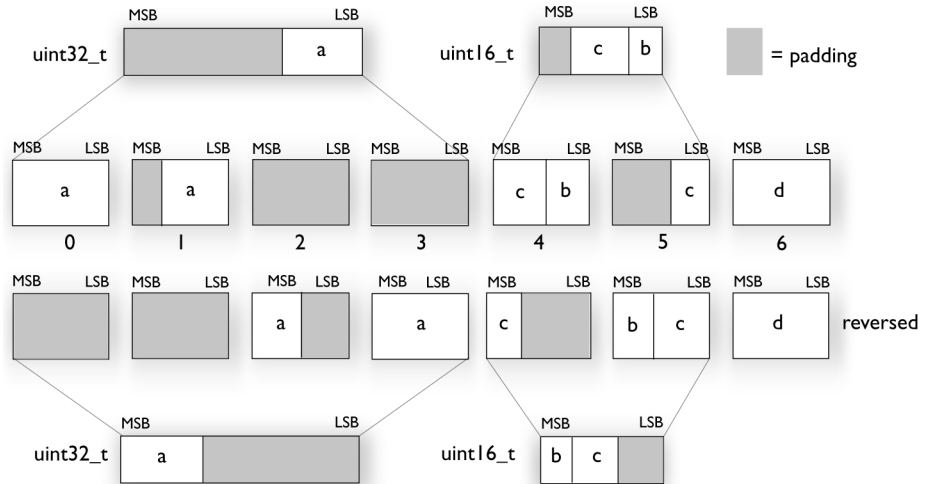

This is the layout of `bitfield_example` in big-endian mode:

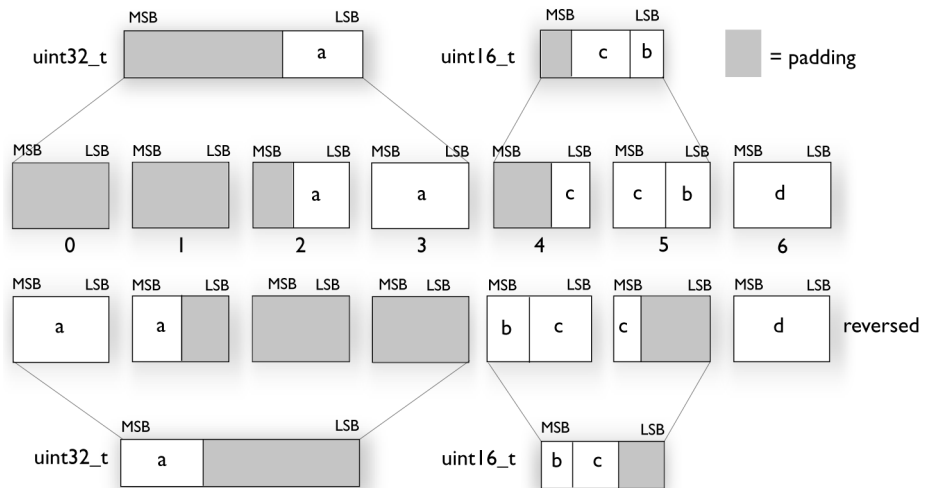

## Basic data types—floating-point types

In the IAR C/C++ Compiler for ARM, floating-point values are represented in standard IEEE 754 format. The sizes for the different floating-point types are:

| Type        | Size    | Range (+/-)                                      | Decimals | Exponent | Manissa | Alignment |
|-------------|---------|--------------------------------------------------|----------|----------|---------|-----------|
| float       | 32 bits | $\pm 1.18\text{E-}38$ to $\pm 3.40\text{E+}38$   | 7        | 8 bits   | 23 bits | 4         |
| double      | 64 bits | $\pm 2.23\text{E-}308$ to $\pm 1.79\text{E+}308$ | 15       | 11 bits  | 52 bits | 8         |
| long double | 64 bits | $\pm 2.23\text{E-}308$ to $\pm 1.79\text{E+}308$ | 15       | 11 bits  | 52 bits | 8         |

Table 33: Floating-point types

For Cortex-M0 and Cortex-M1, the compiler does not support subnormal numbers. All operations that should produce subnormal numbers will instead generate zero. For information about the representation of subnormal numbers for other cores, see *Representation of special floating-point numbers*, page 313.


### FLOATING-POINT ENVIRONMENT

Exception flags for floating-point values are supported for devices with a VFP unit, and they are defined in the `fenv.h` file. For devices without a VFP unit, the functions defined in the `fenv.h` file exist but have no functionality.

The `feraiseexcept` function does not raise an `inexact` floating-point exception when called with `FE_OVERFLOW` or `FE_UNDERFLOW`.

### 32-BIT FLOATING-POINT FORMAT

The representation of a 32-bit floating-point number as an integer is:



The exponent is 8 bits, and the mantissa is 23 bits.

The value of the number is:

$$(-1)^S * 2^{(\text{Exponent}-127)} * 1.\text{Mantissa}$$

The range of the number is at least:


$$\pm 1.18\text{E-}38 \text{ to } \pm 3.39\text{E+}38$$

The precision of the float operators (+, -, \*, and /) is approximately 7 decimal digits.



## 64-BIT FLOATING-POINT FORMAT

The representation of a 64-bit floating-point number as an integer is:



The exponent is 11 bits, and the mantissa is 52 bits.

The value of the number is:

$$(-1)^S * 2^{(\text{Exponent}-1023)} * 1.\text{Mantissa}$$

The range of the number is at least:

$$\pm 2.23\text{E}-308 \text{ to } \pm 1.79\text{E}+308$$

The precision of the float operators (+, -, \*, and /) is approximately 15 decimal digits.

## REPRESENTATION OF SPECIAL FLOATING-POINT NUMBERS

This list describes the representation of special floating-point numbers:

- Zero is represented by zero mantissa and exponent. The sign bit signifies positive or negative zero.
- Infinity is represented by setting the exponent to the highest value and the mantissa to zero. The sign bit signifies positive or negative infinity.
- Not a number (NaN) is represented by setting the exponent to the highest positive value and the most significant bit in the mantissa to 1. The value of the sign bit is ignored.
- Subnormal numbers are used for representing values smaller than what can be represented by normal values. The drawback is that the precision will decrease with smaller values. The exponent is set to 0 to signify that the number is subnormal, even though the number is treated as if the exponent was 1. Unlike normal numbers, subnormal numbers do not have an implicit 1 as the most significant bit (the MSB) of the mantissa. The value of a subnormal number is:

$$(-1)^S * 2^{(1-\text{BIAS})} * 0.\text{Mantissa}$$

where *BIAS* is 127 and 1023 for 32-bit and 64-bit floating-point values, respectively.

---

## Pointer types

The compiler has two basic types of pointers: function pointers and data pointers.

### FUNCTION POINTERS

The size of function pointers is always 32 bits, and the range is 0x0-0xFFFFFFFF.

When function pointer types are declared, attributes are inserted before the \* sign, for example:

```
typedef void (__thumb __interwork * IntHandler) (void);
```

This can be rewritten using #pragma directives:

```
#pragma type_attribute=__thumb __interwork
typedef void IntHandler_function(void);
typedef IntHandler_function *IntHandler;
```

## DATA POINTERS

There is one data pointer available. Its size is 32 bits and the range is 0x0-0xFFFFFFFF.

## CASTING

Casts between pointers have these characteristics:

- Casting a *value* of an integer type to a pointer of a smaller type is performed by truncation
- Casting a pointer type to a smaller integer type is performed by truncation
- Casting a *pointer type* to a larger integer type is performed by zero extension
- Casting a *data pointer* to a function pointer and vice versa is illegal
- Casting a *function pointer* to an integer type gives an undefined result
- Casting a value of an unsigned integer type to a pointer of a larger type is performed by zero extension

### size\_t

`size_t` is the unsigned integer type of the result of the `sizeof` operator. In the IAR C/C++ Compiler for ARM, the type used for `size_t` is unsigned `int`.

### ptrdiff\_t

`ptrdiff_t` is the signed integer type of the result of subtracting two pointers. In the IAR C/C++ Compiler for ARM, the type used for `ptrdiff_t` is the signed integer variant of the `size_t` type.

### intptr\_t

`intptr_t` is a signed integer type large enough to contain a `void *`. In the IAR C/C++ Compiler for ARM, the type used for `intptr_t` is signed long `int`.

### uintptr\_t

`uintptr_t` is equivalent to `intptr_t`, with the exception that it is unsigned.

## Structure types

The members of a `struct` are stored sequentially in the order in which they are declared: the first member has the lowest memory address.

### ALIGNMENT OF STRUCTURE TYPES


The `struct` and `union` types have the same alignment as the member with the highest alignment requirement. Note that this alignment requirement also applies to a member that is a structure. To allow arrays of aligned structure objects, the size of a `struct` is adjusted to an even multiple of the alignment.

### GENERAL LAYOUT

Members of a `struct` are always allocated in the order specified in the declaration. Each member is placed in the `struct` according to the specified alignment (offsets).

```
struct First
{
    char c;
    short s;
} s;
```

This diagram shows the layout in memory:



The alignment of the structure is 2 bytes, and a pad byte must be inserted to give `short s` the correct alignment.

### PACKED STRUCTURE TYPES

The `packed` keyword is used for relaxing the alignment requirements of the members of a structure. This changes the layout of the structure. The members are placed in the same order as when declared, but there might be less pad space between members.

Note that accessing an object that is not correctly aligned requires code that is both larger and slower. If such structure members are accessed many times, it is usually better to construct the correct values in a `struct` that is not packed, and access this `struct` instead.

Special care is also needed when creating and using pointers to misaligned members. For direct access to misaligned members in a packed `struct`, the compiler will emit the correct (but slower and larger) code when needed. However, when a misaligned member is accessed through a pointer to the member, the normal (smaller and faster) code is


used. In the general case, this will not work, because the normal code might depend on the alignment being correct.

This example declares a packed structure:

```
#pragma pack(1)
struct S
{
    char c;
    short s;
};

#pragma pack()
```


The structure `S` has this memory layout:



The next example declares a new non-packed structure, `S2`, that contains the structure `S` declared in the previous example:

```
struct S2
{
    struct S s;
    long l;
};
```

The structure `S2` has this memory layout



The structure `S` will use the memory layout, size, and alignment described in the previous example. The alignment of the member `l` is 4, which means that alignment of the structure `S2` will become 4.

For more information, see *Alignment of elements in a structure*, page 202.

---

## Type qualifiers

According to the C standard, `volatile` and `const` are type qualifiers.

## DECLARING OBJECTS VOLATILE

By declaring an object `volatile`, the compiler is informed that the value of the object can change beyond the compiler's control. The compiler must also assume that any accesses can have side effects—thus all accesses to the `volatile` object must be preserved.

There are three main reasons for declaring an object `volatile`:

- Shared access; the object is shared between several tasks in a multitasking environment
- Trigger access; as for a memory-mapped SFR where the fact that an access occurs has an effect
- Modified access; where the contents of the object can change in ways not known to the compiler.

### Definition of access to volatile objects

The C standard defines an abstract machine, which governs the behavior of accesses to `volatile` declared objects. In general and in accordance to the abstract machine:

- The compiler considers each read and write access to an object declared `volatile` as an access
- The unit for the access is either the entire object or, for accesses to an element in a composite object—such as an array, struct, class, or union—the element. For example:

```
char volatile a;
a = 5; /* A write access */
a += 6; /* First a read then a write access */
```

- An access to a bitfield is treated as an access to the underlying type
- Adding a `const` qualifier to a `volatile` object will make write accesses to the object impossible. However, the object will be placed in RAM as specified by the C standard.

However, these rules are not detailed enough to handle the hardware-related requirements. The rules specific to the IAR C/C++ Compiler for ARM are described below.

### Rules for accesses

In the IAR C/C++ Compiler for ARM, accesses to `volatile` declared objects are subject to these rules:

- All accesses are preserved
- All accesses are complete, that is, the whole object is accessed

- All accesses are performed in the same order as given in the abstract machine
- All accesses are atomic, that is, they cannot be interrupted.

The compiler adheres to these rules for accesses to all 8-, 16-, and 32-bit scalar types, except for accesses to unaligned 16- and 32-bit fields in packed structures.

For all combinations of object types not listed, only the rule that states that all accesses are preserved applies.

## DECLARING OBJECTS VOLATILE AND CONST

If you declare a `volatile` object `const`, it will be write-protected but it will still be stored in RAM memory as the C standard specifies.

To store the object in read-only memory instead, but still make it possible to access it as a `const volatile` object, define the variable like this:

```
const volatile int x @ "FLASH";
```

The compiler will generate the read/write section `FLASH`. That section should be placed in ROM and is used for manually initializing the variables when the application starts up.

Thereafter, the initializers can be reflashed with other values at any time.

## DECLARING OBJECTS CONST

The `const` type qualifier is used for indicating that a data object, accessed directly or via a pointer, is non-writable. A pointer to `const` declared data can point to both constant and non-constant objects. It is good programming practice to use `const` declared pointers whenever possible because this improves the compiler's possibilities to optimize the generated code and reduces the risk of application failure due to erroneously modified data.

Static and global objects declared `const` are allocated in ROM.

In C++, objects that require runtime initialization cannot be placed in ROM.

---

## Data types in C++

In C++, all plain C data types are represented in the same way as described earlier in this chapter. However, if any Embedded C++ features are used for a type, no assumptions can be made concerning the data representation. This means, for example, that it is not supported to write assembler code that accesses class members.

# Extended keywords

- General syntax rules for extended keywords
- Summary of extended keywords
- Descriptions of extended keywords

---

## General syntax rules for extended keywords

The compiler provides a set of attributes that can be used on functions or data objects to support specific features of the ARM core. There are two types of attributes—*type attributes* and *object attributes*:

- Type attributes affect the *external functionality* of the data object or function
- Object attributes affect the *internal functionality* of the data object or function.

The syntax for the keywords differs slightly depending on whether it is a type attribute or an object attribute, and whether it is applied to a data object or a function.

For more information about each attribute, see *Descriptions of extended keywords*, page 323.

**Note:** The extended keywords are only available when language extensions are enabled in the compiler.



In the IDE, language extensions are enabled by default.



Use the `-e` compiler option to enable language extensions. See `-e`, page 247.

### TYPE ATTRIBUTES

Type attributes define how a function is called, or how a data object is accessed. This means that if you use a type attribute, it must be specified both when a function or data object is defined and when it is declared.

You can either place the type attributes explicitly in your declarations, or use the pragma directive `#pragma type_attribute`.

Type attributes can be further divided into *memory type attributes* and *general type attributes*. Memory type attributes are referred to as simply *memory attributes* in the rest of the documentation.

## General type attributes

Available *function type attributes* (affect how the function should be called):

```
__arm, __fiq, __interwork, __irq, __swi, __task, __thumb
```

Available *data type attributes*:

```
__big_endian, __little_endian__packed
```

You can specify as many type attributes as required for each level of pointer indirection.

## Syntax for type attributes used on data objects

Type attributes use almost the same syntax rules as the type qualifiers `const` and `volatile`. For example:

```
__little_endian int i;
int __little_endian j;
```

Both `i` and `j` will be accessed with little-endian byte order.

Unlike `const` and `volatile`, when a type attribute is used before the type specifier in a derived type, the type attribute applies to the object, or typedef itself.

The integer pointed to by `p1` is packed. The variable `p2` is packed, as is the variable `p3`. In the first two cases, the type attribute behaves in the same way as `const` and `volatile` would.

In all cases, if a memory attribute is not specified, an appropriate default memory type is used.

Using a type definition can sometimes make the code clearer:

```
typedef __packed int packed_int;
packed_int *q1;
```

`packed_int` is a typedef for packed integers. The variable `q1` can point to such integers.

You can also use the `#pragma type_attributes` directive to specify type attributes for a declaration. The type attributes specified in the pragma directive are applied to the data object or typedef being declared.

```
#pragma type_attribute=__packed
int * q2;
```

The variable `q2` is packed.



## Syntax for type attributes used on functions

The syntax for using type attributes on functions differs slightly from the syntax of type attributes on data objects. For functions, the attribute must be placed either in front of the return type, or in parentheses, for example:

```
__irq __arm void my_handler(void);
```

or

```
void (__irq __arm my_handler)(void);
```

This declaration of `my_handler` is equivalent with the previous one:

```
#pragma type_attribute=__irq __arm
void my_handler(void);
```

## OBJECT ATTRIBUTES

Normally, object attributes affect the internal functionality of functions and data objects, but not directly how the function is called or how the data is accessed. This means that an object attribute does not normally need to be present in the declaration of an object.

These object attributes are available:

- Object attributes that can be used for variables:

```
__absolute, __no_init
```

- Object attributes that can be used for functions and variables:

```
location, @, __root, __weak
```

- Object attributes that can be used for functions:

```
__intrinsic, __nested, __noreturn, __ramfunc, __stackless
```

You can specify as many object attributes as required for a specific function or data object.

For more information about `location` and `@`, see *Controlling data and function placement in memory*, page 204.

## Syntax for object attributes

The object attribute must be placed in front of the type. For example, to place `myarray` in memory that is not initialized at startup:

```
__no_init int myarray[10];
```

The `#pragma object_attribute` directive can also be used. This declaration is equivalent to the previous one:

```
#pragma object_attribute=__no_init
int myarray[10];
```

**Note:** Object attributes cannot be used in combination with the `typedef` keyword.

---

## Summary of extended keywords

This table summarizes the extended keywords:

| Extended keyword             | Description                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <code>__absolute</code>      | Makes references to the object use absolute addressing                                                                      |
| <code>__arm</code>           | Makes a function execute in ARM mode                                                                                        |
| <code>__big_endian</code>    | Declares a variable to use the big-endian byte order                                                                        |
| <code>__fiq</code>           | Declares a fast interrupt function                                                                                          |
| <code>__interwork</code>     | Declares a function to be callable from both ARM and Thumb mode                                                             |
| <code>__intrinsic</code>     | Reserved for compiler internal use only                                                                                     |
| <code>__irq</code>           | Declares an interrupt function                                                                                              |
| <code>__little_endian</code> | Declares a variable to use the little-endian byte order                                                                     |
| <code>__nested</code>        | Allows an <code>__irq</code> declared interrupt function to be nested, that is, interruptible by the same type of interrupt |
| <code>__no_init</code>       | Places a data object in non-volatile memory                                                                                 |
| <code>__noreturn</code>      | Informs the compiler that the function will not return                                                                      |
| <code>__packed</code>        | Decreases data type alignment to 1                                                                                          |
| <code>__prel</code>          | Used internally by the compiler for constant data when the <code>--ropi</code> compiler option is used                      |
| <code>__ramfunc</code>       | Makes a function execute in RAM                                                                                             |
| <code>__root</code>          | Ensures that a function or variable is included in the object code even if unused                                           |
| <code>__sbrel</code>         | Used internally by the compiler for constant data when the <code>--rwpi</code> compiler option is used                      |
| <code>__stackless</code>     | Makes a function callable without a working stack                                                                           |
| <code>__swi</code>           | Declares a software interrupt function                                                                                      |
| <code>__task</code>          | Relaxes the rules for preserving registers                                                                                  |

Table 34: Extended keywords summary

| Extended keyword     | Description                                      |
|----------------------|--------------------------------------------------|
| <code>__thumb</code> | Makes a function execute in Thumb mode           |
| <code>__weak</code>  | Declares a symbol to be externally weakly linked |

Table 34: Extended keywords summary (Continued)

## Descriptions of extended keywords

These sections give detailed information about each extended keyword.

### `__absolute`

|             |                                                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for object attributes</i> , page 321.                                                                                                                                                                                                                                                                              |
| Description | The <code>__absolute</code> keyword makes references to the object use absolute addressing. The following limitations apply: <ul style="list-style-type: none"> <li>● Only available when the <code>--ropi</code> or <code>--rwp</code> compiler option is used</li> <li>● Can only be used on external declarations.</li> </ul> |
| Example     | <pre>extern __absolute char otherBuffer[100];</pre>                                                                                                                                                                                                                                                                              |

### `__arm`

|             |                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for type attributes used on functions</i> , page 321.                                                                                                                                                                                                                                                                                                                                           |
| Description | The <code>__arm</code> keyword makes a function execute in ARM mode. An <code>__arm</code> declared function can, unless it is also declared <code>__interwork</code> , only be called from functions that also execute in ARM mode. <p>A function declared <code>__arm</code> cannot be declared <code>__thumb</code>.</p> <p><b>Note:</b> Non-interwork ARM functions cannot be called from Thumb mode.</p> |
| Example     | <pre>__arm int func1(void);</pre>                                                                                                                                                                                                                                                                                                                                                                             |
| See also    | <code>__interwork</code> , page 324.                                                                                                                                                                                                                                                                                                                                                                          |

### `__big_endian`

|        |                                                                        |
|--------|------------------------------------------------------------------------|
| Syntax | See <i>Syntax for type attributes used on data objects</i> , page 320. |
|--------|------------------------------------------------------------------------|

**Description** The `__big_endian` keyword is used for accessing a variable that is stored in the big-endian byte order regardless of what byte order the rest of the application uses. The `__big_endian` keyword is available when you compile for ARMv6 or higher.

Note that this keyword cannot be used on pointers. Also, this attribute cannot be used on arrays.

**Example**

```
__big_endian long my_variable;
```

**See also** [\\_\\_little\\_endian](#), page 325.

## **\_\_fiq**

**Syntax** See *Syntax for type attributes used on functions*, page 321.

**Description** The `__fiq` keyword declares a fast interrupt function. All interrupt functions must be compiled in ARM mode. A function declared `__fiq` does not accept parameters and does not have a return value. This keyword is not available when you compile for Cortex-M devices.

**Example**

```
__fiq __arm void interrupt_function(void);
```

## **\_\_interwork**

**Syntax** See *Syntax for type attributes used on functions*, page 321.

**Description** A function declared `__interwork` can be called from functions executing in either ARM or Thumb mode.

**Note:** By default, functions are interwork when the `--interwork` compiler option is used, and when the `--cpu` option is used and it specifies a core where interwork is default.

**Example**

```
typedef void (__thumb __interwork *IntHandler)(void);
```

## **\_\_intrinsic**

**Description** The `__intrinsic` keyword is reserved for compiler internal use only.

## `__irq`

|             |                                                                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for type attributes used on functions</i> , page 321.                                                                                                                                                                                                                           |
| Description | The <code>__irq</code> keyword declares an interrupt function. All interrupt functions must be compiled in ARM mode. A function declared <code>__irq</code> does not accept parameters and does not have a return value. This keyword is not available when you compile for Cortex-M devices. |
| Example     | <pre>__irq __arm void interrupt_function(void);</pre>                                                                                                                                                                                                                                         |
| See also    | <code>--align_sp_on_irq</code> , page 239                                                                                                                                                                                                                                                     |

## `__little_endian`

|             |                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for type attributes used on data objects</i> , page 320.                                                                                                                                                                                                                                                                                                                        |
| Description | The <code>__little_endian</code> keyword is used for accessing a variable that is stored in the little-endian byte order regardless of what byte order the rest of the application uses. The <code>__little_endian</code> keyword is available when you compile for ARMv6 or higher.<br><br>Note that this keyword cannot be used on pointers. Also, this attribute cannot be used on arrays. |
| Example     | <pre>__little_endian long my_variable;</pre>                                                                                                                                                                                                                                                                                                                                                  |
| See also    | <code>__big_endian</code> , page 323.                                                                                                                                                                                                                                                                                                                                                         |

## `__nested`

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for object attributes</i> , page 321.                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description | The <code>__nested</code> keyword modifies the enter and exit code of an interrupt function to allow for nested interrupts. This allows interrupts to be enabled, which means new interrupts can be served inside an interrupt function, without overwriting the SPSR and return address in R14. Nested interrupts are only supported for <code>__irq</code> declared functions.<br><br><b>Note:</b> The <code>__nested</code> keyword requires the processor mode to be in either User or System mode. |
| Example     | <pre>__irq __nested __arm void interrupt_handler(void);</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                           |

See also *Nested interrupts*, page 69 and `--align_sp_on_irq`, page 239.

## `__no_init`

Syntax See *Syntax for object attributes*, page 321.

Description Use the `__no_init` keyword to place a data object in non-volatile memory. This means that the initialization of the variable, for example at system startup, is suppressed.

Example 

```
__no_init int myarray[10];
```

See also *Non-initialized variables*, page 218 and *Do not initialize directive*, page 420.

## `__noreturn`

Syntax See *Syntax for object attributes*, page 321.

Description The `__noreturn` keyword can be used on a function to inform the compiler that the function will not return. If you use this keyword on such functions, the compiler can optimize more efficiently. Examples of functions that do not return are `abort` and `exit`.

**Note:** At optimization levels medium or high, the `__noreturn` keyword might cause incorrect call stack debug information at any point where it can be determined that the current function cannot return.

Example 

```
__noreturn void terminate(void);
```

## `__packed`

Syntax See *Syntax for type attributes used on data objects*, page 320. An exception is when the keyword is used for modifying the structure type in a `struct` or `union` declarations, see below.

Description Use the `__packed` keyword to specify a data alignment of 1 for a data type. `__packed` can be used in two ways:

- When used before the `struct` or `union` keyword in a structure definition, the maximum alignment of each member in the structure is set to 1, eliminating the need for gaps between the members. The type of each member also receives the `__packed` type attribute.

You can also use the `__packed` keyword with structure declarations, but it is illegal to refer to a structure type defined without the `__packed` keyword using a structure declaration with the `__packed` keyword.

- When used in any other position, it follows the syntax rules for type attributes, and affects a type in its entirety. A type with the `__packed` type attribute is the same as the type attribute without the `__packed` type attribute, except that it has a data alignment of 1. Types that already have an alignment of 1 are not affected by the `__packed` type attribute.

A normal pointer can be implicitly converted to a pointer to `__packed`, but the reverse conversion requires a cast.

**Note:** Accessing data types at other alignments than their natural alignment can result in code that is significantly larger and slower.

Use either `__packed` or `#pragma pack` to relax the alignment restrictions for a type and the objects defined using that type. Mixing `__packed` and `#pragma pack` might lead to unexpected behavior.

#### Example

```
/* No pad bytes in X: */
__packed struct X { char ch; int i; };
/* __packed is optional here: */
struct X * xp;

/* NOTE: no __packed: */
struct Y { char ch; int i; };
/* ERROR: Y not defined with __packed: */
__packed struct Y * yp ;

/* Member 'i' has alignment 1: */
struct Z { char ch; __packed int i; };

void Foo(struct X * xp)
{
    /* Error:"int *" -> "int __packed *" not allowed: */
    int * p1 = xp->i;
    /* OK: */
    int __packed * p2 = &xp->i;
    /* OK, char not affected */
    char * p3 = &xp->ch;
}
```

See also

*pack*, page 347.


## **\_\_ramfunc**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for type attributes used on functions</i> , page 321.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description | <p>The <code>__ramfunc</code> keyword makes a function execute in RAM. Two code sections will be created: one for the RAM execution (<code>.textrw</code>), and one for the ROM initialization (<code>.textrw_init</code>).</p> <p>If a function declared <code>__ramfunc</code> tries to access ROM, the compiler will issue a warning. This behavior is intended to simplify the creation of <i>upgrade</i> routines, for instance, rewriting parts of flash memory. If this is not why you have declared the function <code>__ramfunc</code>, you can safely ignore or disable these warnings.</p> <p>Functions declared <code>__ramfunc</code> are by default stored in the section named <code>.textrw</code>.</p> |
| Example     | <pre>__ramfunc int FlashPage(char * data, char * page);</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| See also    | The <i>C-SPY® Debugging Guide for ARM</i> to read more about <code>__ramfunc</code> declared functions in relation to breakpoints.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

## **\_\_root**

|             |                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for object attributes</i> , page 321.                                                                                                                                                                                                           |
| Description | A function or variable with the <code>__root</code> attribute is kept whether or not it is referenced from the rest of the application, provided its module is included. Program modules are always included and library modules are only included if needed. |
| Example     | <pre>__root int myarray[10];</pre>                                                                                                                                                                                                                            |
| See also    | For more information about root symbols and how they are kept, see <i>Keeping symbols and sections</i> , page 94.                                                                                                                                             |

## **\_\_stackless**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | See <i>Syntax for object attributes</i> , page 321.                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description | <p>The <code>__stackless</code> keyword declares a function that can be called without a working stack.</p> <p> A function declared <code>__stackless</code> violates the calling convention in such a way that it is not possible to return from it. However, the compiler cannot reliably detect if the function returns and will not issue an error if it does.</p> |



Example `__stackless void start_application(void);`

## **\_\_swi**

Syntax See *Syntax for type attributes used on functions*, page 321.

Description The `__swi` declares a software interrupt function. It inserts an `SVC` (formerly `SWI`) instruction and the specified software interrupt number to make a proper function call. A function declared `__swi` accepts arguments and returns values. The `__swi` keyword makes the compiler generate the correct return sequence for a specific software interrupt function. Software interrupt functions follow the same calling convention regarding parameters and return values as an ordinary function, except for the stack usage.

The `__swi` keyword also expects a software interrupt number which is specified with the `#pragma swi_number=number` directive. The `swi_number` is used as an argument to the generated assembler `SVC` instruction, and can be used by the `SVC` interrupt handler, for example `SWI_Handler`, to select one software interrupt function in a system containing several such functions. Note that the software interrupt number should only be specified in the function declaration—typically, in a header file that you include in the source code file that calls the interrupt function—not in the function definition.

**Note:** All interrupt functions must be compiled in ARM mode, except for Cortex-M. Use either the `__arm` keyword or the `#pragma type_attribute=__arm` directive to alter the default behavior if needed.

Example To declare your software interrupt function, typically in a header file, write for example like this:

```
#pragma swi_number=0x23
__swi int swi0x23_function(int a, int b);
...
```

To call the function:

```
...
int x = swi0x23_function(1, 2); /* Will be replaced by SVC 0x23,
                               hence the linker will never
                               try to locate the
                               swi0x23_function */
...
```

Somewhere in your application source code, you define your software interrupt function:

```
...
__swi __arm int the_actual_swi0x23_function(int a, int b)
{
    ...
    return 42;
}
```

See also *Software interrupts*, page 70 and *Calling convention*, page 153.

## **\_\_task**

Syntax See *Syntax for type attributes used on functions*, page 321.

Description This keyword allows functions to relax the rules for preserving registers. Typically, the keyword is used on the start function for a task in an RTOS.

Because a function declared `__task` can corrupt registers that are needed by the calling function, you should only use `__task` on functions that do not return or call such a function from assembler code.

The function `main` can be declared `__task`, unless it is explicitly called from the application. In real-time applications with more than one task, the root function of each task can be declared `__task`.

Example `__task void my_handler(void);`

## **\_\_thumb**

Syntax See *Syntax for type attributes used on functions*, page 321.

Description The `__thumb` keyword makes a function execute in Thumb mode. Unless the function is also declared `__interwork`, the function declared `__thumb` can only be called from functions that also execute in Thumb mode.

A function declared `__thumb` cannot be declared `__arm`.

**Note:** Non-interwork Thumb functions cannot be called from ARM mode.

Example `__thumb int func2(void);`

See also `__interwork`, page 324.

## **\_\_weak**

### Syntax

See *Syntax for object attributes*, page 321.

### Description

Using the `__weak` object attribute on an external declaration of a symbol makes all references to that symbol in the module weak.

Using the `__weak` object attribute on a public definition of a symbol makes that definition a weak definition.

The linker will not include a module from a library solely to satisfy weak references to a symbol, nor will the lack of a definition for a weak reference result in an error. If no definition is included, the address of the object will be zero.

When linking, a symbol can have any number of weak definitions, and at most one non-weak definition. If the symbol is needed, and there is a non-weak definition, this definition will be used. If there is no non-weak definition, one of the weak definitions will be used.

### Example

```
extern __weak int foo; /* A weak reference. */

__weak void bar(void) /* A weak definition. */
{
    /* Increment foo if it was included. */
    if (&foo != 0)
        ++foo;
}
```



# Pragma directives

- Summary of pragma directives
- Descriptions of pragma directives

---

## Summary of pragma directives

The `#pragma` directive is defined by Standard C and is a mechanism for using vendor-specific extensions in a controlled way to make sure that the source code is still portable.

The pragma directives control the behavior of the compiler, for example how it allocates memory for variables and functions, whether it allows extended keywords, and whether it outputs warning messages.

The pragma directives are always enabled in the compiler.

This table lists the pragma directives of the compiler that can be used either with the `#pragma` preprocessor directive or the `_Pragma()` preprocessor operator:

| Pragma directive                         | Description                                                                                                                                    |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>bitfields</code>                   | Controls the order of bitfield members.                                                                                                        |
| <code>calls</code>                       | Lists possible called functions for indirect calls.                                                                                            |
| <code>call_graph_root</code>             | Specifies that the function is a call graph root.                                                                                              |
| <code>data_alignment</code>              | Gives a variable a higher (more strict) alignment.                                                                                             |
| <code>default_function_attributes</code> | Sets default type and object attributes for declarations and definitions of functions.                                                         |
| <code>default_no_bounds</code>           | Applies <code>#pragma no_bounds</code> to a whole set of functions. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> . |
| <code>default_variable_attributes</code> | Sets default type and object attributes for declarations and definitions of variables.                                                         |
| <code>define_with_bounds</code>          | Instruments a function to track pointer bounds. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .                     |

*Table 35: Pragma directives summary*

| Pragma directive                           | Description                                                                                                                                                            |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>define_without_bounds</code>         | Defines the version of a function that does not have extra bounds information. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .              |
| <code>diag_default</code>                  | Changes the severity level of diagnostic messages.                                                                                                                     |
| <code>diag_error</code>                    | Changes the severity level of diagnostic messages.                                                                                                                     |
| <code>diag_remark</code>                   | Changes the severity level of diagnostic messages.                                                                                                                     |
| <code>diag_suppress</code>                 | Suppresses diagnostic messages.                                                                                                                                        |
| <code>diag_warning</code>                  | Changes the severity level of diagnostic messages.                                                                                                                     |
| <code>disable_check</code>                 | Specifies that the immediately following function does not check accesses against bounds. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .   |
| <code>error</code>                         | Signals an error while parsing.                                                                                                                                        |
| <code>generate_entry_without_bounds</code> | Enables generation of an extra entry without bounds for the immediately following function. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> . |
| <code>include_alias</code>                 | Specifies an alias for an include file.                                                                                                                                |
| <code>inline</code>                        | Controls inlining of a function.                                                                                                                                       |
| <code>language</code>                      | Controls the IAR Systems language extensions.                                                                                                                          |
| <code>location</code>                      | Specifies the absolute address of a variable, places a variable in a register, or places groups of functions or variables in named sections.                           |
| <code>message</code>                       | Prints a message.                                                                                                                                                      |
| <code>no_bounds</code>                     | Specifies that the immediately following function is not instrumented for bounds checking. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .  |
| <code>object_attribute</code>              | Adds object attributes to the declaration or definition of a variable or function.                                                                                     |
| <code>optimize</code>                      | Specifies the type and level of an optimization.                                                                                                                       |
| <code>pack</code>                          | Specifies the alignment of structures and union members.                                                                                                               |
| <code>__printf_args</code>                 | Verifies that a function with a printf-style format string is called with the correct arguments.                                                                       |

Table 35: Pragma directives summary (Continued)

| Pragma directive                   | Description                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------|
| <code>public_equ</code>            | Defines a public assembler label and gives it a value.                                          |
| <code>required</code>              | Ensures that a symbol that is needed by another symbol is included in the linked output.        |
| <code>rtmodel</code>               | Adds a runtime model attribute to the module.                                                   |
| <code>__scanf_args</code>          | Verifies that a function with a scanf-style format string is called with the correct arguments. |
| <code>section</code>               | Declares a section name to be used by intrinsic functions.                                      |
| <code>segment</code>               | This directive is an alias for <code>#pragma section</code> .                                   |
| <code>STDC CX_LIMITED_RANGE</code> | Specifies whether the compiler can use normal complex mathematical formulas or not.             |
| <code>STDC FENV_ACCESS</code>      | Specifies whether your source code accesses the floating-point environment or not.              |
| <code>STDC FP_CONTRACT</code>      | Specifies whether the compiler is allowed to contract floating-point expressions or not.        |
| <code>swi_number</code>            | Sets the interrupt number of a software interrupt.                                              |
| <code>vectorize</code>             | Enables or disables generation of NEON vector instructions for a loop.                          |
| <code>weak</code>                  | Makes a definition a weak definition, or creates a weak alias for a function or a variable.     |
| <code>type_attribute</code>        | Adds type attributes to a declaration or to definitions.                                        |

Table 35: Pragma directives summary (Continued)

**Note:** For portability reasons, see also *Recognized pragma directives (6.10.6)*, page 486.

## Descriptions of pragma directives

This section gives detailed information about each pragma directive.

### bitfields

Syntax

```
#pragma bitfields=disjoint_types|joined_types|
reversed_disjoint_types|reversed|default}
```

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters  | <p><code>disjoint_types</code>      Bitfield members are placed from the least significant bit to the most significant bit in the container type. Storage containers of bitfields with different base types will not overlap.</p> <p><code>joined_types</code>          Bitfield members are placed depending on the byte order. Storage containers of bitfields will overlap other structure members. For more information, see <i>Bitfields</i>, page 308.</p> <p><code>reversed_disjoint_types</code> Bitfield members are placed from the most significant bit to the least significant bit in the container type. Storage containers of bitfields with different base types will not overlap.</p> <p><code>reversed</code>                This is an alias for <code>reversed_disjoint_types</code>.</p> <p><code>default</code>                 Restores to default layout of bitfield members. The default behavior for the compiler is <code>joined_types</code>.</p> |
| Description | Use this pragma directive to control the layout of bitfield members.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Example     | <pre>#pragma bitfields=disjoint_types /* Structure that uses disjoint bitfield types. */ struct S {     unsigned char  error : 1;     unsigned char  size  : 4;     unsigned short code  : 10; }; #pragma bitfields=default /* Restores to default setting. */</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| See also    | <i>Bitfields</i> , page 308.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## calls

|             |                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma calls=function[, function...]</code>                                                                                                                             |
| Parameters  | <p><code>function</code>                Any declared function</p>                                                                                                              |
| Description | Use this pragma directive to list the functions that can be indirectly called in the following statement. This information can be used for stack usage analysis in the linker. |



**Note:** For an accurate result, you must list all possible called functions.

|         |                                                                                                          |
|---------|----------------------------------------------------------------------------------------------------------|
| Example | <pre>void Fun1(), Fun2();  void Caller(void (*fp)(void)) { #pragma calls = Fun1, Fun2   (*fp)(); }</pre> |
|---------|----------------------------------------------------------------------------------------------------------|

|          |                                       |
|----------|---------------------------------------|
| See also | <i>Stack usage analysis</i> , page 84 |
|----------|---------------------------------------|

## call\_graph\_root

|        |                                                  |
|--------|--------------------------------------------------|
| Syntax | <code>#pragma call_graph_root [=category]</code> |
|--------|--------------------------------------------------|

|                 |                                                                                                                                                                     |                 |                                                               |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------|
| Parameters      | <table border="0"> <tr> <td style="padding-right: 20px;"><i>category</i></td> <td>A string that identifies an optional call graph root category</td> </tr> </table> | <i>category</i> | A string that identifies an optional call graph root category |
| <i>category</i> | A string that identifies an optional call graph root category                                                                                                       |                 |                                                               |

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Use this pragma directive to specify that, for stack usage analysis purposes, the immediately following function is a call graph root. You can also specify an optional category. The compiler will usually automatically assign a call graph root category to interrupt and task functions. If you use the <code>#pragma call_graph_root</code> directive on such a function you will override the default category. You can specify any string as a category. |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|         |                                                  |
|---------|--------------------------------------------------|
| Example | <code>#pragma call_graph_root="interrupt"</code> |
|---------|--------------------------------------------------|

|          |                                       |
|----------|---------------------------------------|
| See also | <i>Stack usage analysis</i> , page 84 |
|----------|---------------------------------------|

## data\_alignment

|        |                                                |
|--------|------------------------------------------------|
| Syntax | <code>#pragma data_alignment=expression</code> |
|--------|------------------------------------------------|

|                   |                                                                                                                                                                  |                   |                                                          |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------------------------------------|
| Parameters        | <table border="0"> <tr> <td style="padding-right: 20px;"><i>expression</i></td> <td>A constant which must be a power of two (1, 2, 4, etc.).</td> </tr> </table> | <i>expression</i> | A constant which must be a power of two (1, 2, 4, etc.). |
| <i>expression</i> | A constant which must be a power of two (1, 2, 4, etc.).                                                                                                         |                   |                                                          |

|             |                                                                                                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Use this pragma directive to give a variable a higher (more strict) alignment of the start address than it would otherwise have. This directive can be used on variables with static and automatic storage duration. |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

When you use this directive on variables with automatic storage duration, there is an upper limit on the allowed alignment for each function, determined by the calling convention used.

**Note:** Normally, the size of a variable is a multiple of its alignment. The `data_alignment` directive only affects the alignment of the variable's start address, and not its size, and can thus be used for creating situations where the size is not a multiple of the alignment.

## default\_function\_attributes

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <pre>#pragma default_function_attributes=[ attribute...]</pre> <p>where <i>attribute</i> can be:</p> <pre>type_attribute object_attribute @ section_name</pre>                                                                                                                                                                                                                                                                                                                                                        |
| Parameters  | <pre>type_attribute</pre> See <i>Type attributes</i> , page 319.<br><pre>object_attribute</pre> See <i>Object attributes</i> , page 321.<br><pre>@ section_name</pre> See <i>Data and function placement in sections</i> , page 206.                                                                                                                                                                                                                                                                                  |
| Description | <p>Use this pragma directive to set default section placement, type attributes, and object attributes for function declarations and definitions. The default settings are only used for declarations and definitions that do not specify type or object attributes or location in some other way.</p> <p>Specifying a <code>default_function_attributes</code> pragma directive with no attributes, restores the initial state where no such defaults have been applied to function declarations and definitions.</p> |
| Example     | <pre>/* Place following functions in section MYSEC */ #pragma default_function_attributes = @ "MYSEC" int fun1(int x) { return x + 1; } int fun2(int x) { return x - 1; } /* Stop placing functions into MYSEC */ #pragma default_function_attributes =</pre> <p>has the same effect as:</p> <pre>int fun1(int x) @ "MYSEC" { return x + 1; } int fun2(int x) @ "MYSEC" { return x - 1; }</pre>                                                                                                                       |

See also *location*, page 344  
*object\_attribute*, page 345  
*type\_attribute*, page 353

## default\_variable\_attributes

**Syntax** `#pragma default_variable_attributes=[ attribute...]`  
 where *attribute* can be:  
`type_attribute`  
`object_attribute`  
`@ section_name`

**Parameters**

|                                |                                                                |
|--------------------------------|----------------------------------------------------------------|
| <code>type_attribute</code>    | See <i>Type attributes</i> , page 319.                         |
| <code>object_attributes</code> | See <i>Object attributes</i> , page 321.                       |
| <code>@ section_name</code>    | See <i>Data and function placement in sections</i> , page 206. |

**Description**

Use this pragma directive to set default section placement, type attributes, and object attributes for declarations and definitions of variables with static storage duration. The default settings are only used for declarations and definitions that do not specify type or object attributes or location in some other way.

Specifying a `default_variable_attributes` pragma with no attributes restores the initial state of no such defaults being applied to variables with static storage duration.

**Example**

```
/* Place following variables in section MYSEC */
#pragma default_variable_attributes = @ "MYSEC"
int var1 = 42;
int var2 = 17;
/* Stop placing variables into MYSEC */
#pragma default_variable_attributes =
```

has the same effect as:

```
int var1 @ "MYSEC" = 42;
int var2 @ "MYSEC" = 17;
```

See also *location*, page 344  
*object\_attribute*, page 345  
*type\_attribute*, page 353

## diag\_default

|             |                                                                                                                                                                                                                                                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma diag_default=tag[, tag, ...]</code>                                                                                                                                                                                                                                                                                     |
| Parameters  | <p><i>tag</i>                      The number of a diagnostic message, for example the message number Pe177.</p>                                                                                                                                                                                                                      |
| Description | Use this pragma directive to change the severity level back to the default, or to the severity level defined on the command line by any of the options <code>--diag_error</code> , <code>--diag_remark</code> , <code>--diag_suppress</code> , or <code>--diag_warnings</code> , for the diagnostic messages specified with the tags. |
| See also    | <i>Diagnostics</i> , page 226.                                                                                                                                                                                                                                                                                                        |

## diag\_error

|             |                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma diag_error=tag[, tag, ...]</code>                                                                  |
| Parameters  | <p><i>tag</i>                      The number of a diagnostic message, for example the message number Pe177.</p> |
| Description | Use this pragma directive to change the severity level to <code>error</code> for the specified diagnostics.      |
| See also    | <i>Diagnostics</i> , page 226.                                                                                   |

## diag\_remark

|             |                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma diag_remark=tag[, tag, ...]</code>                                                                     |
| Parameters  | <p><i>tag</i>                      The number of a diagnostic message, for example the message number Pe177.</p>     |
| Description | Use this pragma directive to change the severity level to <code>remark</code> for the specified diagnostic messages. |
| See also    | <i>Diagnostics</i> , page 226.                                                                                       |

## diag\_suppress

|             |                                                                                      |
|-------------|--------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma diag_suppress=tag[, tag, ...]</code>                                   |
| Parameters  | <i>tag</i> The number of a diagnostic message, for example the message number Pe117. |
| Description | Use this pragma directive to suppress the specified diagnostic messages.             |
| See also    | <i>Diagnostics</i> , page 226.                                                       |

## diag\_warning

|             |                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma diag_warning=tag[, tag, ...]</code>                                                                     |
| Parameters  | <i>tag</i> The number of a diagnostic message, for example the message number Pe826.                                  |
| Description | Use this pragma directive to change the severity level to <code>warning</code> for the specified diagnostic messages. |
| See also    | <i>Diagnostics</i> , page 226.                                                                                        |

## error

|             |                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma error message</code>                                                                                                                                                                                                                                                                                                                    |
| Parameters  | <i>message</i> A string that represents the error message.                                                                                                                                                                                                                                                                                            |
| Description | Use this pragma directive to cause an error message when it is parsed. This mechanism is different from the preprocessor directive <code>#error</code> , because the <code>#pragma error</code> directive can be included in a preprocessor macro using the <code>_Pragma</code> form of the directive and only causes an error if the macro is used. |

Example

```
#if FOO_AVAILABLE
#define FOO ...
#else
#define FOO _Pragma("error\Foo is not available")
#endif
```

If `FOO_AVAILABLE` is zero, an error will be signaled if the `FOO` macro is used in actual source code.

## include\_alias

Syntax

```
#pragma include_alias ("orig_header" , "subst_header")
#pragma include_alias (<orig_header> , <subst_header>)
```

Parameters

|                     |                                                                  |
|---------------------|------------------------------------------------------------------|
| <i>orig_header</i>  | The name of a header file for which you want to create an alias. |
| <i>subst_header</i> | The alias for the original header file.                          |

Description

Use this pragma directive to provide an alias for a header file. This is useful for substituting one header file with another, and for specifying an absolute path to a relative file.

This pragma directive must appear before the corresponding `#include` directives and `subst_header` must match its corresponding `#include` directive exactly.

Example

```
#pragma include_alias (<stdio.h> , <C:\MyHeaders\stdio.h>)
#include <stdio.h>
```

This example will substitute the relative file `stdio.h` with a counterpart located according to the specified path.

See also

*Include file search procedure*, page 223.

## inline

Syntax

```
#pragma inline[=forced|=never]
```

Parameters

|                     |                                                         |
|---------------------|---------------------------------------------------------|
| No parameter        | Has the same effect as the <code>inline</code> keyword. |
| <code>forced</code> | Disables the compiler's heuristics and forces inlining. |

|             |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | <code>never</code> | Disables the compiler's heuristics and makes sure that the function will not be inlined.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description |                    | Use <code>#pragma inline</code> to advise the compiler that the function defined immediately after the directive should be inlined according to C++ inline semantics.<br><br>Specifying <code>#pragma inline=forced</code> will always inline the defined function. If the compiler fails to inline the function for some reason, for example due to recursion, a warning message is emitted.<br><br>Inlining is normally performed only on the High optimization level. Specifying <code>#pragma inline=forced</code> will enable inlining of the function also on the Medium optimization level. |
| See also    |                    | <i>Inlining functions</i> , page 71.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## language

|             |                           |                                                                                                                                                                                                                                                                                 |
|-------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      |                           | <code>#pragma language={extended default save restore}</code>                                                                                                                                                                                                                   |
| Parameters  |                           |                                                                                                                                                                                                                                                                                 |
|             | <code>extended</code>     | Enables the IAR Systems language extensions from the first use of the pragma directive and onward.                                                                                                                                                                              |
|             | <code>default</code>      | From the first use of the pragma directive and onward, restores the settings for the IAR Systems language extensions to whatever that was specified by compiler options.                                                                                                        |
|             | <code>save restore</code> | Saves and restores, respectively, the IAR Systems language extensions setting around a piece of source code.<br><br>Each use of <code>save</code> must be followed by a matching <code>restore</code> in the same file without any intervening <code>#include</code> directive. |
| Description |                           | Use this pragma directive to control the use of language extensions.                                                                                                                                                                                                            |
| Example     |                           | At the top of a file that needs to be compiled with IAR Systems extensions enabled:<br><br><pre>#pragma language=extended /* The rest of the file. */</pre>                                                                                                                     |

Around a particular part of the source code that needs to be compiled with IAR Systems extensions enabled, but where the state before the sequence cannot be assumed to be the same as that specified by the compiler options in use:

```
#pragma language=save
#pragma language=extended
/* Part of source code. */
#pragma language=restore
```

See also

*-e*, page 247 and *--strict*, page 270.

## location

Syntax

```
#pragma location={address|register|NAME}
```

Parameters

|                 |                                                                                                            |
|-----------------|------------------------------------------------------------------------------------------------------------|
| <i>address</i>  | The absolute address of the global or static variable or function for which you want an absolute location. |
| <i>register</i> | An identifier that corresponds to one of the ARM core registers R4–R11.                                    |
| <i>NAME</i>     | A user-defined section name; cannot be a section name predefined for use by the compiler and linker.       |

Description

Use this pragma directive to specify:

- The location—the absolute address—of the global or static variable whose declaration follows the pragma directive. The variables must be declared `__no_init`.
- An identifier specifying a register. The variable defined after the pragma directive is placed in the register. The variable must be declared as `__no_init` and have file scope.

A string specifying a section for placing either a variable or function whose declaration follows the pragma directive. Do not place variables that would normally be in different sections (for example, variables declared as `__no_init` and variables declared as `const`) in the same named section.



**Example**

```
#pragma location=0xFFFF0400
__no_init volatile char PORT1; /* PORT1 is located at address
                                0xFFFF0400 */

#pragma location=R8
__no_init int TASK; /* TASK is placed in R8 */

#pragma location="FLASH"
char PORT2; /* PORT2 is located in section FLASH */

/* A better way is to use a corresponding mechanism */
#define FLASH _Pragma("location=\"FLASH\"")
/* ... */
FLASH int i; /* i is placed in the FLASH section */
```

**See also** *Controlling data and function placement in memory*, page 204 and *Declare and place your own sections*, page 93.

## message

**Syntax** `#pragma message(message)`

**Parameters**

*message*                      The message that you want to direct to the standard output stream.

**Description**                Use this pragma directive to make the compiler print a message to the standard output stream when the file is compiled.

**Example**

```
#ifdef TESTING
#pragma message("Testing")
#endif
```

## object\_attribute

**Syntax** `#pragma object_attribute=object_attribute[ object_attribute...]`

**Parameters**                    For information about object attributes that can be used with this pragma directive, see *Object attributes*, page 321.

**Description**                    Use this pragma directive to add one or more IAR-specific object attributes to the declaration or definition of a variable or function. Object attributes affect the actual

variable or function and not its type. When you define a variable or function, the union of the object attributes from all declarations including the definition, is used.

**Example**

```
#pragma object_attribute=__no_init
char bar;
```

is equivalent to:

```
__no_init char bar;
```

**See also**

*General syntax rules for extended keywords*, page 319.

## optimize

**Syntax**

```
#pragma optimize=[goal] [level] [no_optimization...]
```

**Parameters**

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>goal</i>            | <p>Choose between:</p> <ul style="list-style-type: none"> <li><i>size</i>, optimizes for size</li> <li><i>balanced</i>, optimizes balanced between speed and size</li> <li><i>speed</i>, optimizes for speed.</li> <li><i>no_size_constraints</i>, optimizes for speed, but relaxes the normal restrictions for code size expansion.</li> </ul>                                                                                                                                                                                                                                                                            |
| <i>level</i>           | <p>Specifies the level of optimization; choose between <i>none</i>, <i>low</i>, <i>medium</i>, or <i>high</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <i>no_optimization</i> | <p>Disables one or several optimizations; choose between:</p> <ul style="list-style-type: none"> <li><i>no_code_motion</i>, disables code motion</li> <li><i>no_cse</i>, disables common subexpression elimination</li> <li><i>no_inline</i>, disables function inlining</li> <li><i>no_tbaa</i>, disables type-based alias analysis</li> <li><i>no_unroll</i>, disables loop unrolling</li> <li><i>no_vectorize</i>, disables generation of NEON vector instructions</li> <li><i>no_scheduling</i>, disables instruction scheduling.</li> <li><i>vectorize</i>, enables generation of NEON vector instructions</li> </ul> |

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Use this pragma directive to decrease the optimization level, or to turn off some specific optimizations. This pragma directive only affects the function that follows immediately after the directive.</p> <p>The parameters <code>size</code>, <code>balanced</code>, <code>speed</code>, and <code>no_size_constraints</code> only have effect on the <code>high</code> optimization level and only one of them can be used as it is not possible to optimize for speed and size at the same time. It is also not possible to use preprocessor macros embedded in this pragma directive. Any such macro will not be expanded by the preprocessor.</p> <p><b>Note:</b> If you use the <code>#pragma optimize</code> directive to specify an optimization level that is higher than the optimization level you specify using a compiler option, the pragma directive is ignored.</p> |
| Example     | <pre>#pragma optimize=speed int SmallAndUsedOften() {     /* Do something here. */ }  #pragma optimize=size int BigAndSeldomUsed() {     /* Do something here. */ }</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| See also    | <i>Fine-tuning enabled transformations</i> , page 211.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## pack

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                       |                                                                 |            |                                             |                   |                                      |                  |                                                                      |                          |                                              |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------|------------|---------------------------------------------|-------------------|--------------------------------------|------------------|----------------------------------------------------------------------|--------------------------|----------------------------------------------|
| Syntax                   | <pre>#pragma pack(<i>n</i>) #pragma pack() #pragma pack({push pop}[ ,<i>name</i>] [ ,<i>n</i>])</pre>                                                                                                                                                                                                                                                                                                                                                                                                                             |                       |                                                                 |            |                                             |                   |                                      |                  |                                                                      |                          |                                              |
| Parameters               | <table> <tr> <td><code><i>n</i></code></td> <td>Sets an optional structure alignment; one of: 1, 2, 4, 8, or 16</td> </tr> <tr> <td>Empty list</td> <td>Restores the structure alignment to default</td> </tr> <tr> <td><code>push</code></td> <td>Sets a temporary structure alignment</td> </tr> <tr> <td><code>pop</code></td> <td>Restores the structure alignment from a temporarily pushed alignment</td> </tr> <tr> <td><code><i>name</i></code></td> <td>An optional pushed or popped alignment label</td> </tr> </table> | <code><i>n</i></code> | Sets an optional structure alignment; one of: 1, 2, 4, 8, or 16 | Empty list | Restores the structure alignment to default | <code>push</code> | Sets a temporary structure alignment | <code>pop</code> | Restores the structure alignment from a temporarily pushed alignment | <code><i>name</i></code> | An optional pushed or popped alignment label |
| <code><i>n</i></code>    | Sets an optional structure alignment; one of: 1, 2, 4, 8, or 16                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                       |                                                                 |            |                                             |                   |                                      |                  |                                                                      |                          |                                              |
| Empty list               | Restores the structure alignment to default                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                       |                                                                 |            |                                             |                   |                                      |                  |                                                                      |                          |                                              |
| <code>push</code>        | Sets a temporary structure alignment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                       |                                                                 |            |                                             |                   |                                      |                  |                                                                      |                          |                                              |
| <code>pop</code>         | Restores the structure alignment from a temporarily pushed alignment                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                       |                                                                 |            |                                             |                   |                                      |                  |                                                                      |                          |                                              |
| <code><i>name</i></code> | An optional pushed or popped alignment label                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                       |                                                                 |            |                                             |                   |                                      |                  |                                                                      |                          |                                              |

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Use this pragma directive to specify the maximum alignment of <code>struct</code> and <code>union</code> members.</p> <p>The <code>#pragma pack</code> directive affects declarations of structures following the pragma directive to the next <code>#pragma pack</code> or the end of the compilation unit.</p> <p><b>Note:</b> This can result in significantly larger and slower code when accessing members of the structure.</p> <p>Use either <code>__packed</code> or <code>#pragma pack</code> to relax the alignment restrictions for a type and the objects defined using that type. Mixing <code>__packed</code> and <code>#pragma pack</code> might lead to unexpected behavior.</p> |
| See also    | <i>Structure types</i> , page 315.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## \_\_printf\_args

|             |                                                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma __printf_args</code>                                                                                                                                                                                                                    |
| Description | Use this pragma directive on a function with a <code>printf</code> -style format string. For any call to that function, the compiler verifies that the argument to each conversion specifier (for example <code>%d</code> ) is syntactically correct. |
| Example     | <pre>#pragma __printf_args int printf(char const *,...);  void PrintNumbers(unsigned short x) {     printf("%d", x); /* Compiler checks that x is an integer */ }</pre>                                                                               |

## public\_equ

|               |                                                                                                                                                                                                                                                                                                   |               |                                                          |              |                                                                          |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------|--------------|--------------------------------------------------------------------------|
| Syntax        | <code>#pragma public_equ="symbol", value</code>                                                                                                                                                                                                                                                   |               |                                                          |              |                                                                          |
| Parameters    | <table> <tr> <td style="vertical-align: top;"><i>symbol</i></td> <td>The name of the assembler symbol to be defined (string).</td> </tr> <tr> <td style="vertical-align: top;"><i>value</i></td> <td>The value of the defined assembler symbol (integer constant expression).</td> </tr> </table> | <i>symbol</i> | The name of the assembler symbol to be defined (string). | <i>value</i> | The value of the defined assembler symbol (integer constant expression). |
| <i>symbol</i> | The name of the assembler symbol to be defined (string).                                                                                                                                                                                                                                          |               |                                                          |              |                                                                          |
| <i>value</i>  | The value of the defined assembler symbol (integer constant expression).                                                                                                                                                                                                                          |               |                                                          |              |                                                                          |
| Description   | Use this pragma directive to define a public assembler label and give it a value.                                                                                                                                                                                                                 |               |                                                          |              |                                                                          |
| Example       | <code>#pragma public_equ="MY_SYMBOL", 0x123456</code>                                                                                                                                                                                                                                             |               |                                                          |              |                                                                          |

See also `--public_equ`, page 266.

## required

|             |                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma required=symbol</code>                                                                                                                                                                                                                                                                                                                                                              |
| Parameters  | <i>symbol</i> Any statically linked function or variable.                                                                                                                                                                                                                                                                                                                                         |
| Description | <p>Use this pragma directive to ensure that a symbol which is needed by a second symbol is included in the linked output. The directive must be placed immediately before the second symbol.</p> <p>Use the directive if the requirement for a symbol is not otherwise visible in the application, for example if a variable is only referenced indirectly through the section it resides in.</p> |
| Example     | <pre>const char copyright[] = "Copyright by me";  #pragma required=copyright int main() {     /* Do something here. */ }</pre> <p>Even if the copyright string is not used by the application, it will still be included by the linker and available in the output.</p>                                                                                                                           |

## rtmodel

|             |                                                                                                                                                                                                                                                                                                                                          |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma rtmodel="key", "value"</code>                                                                                                                                                                                                                                                                                              |
| Parameters  | <p><i>"key"</i>                      A text string that specifies the runtime model attribute.</p> <p><i>"value"</i>                    A text string that specifies the value of the runtime model attribute. Using the special value <code>*</code> is equivalent to not defining the attribute at all.</p>                            |
| Description | <p>Use this pragma directive to add a runtime model attribute to a module, which can be used by the linker to check consistency between modules.</p> <p>This pragma directive is useful for enforcing consistency between modules. All modules that are linked together and define the same runtime attribute key must have the same</p> |

value for the corresponding key, or the special value \*. It can, however, be useful to state explicitly that the module can handle any runtime model.

A module can have several runtime model definitions.

**Note:** The predefined compiler runtime model attributes start with a double underscore. To avoid confusion, this style must not be used in the user-defined attributes.

Example

```
#pragma rtmodel="I2C", "ENABLED"
```

The linker will generate an error if a module that contains this definition is linked with a module that does not have the corresponding runtime model attributes defined.

See also

*Checking module consistency*, page 138.

## \_\_scanf\_args

Syntax

```
#pragma __scanf_args
```

Description

Use this pragma directive on a function with a scanf-style format string. For any call to that function, the compiler verifies that the argument to each conversion specifier (for example %d) is syntactically correct.

Example

```
#pragma __scanf_args
int scanf(char const *,...);

int GetNumber()
{
    int nr;
    scanf("%d", &nr); /* Compiler checks that
                       the argument is a
                       pointer to an integer */

    return nr;
}
```

## section

Syntax

```
#pragma section="NAME"
alias
#pragma segment="NAME"
```

|             |                                                                                                                                                                                                                                                                                                    |                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Parameters  | <i>NAME</i>                                                                                                                                                                                                                                                                                        | The name of the section. |
| Description | Use this pragma directive to define a section name that can be used by the section operators <code>__section_begin</code> , <code>__section_end</code> , and <code>__section_size</code> . All section declarations for a specific section must have the same memory type attribute and alignment. |                          |
|             | <b>Note:</b> To place variables or functions in a specific section, use the <code>#pragma location</code> directive or the <code>@</code> operator.                                                                                                                                                |                          |
| Example     | <code>#pragma section="MYSECTION"</code>                                                                                                                                                                                                                                                           |                          |
| See also    | <i>Dedicated section operators</i> , page 169. For more information about sections and segment parts, see the chapter <i>Linking your application</i> .                                                                                                                                            |                          |

## STDC CX\_LIMITED\_RANGE

|             |                                                                                                                                                                                              |                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Syntax      | <code>#pragma STDC CX_LIMITED_RANGE {ON OFF DEFAULT}</code>                                                                                                                                  |                                                    |
| Parameters  | ON                                                                                                                                                                                           | Normal complex mathematic formulas can be used.    |
|             | OFF                                                                                                                                                                                          | Normal complex mathematic formulas cannot be used. |
|             | DEFAULT                                                                                                                                                                                      | Sets the default behavior, that is OFF.            |
| Description | Use this pragma directive to specify that the compiler can use the normal complex mathematic formulas for <code>*</code> (multiplication), <code>/</code> (division), and <code>abs</code> . |                                                    |
|             | <b>Note:</b> This directive is required by Standard C. The directive is recognized but has no effect in the compiler.                                                                        |                                                    |

## STDC FENV\_ACCESS

|            |                                                        |                                                                                                                |
|------------|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Syntax     | <code>#pragma STDC FENV_ACCESS {ON OFF DEFAULT}</code> |                                                                                                                |
| Parameters | ON                                                     | Source code accesses the floating-point environment. Note that this argument is not supported by the compiler. |
|            | OFF                                                    | Source code does not access the floating-point environment.                                                    |

|             |                                                                                                               |                                         |
|-------------|---------------------------------------------------------------------------------------------------------------|-----------------------------------------|
|             | DEFAULT                                                                                                       | Sets the default behavior, that is OFF. |
| Description | Use this pragma directive to specify whether your source code accesses the floating-point environment or not. |                                         |
|             | <b>Note:</b> This directive is required by Standard C.                                                        |                                         |

## STDC FP\_CONTRACT

|             |                                                                                                                                                               |                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | #pragma STDC FP_CONTRACT {ON OFF DEFAULT}                                                                                                                     |                                                                                                                               |
| Parameters  | ON                                                                                                                                                            | The compiler is allowed to contract floating-point expressions.                                                               |
|             | OFF                                                                                                                                                           | The compiler is not allowed to contract floating-point expressions. Note that this argument is not supported by the compiler. |
|             | DEFAULT                                                                                                                                                       | Sets the default behavior, that is ON.                                                                                        |
| Description | Use this pragma directive to specify whether the compiler is allowed to contract floating-point expressions or not. This directive is required by Standard C. |                                                                                                                               |
| Example     | #pragma STDC FP_CONTRACT=ON                                                                                                                                   |                                                                                                                               |

## swi\_number

|             |                                                                                                                                                                                                                                                                              |                               |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Syntax      | #pragma swi_number= <i>number</i>                                                                                                                                                                                                                                            |                               |
| Parameters  | <i>number</i>                                                                                                                                                                                                                                                                | The software interrupt number |
| Description | Use this pragma directive together with the <code>__swi</code> extended keyword. It is used as an argument to the generated <code>SVC</code> assembler instruction, and is used for selecting one software interrupt function in a system containing several such functions. |                               |
| Example     | #pragma swi_number=17                                                                                                                                                                                                                                                        |                               |
| See also    | <i>Software interrupts</i> , page 70.                                                                                                                                                                                                                                        |                               |



## type\_attribute

|             |                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>#pragma type_attribute=type_attr[ type_attr...]</code>                                                                                                                                                                                                                                                                                                         |
| Parameters  | For information about type attributes that can be used with this pragma directive, see <i>Type attributes</i> , page 319.                                                                                                                                                                                                                                            |
| Description | Use this pragma directive to specify IAR-specific <i>type attributes</i> , which are not part of Standard C. Note however, that a given type attribute might not be applicable to all kind of objects.<br><br>This directive affects the declaration of the identifier, the next variable, or the next function that follows immediately after the pragma directive. |
| Example     | In this example, thumb-mode code is generated for the function <code>foo</code> :<br><br><pre>#pragma type_attribute=__thumb void foo(void) { }</pre> <p>This declaration, which uses extended keywords, is equivalent:</p> <pre>__thumb void foo(void) { }</pre>                                                                                                    |
| See also    | The chapter <i>Extended keywords</i> .                                                                                                                                                                                                                                                                                                                               |

## vectorize

|                    |                                                                                                                                                                                                                                                                                                                                                                          |              |                                                 |                    |                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------------------------------------|--------------------|--------------------------------------------------|
| Syntax             | <code>#pragma vectorize [= never]</code>                                                                                                                                                                                                                                                                                                                                 |              |                                                 |                    |                                                  |
| Parameters         | <table> <tr> <td>No parameter</td> <td>Enables generation of NEON vector instructions.</td> </tr> <tr> <td><code>never</code></td> <td>Disables generation of NEON vector instructions.</td> </tr> </table>                                                                                                                                                              | No parameter | Enables generation of NEON vector instructions. | <code>never</code> | Disables generation of NEON vector instructions. |
| No parameter       | Enables generation of NEON vector instructions.                                                                                                                                                                                                                                                                                                                          |              |                                                 |                    |                                                  |
| <code>never</code> | Disables generation of NEON vector instructions.                                                                                                                                                                                                                                                                                                                         |              |                                                 |                    |                                                  |
| Description        | Use this pragma directive to enable or disable generation of NEON vector instructions for the loop that follows immediately after the pragma directive. This pragma directive can only be placed immediately before a <code>for</code> , <code>do</code> , or <code>while</code> loop. If the optimization level is lower than High, the pragma directive has no effect. |              |                                                 |                    |                                                  |

Example

```
#pragma vectorize
for (i = 0; i < 1024; ++i)
{
    a[i] = b[i] * c[i];
}
```

## weak

Syntax `#pragma weak symbol1[=symbol2]`

Parameters

|                |                                               |
|----------------|-----------------------------------------------|
| <i>symbol1</i> | A function or variable with external linkage. |
| <i>symbol2</i> | A defined function or variable.               |

Description

This pragma directive can be used in one of two ways:

- To make the definition of a function or variable with external linkage a weak definition. The `__weak` attribute can also be used for this purpose.
- To create a weak alias for another function or variable. You can make more than one alias for the same function or variable.

Example

To make the definition of `foo` a weak definition, write:

```
#pragma weak foo
```

To make `NMI_Handler` a weak alias for `Default_Handler`, write:

```
#pragma weak NMI_Handler=Default_Handler
```

If `NMI_Handler` is not defined elsewhere in the program, all references to `NMI_Handler` will refer to `Default_Handler`.

See also `__weak`, page 331.

# Intrinsic functions

- Summary of intrinsic functions
- Descriptions of intrinsic functions

---

## Summary of intrinsic functions

To use intrinsic functions in an application, include the header file `intrinsics.h`.

To use Neon intrinsic functions in an application, include the header file `arm_neon.h`. For more information, see *Intrinsic functions for Neon instructions*, page 361.

Note that the intrinsic function names start with double underscores, for example:

```
__disable_interrupt
```

This table summarizes the intrinsic functions:

| Intrinsic function               | Description                                                                                                                                                                                           |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>__as_get_base</code>       | Creates a pointer of the same type as the parameter, representing the base of the area pointed to by the parameter. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .        |
| <code>__as_get_bounds</code>     | Creates a pointer of the same type as the parameter, representing the upper bound of the area pointed to by the parameter. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> . |
| <code>__as_make_bounds</code>    | Creates a pointer with bounds information. See the C-RUN documentation in the <i>C-SPY® Debugging Guide for ARM</i> .                                                                                 |
| <code>__CLREX</code>             | Inserts a CLREX instruction                                                                                                                                                                           |
| <code>__CLZ</code>               | Inserts a CLZ instruction                                                                                                                                                                             |
| <code>__disable_fiq</code>       | Disables fast interrupt requests (fiq)                                                                                                                                                                |
| <code>__disable_interrupt</code> | Disables interrupts                                                                                                                                                                                   |
| <code>__disable_irq</code>       | Disables interrupt requests (irq)                                                                                                                                                                     |
| <code>__DMB</code>               | Inserts a DMB instruction                                                                                                                                                                             |
| <code>__DSB</code>               | Inserts a DSB instruction                                                                                                                                                                             |
| <code>__enable_fiq</code>        | Enables fast interrupt requests (fiq)                                                                                                                                                                 |
| <code>__enable_interrupt</code>  | Enables interrupts                                                                                                                                                                                    |

Table 36: Intrinsic functions summary

| Intrinsic function                 | Description                                                                            |
|------------------------------------|----------------------------------------------------------------------------------------|
| <code>__enable_irq</code>          | Enables interrupt requests (irq)                                                       |
| <code>__get_BASEPRI</code>         | Returns the value of the Cortex-M3/Cortex-M4/Cortex-M7 <code>BASEPRI</code> register   |
| <code>__get_CONTROL</code>         | Returns the value of the Cortex-M <code>CONTROL</code> register                        |
| <code>__get_CPSR</code>            | Returns the value of the ARM <code>CPSR</code> (Current Program Status Register)       |
| <code>__get_FAULTMASK</code>       | Returns the value of the Cortex-M3/Cortex-M4/Cortex-M7 <code>FAULTMASK</code> register |
| <code>__get_FPSCR</code>           | Returns the value of <code>FPSCR</code>                                                |
| <code>__get_interrupt_state</code> | Returns the interrupt state                                                            |
| <code>__get_IPSR</code>            | Returns the value of the <code>IPSR</code> register                                    |
| <code>__get_LR</code>              | Returns the value of the link register                                                 |
| <code>__get_MSP</code>             | Returns the value of the <code>MSP</code> register                                     |
| <code>__get_PRIMASK</code>         | Returns the value of the Cortex-M <code>PRIMASK</code> register                        |
| <code>__get_PSP</code>             | Returns the value of the <code>PSP</code> register                                     |
| <code>__get_PSR</code>             | Returns the value of the <code>PSR</code> register                                     |
| <code>__get_SB</code>              | Returns the value of the static base register                                          |
| <code>__get_SP</code>              | Returns the value of the stack pointer register                                        |
| <code>__ISB</code>                 | Inserts an <code>ISB</code> instruction                                                |
| <code>__LDC</code>                 | Inserts the coprocessor load instruction <code>LDC</code>                              |
| <code>__LDCL</code>                | Inserts the coprocessor load instruction <code>LDCL</code>                             |
| <code>__LDC2</code>                | Inserts the coprocessor load instruction <code>LDC2</code>                             |
| <code>__LDC2L</code>               | Inserts the coprocessor load instruction <code>LDC2L</code>                            |
| <code>__LDC_noidx</code>           | Inserts the coprocessor load instruction <code>LDC</code>                              |
| <code>__LDCL_noidx</code>          | Inserts the coprocessor load instruction <code>LDCL</code>                             |
| <code>__LDC2_noidx</code>          | Inserts the coprocessor load instruction <code>LDC2</code>                             |
| <code>__LDC2L_noidx</code>         | Inserts the coprocessor load instruction <code>LDC2L</code>                            |
| <code>__LDREX</code>               | Inserts an <code>LDREX</code> instruction                                              |
| <code>__LDREXB</code>              | Inserts an <code>LDREXB</code> instruction                                             |
| <code>__LDREXD</code>              | Inserts an <code>LDREXD</code> instruction                                             |
| <code>__LDREXH</code>              | Inserts an <code>LDREXH</code> instruction                                             |
| <code>__MCR</code>                 | Inserts the coprocessor write instruction <code>MCR</code>                             |
| <code>__MCR2</code>                | Inserts the coprocessor write instruction <code>MCR2</code>                            |

Table 36: Intrinsic functions summary (Continued)

| <b>Intrinsic function</b>    | <b>Description</b>                                                                                    |
|------------------------------|-------------------------------------------------------------------------------------------------------|
| <code>__MRC</code>           | Inserts the coprocessor read instruction <code>MRC</code>                                             |
| <code>__MRC2</code>          | Inserts the coprocessor read instruction <code>MRC2</code>                                            |
| <code>__no_operation</code>  | Inserts a <code>NOP</code> instruction                                                                |
| <code>__PKHBT</code>         | Inserts a <code>PKHBT</code> instruction                                                              |
| <code>__PKHTB</code>         | Inserts a <code>PKHTB</code> instruction                                                              |
| <code>__PLD</code>           | Inserts the preload data instruction <code>PLD</code>                                                 |
| <code>__PLDW</code>          | Inserts the preload data instruction <code>PLDW</code>                                                |
| <code>__PLI</code>           | Inserts a <code>PLI</code> instruction                                                                |
| <code>__QADD</code>          | Inserts a <code>QADD</code> instruction                                                               |
| <code>__QADD8</code>         | Inserts a <code>QADD8</code> instruction                                                              |
| <code>__QADD16</code>        | Inserts a <code>QADD16</code> instruction                                                             |
| <code>__QASX</code>          | Inserts a <code>QASX</code> instruction                                                               |
| <code>__QCFlag</code>        | Returns the value of the cumulative saturation flag of the <code>FPSCR</code> register                |
| <code>__QDADD</code>         | Inserts a <code>QDADD</code> instruction                                                              |
| <code>__QDOUBLE</code>       | Inserts a <code>QDOUBLE</code> instruction                                                            |
| <code>__QDSUB</code>         | Inserts a <code>QDSUB</code> instruction                                                              |
| <code>__QFlag</code>         | Returns the <code>Q</code> flag that indicates if overflow/saturation has occurred                    |
| <code>__QSAX</code>          | Inserts a <code>QSAX</code> instruction                                                               |
| <code>__QSUB</code>          | Inserts a <code>QSUB</code> instruction                                                               |
| <code>__QSUB8</code>         | Inserts a <code>QSUB8</code> instruction                                                              |
| <code>__QSUB16</code>        | Inserts a <code>QSUB16</code> instruction                                                             |
| <code>__RBIT</code>          | Inserts an <code>RBIT</code> instruction                                                              |
| <code>__reset_Q_flag</code>  | Clears the <code>Q</code> flag that indicates if overflow/saturation has occurred                     |
| <code>__reset_QC_flag</code> | Clears the value of the cumulative saturation flag <code>QC</code> of the <code>FPSCR</code> register |
| <code>__REV</code>           | Inserts an <code>REV</code> instruction                                                               |
| <code>__REV16</code>         | Inserts an <code>REV16</code> instruction                                                             |
| <code>__REVSH</code>         | Inserts an <code>REVSH</code> instruction                                                             |
| <code>__SADD8</code>         | Inserts an <code>SADD8</code> instruction                                                             |
| <code>__SADD16</code>        | Inserts an <code>SADD16</code> instruction                                                            |

Table 36: Intrinsic functions summary (Continued)

| <b>Intrinsic function</b>          | <b>Description</b>                                                                  |
|------------------------------------|-------------------------------------------------------------------------------------|
| <code>__SASX</code>                | Inserts an <code>SASX</code> instruction                                            |
| <code>__SEL</code>                 | Inserts an <code>SEL</code> instruction                                             |
| <code>__set_BASEPRI</code>         | Sets the value of the Cortex-M3/Cortex-M4/Cortex-M7 <code>BASEPRI</code> register   |
| <code>__set_CONTROL</code>         | Sets the value of the Cortex-M <code>CONTROL</code> register                        |
| <code>__set_CPSR</code>            | Sets the value of the ARM <code>CPSR</code> (Current Program Status Register)       |
| <code>__set_FAULTMASK</code>       | Sets the value of the Cortex-M3/Cortex-M4/Cortex-M7 <code>FAULTMASK</code> register |
| <code>__set_FPSCR</code>           | Sets the value of the <code>FPSCR</code> register                                   |
| <code>__set_interrupt_state</code> | Restores the interrupt state                                                        |
| <code>__set_LR</code>              | Assigns a new address to the link register                                          |
| <code>__set_MSP</code>             | Sets the value of the <code>MSP</code> register                                     |
| <code>__set_PRIMASK</code>         | Sets the value of the Cortex-M <code>PRIMASK</code> register                        |
| <code>__set_PSP</code>             | Sets the value of the <code>PSP</code> register                                     |
| <code>__set_SB</code>              | Assigns a new address to the static base register                                   |
| <code>__set_SP</code>              | Assigns a new address to the stack pointer register                                 |
| <code>__SEV</code>                 | Inserts an <code>SEV</code> instruction                                             |
| <code>__SHADD8</code>              | Inserts an <code>SHADD8</code> instruction                                          |
| <code>__SHADD16</code>             | Inserts an <code>SHADD16</code> instruction                                         |
| <code>__SHASX</code>               | Inserts an <code>SHASX</code> instruction                                           |
| <code>__SHSAX</code>               | Inserts an <code>SHSAX</code> instruction                                           |
| <code>__SHSUB8</code>              | Inserts an <code>SHSUB8</code> instruction                                          |
| <code>__SHSUB16</code>             | Inserts an <code>SHSUB16</code> instruction                                         |
| <code>__SMLABB</code>              | Inserts an <code>SMLABB</code> instruction                                          |
| <code>__SMLABT</code>              | Inserts an <code>SMLABT</code> instruction                                          |
| <code>__SMLAD</code>               | Inserts an <code>SMLAD</code> instruction                                           |
| <code>__SMLADX</code>              | Inserts an <code>SMLADX</code> instruction                                          |
| <code>__SMLALBB</code>             | Inserts an <code>SMLALBB</code> instruction                                         |
| <code>__SMLALBT</code>             | Inserts an <code>SMLALBT</code> instruction                                         |
| <code>__SMLALD</code>              | Inserts an <code>SMLALD</code> instruction                                          |
| <code>__SMLALDX</code>             | Inserts an <code>SMLALDX</code> instruction                                         |
| <code>__SMLALTB</code>             | Inserts an <code>SMLALTB</code> instruction                                         |

Table 36: Intrinsic functions summary (Continued)

| Intrinsic function | Description                                   |
|--------------------|-----------------------------------------------|
| __SMLALTT          | Inserts an SMLALTT instruction                |
| __SMLATB           | Inserts an SMLATB instruction                 |
| __SMLATT           | Inserts an SMLATT instruction                 |
| __SMLAWB           | Inserts an SMLAWB instruction                 |
| __SMLAWT           | Inserts an SMLAWT instruction                 |
| __SMLSD            | Inserts an SMLSD instruction                  |
| __SMLSDX           | Inserts an SMLSDX instruction                 |
| __SMLSLD           | Inserts an SMLSLD instruction                 |
| __SMLSLDX          | Inserts an SMLSLDX instruction                |
| __SMMLA            | Inserts an SMMLA instruction                  |
| __SMMLAR           | Inserts an SMMLAR instruction                 |
| __SMMLS            | Inserts an SMMLS instruction                  |
| __SMMLSR           | Inserts an SMMLSR instruction                 |
| __SMMUL            | Inserts an SMMUL instruction                  |
| __SMMULR           | Inserts an SMMULR instruction                 |
| __SMUAD            | Inserts an SMUAD instruction                  |
| __SMUADX           | Inserts an SMUADX instruction                 |
| __SMUL             | Inserts a signed 16-bit multiplication        |
| __SMULBB           | Inserts an SMULBB instruction                 |
| __SMULBT           | Inserts an SMULBT instruction                 |
| __SMULTB           | Inserts an SMULTB instruction                 |
| __SMULTT           | Inserts an SMULTT instruction                 |
| __SMULWB           | Inserts an SMULWB instruction                 |
| __SMULWT           | Inserts an SMULWT instruction                 |
| __SMUSD            | Inserts an SMUSD instruction                  |
| __SMUSDX           | Inserts an SMUSDX instruction                 |
| __SSAT             | Inserts an SSAT instruction                   |
| __SSAT16           | Inserts an SSAT16 instruction                 |
| __SSAX             | Inserts an SSAX instruction                   |
| __SSUB8            | Inserts an SSUB8 instruction                  |
| __SSUB16           | Inserts an SSUB16 instruction                 |
| __STC              | Inserts the coprocessor store instruction STC |

Table 36: Intrinsic functions summary (Continued)

| <b>Intrinsic function</b>  | <b>Description</b>                                           |
|----------------------------|--------------------------------------------------------------|
| <code>__STCL</code>        | Inserts the coprocessor store instruction <code>STCL</code>  |
| <code>__STC2</code>        | Inserts the coprocessor store instruction <code>STC2</code>  |
| <code>__STC2L</code>       | Inserts the coprocessor store instruction <code>STC2L</code> |
| <code>__STC_noidx</code>   | Inserts the coprocessor store instruction <code>STC</code>   |
| <code>__STCL_noidx</code>  | Inserts the coprocessor store instruction <code>STCL</code>  |
| <code>__STC2_noidx</code>  | Inserts the coprocessor store instruction <code>STC2</code>  |
| <code>__STC2L_noidx</code> | Inserts the coprocessor store instruction <code>STC2L</code> |
| <code>__STREX</code>       | Inserts a <code>STREX</code> instruction                     |
| <code>__STREXB</code>      | Inserts a <code>STREXB</code> instruction                    |
| <code>__STREXD</code>      | Inserts a <code>STREXD</code> instruction                    |
| <code>__STREXH</code>      | Inserts a <code>STREXH</code> instruction                    |
| <code>__SWP</code>         | Inserts an <code>SWP</code> instruction                      |
| <code>__SWPB</code>        | Inserts an <code>SWPB</code> instruction                     |
| <code>__SXTAB</code>       | Inserts an <code>SXTAB</code> instruction                    |
| <code>__SXTAB16</code>     | Inserts an <code>SXTAB16</code> instruction                  |
| <code>__SXTAH</code>       | Inserts an <code>SXTAH</code> instruction                    |
| <code>__SXTB16</code>      | Inserts an <code>SXTB16</code> instruction                   |
| <code>__UADD8</code>       | Inserts a <code>UADD8</code> instruction                     |
| <code>__UADD16</code>      | Inserts a <code>UADD16</code> instruction                    |
| <code>__UASX</code>        | Inserts a <code>UASX</code> instruction                      |
| <code>__UHADD8</code>      | Inserts a <code>UHADD8</code> instruction                    |
| <code>__UHADD16</code>     | Inserts a <code>UHADD16</code> instruction                   |
| <code>__UHASX</code>       | Inserts a <code>UHASX</code> instruction                     |
| <code>__UHSAX</code>       | Inserts a <code>UHSAX</code> instruction                     |
| <code>__UHSUB8</code>      | Inserts a <code>UHSUB8</code> instruction                    |
| <code>__UHSUB16</code>     | Inserts a <code>UHSUB16</code> instruction                   |
| <code>__UMAAL</code>       | Inserts a <code>UMAAL</code> instruction                     |
| <code>__UQADD8</code>      | Inserts a <code>UQADD8</code> instruction                    |
| <code>__UQADD16</code>     | Inserts a <code>UQADD16</code> instruction                   |
| <code>__UQASX</code>       | Inserts a <code>UQASX</code> instruction                     |
| <code>__UQSAX</code>       | Inserts a <code>UQSAX</code> instruction                     |
| <code>__UQSUB8</code>      | Inserts a <code>UQSUB8</code> instruction                    |

Table 36: Intrinsic functions summary (Continued)



| Intrinsic function     | Description                                 |
|------------------------|---------------------------------------------|
| <code>__UQSUB16</code> | Inserts a <code>UQSUB16</code> instruction  |
| <code>__USAD8</code>   | Inserts a <code>USAD8</code> instruction    |
| <code>__USADA8</code>  | Inserts a <code>USADA8A8</code> instruction |
| <code>__USAT</code>    | Inserts a <code>USAT</code> instruction     |
| <code>__USAT16</code>  | Inserts a <code>USAT16</code> instruction   |
| <code>__USAX</code>    | Inserts a <code>USAX</code> instruction     |
| <code>__USUB8</code>   | Inserts a <code>USUB8</code> instruction    |
| <code>__USUB16</code>  | Inserts a <code>USUB16</code> instruction   |
| <code>__UXTAB</code>   | Inserts a <code>UXTAB</code> instruction    |
| <code>__UXTAB16</code> | Inserts a <code>UXTAB16</code> instruction  |
| <code>__UXTAH</code>   | Inserts a <code>UXTAH</code> instruction    |
| <code>__UXTB16</code>  | Inserts a <code>UXTB16</code> instruction   |
| <code>__WFE</code>     | Inserts a <code>WFE</code> instruction      |
| <code>__WFI</code>     | Inserts a <code>WFI</code> instruction      |
| <code>__YIELD</code>   | Inserts a <code>YIELD</code> instruction    |

Table 36: Intrinsic functions summary (Continued)

## INTRINSIC FUNCTIONS FOR NEON INSTRUCTIONS

The Neon co-processor implements the Advanced SIMD instruction set extension, as defined by the ARM architecture. To use Neon intrinsic functions in an application, include the header file `arm_neon.h`. The functions use vector types that are named according to this pattern:

```
<type><size>x<number_of_lanes>_t
```

where:

- *type* is `int`, `unsigned int`, `float`, or `poly`
- *size* is 8, 16, 32, or 64
- *number\_of\_lanes* is 1, 2, 4, 8, or 16.

The total bit width of a vector type is *size* times *number\_of\_lanes*, and should fit in a D register (64 bits) or a Q register (128 bits).

For example:

```
__intrinsic float32x2_t vsub_f32(float32x2_t, float32x2_t);
```

The intrinsic function `vsub_f32` inserts a `VSUB.F32` instruction that operates on two 64-bit vectors (D registers), each with two elements (lanes) of 32-bit floating-point type.

Some functions use an array of vector types. As an example, the definition of an array type with four elements of type `float32x2_t` is:

```
typedef struct
{
    float32x2_t val[4];
}
float32x2x4_t;
```

---

## Descriptions of intrinsic functions

This section gives reference information about each intrinsic function.

### **\_\_CLREX**

Syntax

```
void __CLREX(void);
```

Description

Inserts a `CLREX` instruction.

This intrinsic function requires architecture ARMv6K or ARMv7 for ARM mode, and AVRv7 for Thumb mode.

### **\_\_CLZ**

Syntax

```
unsigned char __CLZ(unsigned long);
```

Description

Inserts a `CLZ` instruction.

This intrinsic function requires an ARMv5 architecture or higher for ARM mode, and ARMv6T2 or higher for Thumb mode.

### **\_\_disable\_fiq**

Syntax

```
void __disable_fiq(void);
```

Description

Disables fast interrupt requests (fiq).

This intrinsic function can only be used in privileged mode and is not available for Cortex-M devices.

**\_\_disable\_interrupt**

|             |                                                                                                                                                                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __disable_interrupt(void);</code>                                                                                                                                                                                                                                                                   |
| Description | Disables interrupts. For Cortex-M devices, it raises the execution priority level to 0 by setting the priority mask bit, <code>PRIMASK</code> . For other devices, it disables interrupt requests (irq) and fast interrupt requests (fiq).<br><br>This intrinsic function can only be used in privileged mode. |

**\_\_disable\_irq**

|             |                                                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __disable_irq(void);</code>                                                                                                           |
| Description | Disables interrupt requests (irq).<br><br>This intrinsic function can only be used in privileged mode and is not available for Cortex-M devices. |

**\_\_DMB**

|             |                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __DMB(void);</code>                                                                                                       |
| Description | Inserts a <code>DMB</code> instruction. This intrinsic function requires an ARMv6M architecture, or an ARMv7 architecture or higher. |

**\_\_DSB**

|             |                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __DSB(void);</code>                                                                                                       |
| Description | Inserts a <code>DSB</code> instruction. This intrinsic function requires an ARMv6M architecture, or an ARMv7 architecture or higher. |

**\_\_enable\_fiq**

|             |                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __enable_fiq(void);</code>                                                                                                                    |
| Description | Enables fast interrupt requests (fiq).<br><br>This intrinsic function can only be used in privileged mode, and it is not available for Cortex-M devices. |

## **\_\_enable\_interrupt**

|             |                                                                                                                                                                                                                                                                                                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __enable_interrupt(void);</code>                                                                                                                                                                                                                                                                         |
| Description | Enables interrupts. For Cortex-M devices, it resets the execution priority level to default by clearing the priority mask bit, <code>PRIMASK</code> . For other devices, it enables interrupt requests (irq) and fast interrupt requests (fiq).<br><br>This intrinsic function can only be used in privileged mode. |

## **\_\_enable\_irq**

|             |                                                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __enable_irq(void);</code>                                                                                                               |
| Description | Enables interrupt requests (irq).<br><br>This intrinsic function can only be used in privileged mode, and it is not available for Cortex-M devices. |

## **\_\_get\_BASEPRI**

|             |                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>unsigned long __get_BASEPRI(void);</code>                                                                                                                                  |
| Description | Returns the value of the <code>BASEPRI</code> register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device. |

## **\_\_get\_CONTROL**

|             |                                                                                                                                                        |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>unsigned long __get_CONTROL(void);</code>                                                                                                        |
| Description | Returns the value of the <code>CONTROL</code> register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device. |

## **\_\_get\_CPSR**

|             |                                                                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>unsigned long __get_CPSR(void);</code>                                                                                                                                                                    |
| Description | Returns the value of the ARM <code>CPSR</code> (Current Program Status Register). This intrinsic function can only be used in privileged mode, is not available for Cortex-M devices, and it requires ARM mode. |

## \_\_get\_FAULTMASK

|             |                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>unsigned long __get_FAULTMASK(void);</code>                                                                                                                                  |
| Description | Returns the value of the <code>FAULTMASK</code> register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device. |

## \_\_get\_FPSCR

|             |                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>unsigned long __get_FPSCR(void);</code>                                                                                                                          |
| Description | Returns the value of <code>FPSCR</code> (floating-point status and control register).<br>This intrinsic function is only available for devices with a VFP coprocessor. |

## \_\_get\_interrupt\_state

|             |                                                                                                                                                                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>__istate_t __get_interrupt_state(void);</code>                                                                                                                                                                                                                                                                          |
| Description | Returns the global interrupt state. The return value can be used as an argument to the <code>__set_interrupt_state</code> intrinsic function, which will restore the interrupt state.<br>This intrinsic function can only be used in privileged mode, and cannot be used when using the <code>--aeabi</code> compiler option. |

|         |                                                                                                                                                                                               |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <pre>#include "intrinsics.h"  void CriticalFn() {     __istate_t s = __get_interrupt_state();     __disable_interrupt();      /* Do something here. */      __set_interrupt_state(s); }</pre> |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

The advantage of using this sequence of code compared to using `__disable_interrupt` and `__enable_interrupt` is that the code in this example will not enable any interrupts disabled before the call of `__get_interrupt_state`.

## **\_\_get\_IPSR**

Syntax `unsigned long __get_IPSR(void);`

Description Returns the value of the `IPSR` register (Interrupt Program Status Register). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.

## **\_\_get\_LR**

Syntax `unsigned long __get_LR(void);`

Description Returns the value of the link register (R14).

## **\_\_get\_MSP**

Syntax `unsigned long __get_MSP(void);`

Description Returns the value of the `MSP` register (Main Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.

## **\_\_get\_PRIMASK**

Syntax `unsigned long __get_PRIMASK(void);`

Description Returns the value of the `PRIMASK` register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device.

## **\_\_get\_PSP**

Syntax `unsigned long __get_PSP(void);`

Description Returns the value of the `PSP` register (Process Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.

**\_\_get\_PSR**

Syntax `unsigned long __get_PSR(void);`

Description Returns the value of the PSR register (combined Program Status Register). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices.

**\_\_get\_SB**

Syntax `unsigned long __get_SB(void);`

Description Returns the value of the static base register (R9).

**\_\_get\_SP**

Syntax `unsigned long __get_SP(void);`

Description Returns the value of the stack pointer register (R13).

**\_\_ISB**

Syntax `void __ISB(void);`

Description Inserts an ISB instruction. This intrinsic function requires an ARMv6M architecture, or an ARMv7 architecture or higher.

**\_\_LDC****\_\_LDCL****\_\_LDC2****\_\_LDC2L**

Syntax `void __LDCxxx(__ul coproc, __ul CRn, __ul const *src);`

## Parameters

|               |                                   |
|---------------|-----------------------------------|
| <i>coproc</i> | The coprocessor number 0 . . 15.  |
| <i>CRn</i>    | The coprocessor register to load. |
| <i>src</i>    | A pointer to the data to load.    |

## Description

Inserts the coprocessor load instruction `LDC`—or one of its variants—which means that a value will be loaded into a coprocessor register. The parameters *coproc* and *CRn* will be encoded in the instruction and must therefore be constants.

The intrinsic functions `__LDC` and `__LDCL` require architecture ARMv4 or higher for ARM mode, and ARMv6T2 or higher for Thumb mode.

The intrinsic functions `__LDC2` and `__LDC2L` require architecture ARMv5 or higher for ARM mode, and ARMv6T2 or higher for Thumb mode.

## `__LDC_noidx`

## `__LDCL_noidx`

## `__LDC2_noidx`

## `__LDC2L_noidx`

## Syntax

```
void __LDCxxx_noidx(__ul coproc, __ul CRn, __ul const *src, __ul option);
```

## Parameters

|               |                                          |
|---------------|------------------------------------------|
| <i>coproc</i> | The coprocessor number 0 . . 15.         |
| <i>CRn</i>    | The coprocessor register to load.        |
| <i>src</i>    | A pointer to the data to load.           |
| <i>option</i> | Additional coprocessor option 0 . . 255. |

## Description

Inserts the coprocessor load instruction `LDC`, or one of its variants. A value will be loaded into a coprocessor register. The parameters *coproc*, *CRn*, and *option* will be encoded in the instruction and must therefore be constants.

The intrinsic functions `__LDC_noidx` and `__LDCL_noidx` require architecture ARMv4 or higher for ARM mode, and ARMv6T2 or higher for Thumb mode.



The intrinsic functions `__LDC2_noidx` and `__LDC2L_noidx` require architecture ARMv5 or higher for ARM mode, and ARMv6T2 or higher for Thumb mode.

## `__LDREX`

## `__LDREXB`

## `__LDREXD`

## `__LDREXH`

### Syntax

```
unsigned long __LDREX(unsigned long *);
unsigned char __LDREXB(unsigned char *);
unsigned long long __LDREXD(unsigned long long *);
unsigned short __LDREXH(unsigned short *);
```

### Description

Inserts the specified instruction.

The `__LDREX` intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv6T2 or higher for Thumb mode.

The `__LDREXB` and the `__LDREXH` intrinsic functions require architecture ARMv6K or ARMv7 for ARM mode, and ARMv7 for Thumb mode.

The `__LDREX` intrinsic function requires architecture ARMv6K or ARMv7 for ARM mode, and ARMv7 but not ARMv7-M for Thumb mode.

## `__MCR`

## `__MCR2`

### Syntax

```
void __MCR(__ul coproc, __ul opcode_1, __ul src, __ul CRn, __ul CRm, __ul opcode_2);
void __MCR2(__ul coproc, __ul opcode_1, __ul src, __ul CRn, __ul CRm, __ul opcode_2);
```

### Parameters

|                       |                                      |
|-----------------------|--------------------------------------|
| <code>coproc</code>   | The coprocessor number 0..15.        |
| <code>opcode_1</code> | Coprocessor-specific operation code. |

|                 |                                                                          |
|-----------------|--------------------------------------------------------------------------|
| <i>src</i>      | The value to be written to the coprocessor.                              |
| <i>CRn</i>      | The coprocessor register to write to.                                    |
| <i>CRm</i>      | Additional coprocessor register; set to zero if not used.                |
| <i>opcode_2</i> | Additional coprocessor-specific operation code; set to zero if not used. |

**Description**

Inserts a coprocessor write instruction (*MCR* or *MCR2*). A value will be written to a coprocessor register. The parameters *coproc*, *opcode\_1*, *CRn*, *CRm*, and *opcode\_2* will be encoded in the instruction and must therefore be constants.

The intrinsic function `__MCR` requires either ARM mode, or an ARMv6T2 or higher for Thumb mode.

The intrinsic function `__MCR2` requires an ARMv5T architecture or higher for ARM mode, or ARMv6T2 or higher for Thumb mode.

## `__MRC`

## `__MRC2`

**Syntax**

```
unsigned long __MRC(__ul coproc, __ul opcode_1, __ul CRn, __ul
CRm, __ul opcode_2);
unsigned long __MRC2(__ul coproc, __ul opcode_1, __ul CRn, __ul
CRm, __ul opcode_2);
```

**Parameters**

|                 |                                                                          |
|-----------------|--------------------------------------------------------------------------|
| <i>coproc</i>   | The coprocessor number 0 . . 15.                                         |
| <i>opcode_1</i> | Coprocessor-specific operation code.                                     |
| <i>CRn</i>      | The coprocessor register to write to.                                    |
| <i>CRm</i>      | Additional coprocessor register; set to zero if not used.                |
| <i>opcode_2</i> | Additional coprocessor-specific operation code; set to zero if not used. |

**Description**

Inserts a coprocessor read instruction (*MRC* or *MRC2*). Returns the value of the specified coprocessor register. The parameters *coproc*, *opcode\_1*, *CRn*, *CRm*, and *opcode\_2* will be encoded in the instruction and must therefore be constants.

The intrinsic function `__MRC` requires either ARM mode, or an ARMv6T2 or higher for Thumb mode.

The intrinsic function `__MRC2` requires an ARMv5T architecture or higher for ARM mode, or ARMv6T2 or higher for Thumb mode.

## `__no_operation`

**Syntax** `void __no_operation(void);`

**Description** Inserts a NOP instruction.

## `__PKHBT`

**Syntax** `unsigned long __PKHBT(unsigned long x, unsigned long y, unsigned long count);`

**Parameters**

|              |                                           |
|--------------|-------------------------------------------|
| <i>x</i>     | First operand.                            |
| <i>y</i>     | Second operand, optionally shifted left.  |
| <i>count</i> | Shift count 0–31, where 0 means no shift. |

**Description** Inserts a `PKHBT` instruction, with an optionally shifted operand (LSL) for count in the range 1–31.

This intrinsic function requires an ARM v6 architecture or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## `__PKHTB`

**Syntax** `unsigned long __PKHTB(unsigned long x, unsigned long y, unsigned long count);`

**Parameters**

|              |                                                              |
|--------------|--------------------------------------------------------------|
| <i>x</i>     | First operand.                                               |
| <i>y</i>     | Second operand, optionally shifted right (arithmetic shift). |
| <i>count</i> | Shift count 0–32, where 0 means no shift.                    |

**Description** Inserts a `PKHTB` instruction, with an optionally shifted operand (ASR) for count in the range 1–32.

This intrinsic function requires an ARM v6 architecture or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARM v7E-M for Thumb mode.

## **\_\_PLD**

## **\_\_PLDW**

Syntax

```
void __PLD(void const *);
void __PLDW(void const *);
```

Description

Inserts a preload data instruction (PLD or PLDW).

The intrinsic function `__PLD` requires an ARMv7 architecture. `__PLDW` requires an ARMv7 architecture with MP extensions (for example Cortex-A5).

## **\_\_PLI**

Syntax

```
void __PLI(void const *);
```

Description

Inserts a PLI instruction.

This intrinsic function requires an ARM v7 architecture.

## **\_\_QADD**

## **\_\_QDADD**

## **\_\_QDSUB**

## **\_\_QSUB**

Syntax

```
signed long __Qxxx(signed long, signed long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv5E or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_QADD8****\_\_QADD16****\_\_QASX****\_\_QSAX****\_\_QSUB8****\_\_QSUB16**

Syntax `unsigned long __Qxxx(unsigned long, unsigned long);`

Description Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_QCFlag**

Syntax `unsigned long __QCFlag(void);`

Description Returns the value of the cumulative saturation flag `QC` of the `FPSCR` register (Floating-point Status and Control Register). This intrinsic function is only available for devices with Neon (Advanced SIMD).

**\_\_QDOUBLE**

Syntax `signed long __QDOUBLE(signed long);`

Description Inserts an instruction `QADD Rd, Rs, Rs` for a source register `Rs`, and a destination register `Rd`.

This intrinsic function requires architecture ARMv5E or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_QFlag**

Syntax `int __QFlag(void);`

Description Returns the `Q` flag that indicates if overflow/saturation has occurred.  
This intrinsic function requires architecture ARMv5E or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_RBIT**

Syntax `unsigned long __RBIT(unsigned long);`

Description Inserts an `RBIT` instruction, which reverses the bit order in a 32-bit register.  
This intrinsic function requires architecture ARMv6T2 or higher.

## **\_\_reset\_Q\_flag**

Syntax `void __reset_Q_flag(void);`

Description Clears the `Q` flag that indicates if overflow/saturation has occurred.  
This intrinsic function requires an ARM v5E architecture or higher for ARM mode, and ARM v7A, ARM v7R, or ARM v7E-M for Thumb mode.

## **\_\_reset\_QC\_flag**

Syntax `void __reset_QC_flag(void);`

Description Clears the value of the cumulative saturation flag `QC` of the `FPSCR` register (Floating-point Status and Control Register). This intrinsic function is only available for devices with Neon (Advanced SIMD).

**\_\_REV****\_\_REV16****\_\_REVSH**

Syntax

```
unsigned long __REV(unsigned long);
unsigned long __REV16(unsigned long);
signed long __REVSH(short);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher.

**\_\_SADD8****\_\_SADD16****\_\_SASX****\_\_SSAX****\_\_SSUB8****\_\_SSUB16**

Syntax

```
unsigned long __Sxxx(unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_SEL**

Syntax

```
unsigned long __SEL(unsigned long, unsigned long);
```

Description

Inserts an SEL instruction.

This intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_set\_BASEPRI**

Syntax

```
void __set_BASEPRI(unsigned long);
```

Description

Sets the value of the `BASEPRI` register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.

## **\_\_set\_CONTROL**

Syntax

```
void __set_CONTROL(unsigned long);
```

Description

Sets the value of the `CONTROL` register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device.

## **\_\_set\_CPSR**

Syntax

```
void __set_CPSR(unsigned long);
```

Description

Sets the value of the ARM `CPSR` (Current Program Status Register). Only the control field is changed (bits 0-7). This intrinsic function can only be used in privileged mode, is not available for Cortex-M devices, and it requires ARM mode.

## **\_\_set\_FAULTMASK**

Syntax

```
void __set_FAULTMASK(unsigned long);
```

Description

Sets the value of the `FAULTMASK` register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M3, Cortex-M4, or Cortex-M7 device.

## **\_\_set\_FPSCR**

Syntax

```
void __set_FPSCR(unsigned long);
```

Description

Sets the value of `FPSCR` (floating-point status and control register). This intrinsic function is only available for devices with a VFP coprocessor.



**\_\_set\_interrupt\_state**

|             |                                                                                                                                                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __set_interrupt_state(__istate_t);</code>                                                                                                                                                                    |
| Description | Restores the interrupt state to a value previously returned by the <code>__get_interrupt_state</code> function.<br>For information about the <code>__istate_t</code> type, see <i>__get_interrupt_state</i> , page 365. |

**\_\_set\_LR**

|             |                                                   |
|-------------|---------------------------------------------------|
| Syntax      | <code>void __set_LR(unsigned long);</code>        |
| Description | Assigns a new address to the link register (R14). |

**\_\_set\_MSP**

|             |                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __set_MSP(unsigned long);</code>                                                                                                                                    |
| Description | Sets the value of the <code>MSP</code> register (Main Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices. |

**\_\_set\_PRIMASK**

|             |                                                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __set_PRIMASK(unsigned long);</code>                                                                                                     |
| Description | Sets the value of the <code>PRIMASK</code> register. This intrinsic function can only be used in privileged mode and it requires a Cortex-M device. |

**\_\_set\_PSP**

|             |                                                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>void __set_PSP(unsigned long);</code>                                                                                                                                       |
| Description | Sets the value of the <code>PSP</code> register (Process Stack Pointer). This intrinsic function can only be used in privileged mode, and is only available for Cortex-M devices. |

### **\_\_set\_SB**

Syntax `void __set_SB(unsigned long);`

Description Assigns a new address to the static base register (R9).

### **\_\_set\_SP**

Syntax `void __set_SP(unsigned long);`

Description Assigns a new address to the stack pointer register (R13).

### **\_\_SEV**

Syntax `void __SEV(void);`

Description Inserts an `SEV` instruction.  
 This intrinsic function requires architecture ARMv7 for ARM mode, and ARMv6-M or ARMv7 for Thumb mode.

### **\_\_SHADD8**

### **\_\_SHADD16**

### **\_\_SHASX**

### **\_\_SHSAX**

### **\_\_SHSUB8**

### **\_\_SHSUB16**

Syntax `unsigned long __SHxxx(unsigned long, unsigned long);`

Description Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_SMLABB****\_\_SMLABT****\_\_SMLATB****\_\_SMLATT****\_\_SMLAWB****\_\_SMLAWT**

Syntax

```
unsigned long __SMLAxxx(unsigned long, unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_SMLAD****\_\_SMLADX****\_\_SMLSD****\_\_SMLSDX**

Syntax

```
unsigned long __SMLxxx(unsigned long, unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_SMLALBB**

## **\_\_SMLALBT**

## **\_\_SMLALTB**

## **\_\_SMLALTT**

Syntax

```
unsigned long long __SMLALxxx(unsigned long, unsigned long,
unsigned long long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_SMLALD**

## **\_\_SMLALDX**

## **\_\_SMLS LD**

## **\_\_SMLS LD X**

Syntax

```
unsigned long long __SMLxxx(unsigned long, unsigned long,
unsigned long long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_SMMLA****\_\_SMMLAR****\_\_SMMLS****\_\_SMMLSR**

Syntax `unsigned long __SMMLxxx(unsigned long, unsigned long, unsigned long);`

Description Inserts the specified instruction.  
 These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_SMMUL****\_\_SMMULR**

Syntax `unsigned long __SMMULxxx(unsigned long, unsigned long);`

Description Inserts the specified instruction.  
 These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_SMUAD****\_\_SMUADX****\_\_SMUSD****\_\_SMUSDX**

Syntax `unsigned long __SMUxxx(unsigned long, unsigned long);`

Description Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_SMUL**

Syntax

```
signed long __SMUL(signed short, signed short);
```

Description

Inserts a signed 16-bit multiplication.

This intrinsic function requires architecture ARMv5-E or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_SMULBB**

## **\_\_SMULBT**

## **\_\_SMULTB**

## **\_\_SMULTT**

## **\_\_SMULWB**

## **\_\_SMULWT**

Syntax

```
unsigned long __SMULxxx(unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_SSAT**

Syntax

```
unsigned long __SSAT(unsigned long, unsigned long);
```

Description

Inserts an *SSAT* instruction.

The compiler will incorporate a shift instruction into the operand when possible. For example, `__SSAT(x << 3, 11)` compiles to `SSAT Rd, #11, Rn, LSL #3`, where the

value of  $x$  has been placed in register  $R_n$  and the return value of `__SSAT` will be placed in register  $R_d$ .

This intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7-M for Thumb mode.

## `__SSAT16`

**Syntax** `unsigned long __SSAT16(unsigned long, unsigned long);`

**Description** Inserts an `SSAT16` instruction.

This intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARM v7E-M for Thumb mode.

## `__STC`

## `__STCL`

## `__STC2`

## `__STC2L`

**Syntax** `void __STCxxx(__ul coproc, __ul CRn, __ul const *dst);`

**Parameters**

|               |                                   |
|---------------|-----------------------------------|
| <i>coproc</i> | The coprocessor number 0..15.     |
| <i>CRn</i>    | The coprocessor register to load. |
| <i>dst</i>    | A pointer to the destination.     |

**Description**

Inserts the coprocessor store instruction `STC`—or one of its variants—which means that the value of the specified coprocessor register will be written to a memory location. The parameters *coproc* and *CRn* will be encoded in the instruction and must therefore be constants.

The intrinsic functions `__STC` and `__STCL` require architecture ARMv4 or higher for ARM mode, and ARM v6T2 or higher for Thumb mode.

The intrinsic functions `__STC2` and `__STC2L` require architecture ARMv5 or higher for ARM mode, and ARMv6-T2 or higher for Thumb mode.

## **\_\_STC\_noidx**

## **\_\_STCL\_noidx**

## **\_\_STC2\_noidx**

## **\_\_STC2L\_noidx**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| Syntax      | <code>void __STCxxx_noidx(__ul coproc, __ul CRn, __ul const *dst, __ul option);</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                       |
| Parameters  | <i>coproc</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | The coprocessor number 0..15.         |
|             | <i>CRn</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | The coprocessor register to load.     |
|             | <i>dst</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | A pointer to the destination.         |
|             | <i>option</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Additional coprocessor option 0..255. |
| Description | <p>Inserts the coprocessor store instruction <code>STC</code>—or one of its variants—which means that the value of the specified coprocessor register will be written to a memory location. The parameters <i>coproc</i>, <i>CRn</i>, and <i>option</i> will be encoded in the instruction and must therefore be constants.</p> <p>The intrinsic functions <code>__STC_noidx</code> and <code>__STCL_noidx</code> require architecture ARMv4 or higher for ARM mode, and ARMv6-T2 or higher for Thumb mode.</p> <p>The intrinsic functions <code>__STC2_noidx</code> and <code>__STC2L_noidx</code> require architecture ARMv5 or higher for ARM mode, and ARMv6-T2 or higher for Thumb mode.</p> |                                       |



**\_\_STREX****\_\_STREXB****\_\_STREXD****\_\_STREXH**

## Syntax

```
unsigned long __STREX(unsigned long, unsigned long *);
unsigned long __STREXB(unsigned char, unsigned char *);
unsigned long __STREXD(unsigned long long, unsigned long long*);
unsigned long __STREXH(unsigned short, unsigned short *);
```

## Description

Inserts the specified instruction.

The `__STREX` intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv6-T2 or higher for Thumb mode.

The `__STREXB` and the `__STREXH` intrinsic functions require architecture ARMv6K or ARMv7 for ARM mode, and ARMv7 for Thumb mode.

The `__STREXD` intrinsic function requires architecture ARMv6K or ARMv7 for ARM mode, and ARMv7 except for ARMv7-M for Thumb mode.

**\_\_SWP****\_\_SWPB**

## Syntax

```
unsigned long __SWP(unsigned long, unsigned long *);
char __SWPB(unsigned char, unsigned char *);
```

## Description

Inserts the specified instruction.

These intrinsic functions require ARM mode.

## **\_\_SXTAB**

## **\_\_SXTAB16**

## **\_\_SXTAH**

## **\_\_SXTB16**

Syntax `unsigned long __SXTxxx(unsigned long, unsigned long);`

Description Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_UADD8**

## **\_\_UADD16**

## **\_\_UASX**

## **\_\_USAX**

## **\_\_USUB8**

## **\_\_USUB16**

Syntax `unsigned long __Uxxx(unsigned long, unsigned long);`

Description Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_UHADD8****\_\_UHADDI16****\_\_UHASX****\_\_UHSAX****\_\_UHSUB8****\_\_UHSUBI16**

Syntax

```
unsigned long __UHxxx(unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

**\_\_UMAAL**

Syntax

```
unsigned long long __UMAAL(unsigned long, unsigned long,  
unsigned long, unsigned long);
```

Description

Inserts an `UMAAL` instruction.

This intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_UQADD8**

## **\_\_UQADDI16**

## **\_\_UQASX**

## **\_\_UQSAX**

## **\_\_UQSUB8**

## **\_\_UQSUBI16**

Syntax

```
unsigned long __UQxxx(unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_USAD8**

## **\_\_USADA8**

Syntax

```
unsigned long __USADxxx(unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## **\_\_USAT**

Syntax

```
unsigned long __USAT(unsigned long, unsigned long);
```

Description

Inserts a USAT instruction.

The compiler will incorporate a shift instruction into the operand when possible. For example, `__USAT(x << 3, 11)` compiles to `USAT Rd, #11, Rn, LSL #3`, where the

value of  $x$  has been placed in register  $R_n$  and the return value of `__USAT` will be placed in register  $R_d$ .

This intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7-M for Thumb mode.

## `__USAT16`

Syntax

```
unsigned long __USAT16(unsigned long, unsigned long);
```

Description

Inserts a `USAT16` instruction.

This intrinsic function requires architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## `__UXTAB`

## `__UXTAB16`

## `__UXTAH`

## `__UXTB16`

Syntax

```
unsigned long __UXTxxx(unsigned long, unsigned long);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv6 or higher for ARM mode, and ARMv7-A, ARMv7-R, or ARMv7E-M for Thumb mode.

## `__WFE`

## `__WFI`

## `__YIELD`

Syntax

```
void long __xxx(void);
```

Description

Inserts the specified instruction.

These intrinsic functions require architecture ARMv7 for ARM mode, and ARMv6-M, or ARMv7 for Thumb mode.

# The preprocessor

- Overview of the preprocessor
- Description of predefined preprocessor symbols
- Descriptions of miscellaneous preprocessor extensions

---

## Overview of the preprocessor

The preprocessor of the IAR C/C++ Compiler for ARM adheres to Standard C. The compiler also makes these preprocessor-related features available to you:

- Predefined preprocessor symbols  
These symbols allow you to inspect the compile-time environment, for example the time and date of compilation. For more information, see *Description of predefined preprocessor symbols*, page 392.
- User-defined preprocessor symbols defined using a compiler option  
In addition to defining your own preprocessor symbols using the `#define` directive, you can also use the option `-D`, see *-D*, page 242.
- Preprocessor extensions  
There are several preprocessor extensions, for example many `pragma` directives; for more information, see the chapter *Pragma directives*. For information about the corresponding `_Pragma` operator and the other extensions related to the preprocessor, see *Descriptions of miscellaneous preprocessor extensions*, page 397.
- Preprocessor output  
Use the option `--preprocess` to direct preprocessor output to a named file, see *--preprocess*, page 265.

To specify a path for an include file, use forward slashes:

```
#include "mydirectory/myfile"
```

In source code, use forward slashes:

```
file = fopen("mydirectory/myfile", "rt");
```

Note that backslashes can also be used. In this case, use one in include file paths and two in source code strings.

---

## Description of predefined preprocessor symbols

This section lists and describes the preprocessor symbols.

### **\_\_AAPCS\_\_**

|             |                                                                                                                                                                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | An integer that is set based on the <code>--aapcs</code> option. The symbol is set to 1 if the AAPCS base standard is the selected calling convention ( <code>--aapcs=std</code> ). The symbol is undefined for other calling conventions. |
| See also    | <code>--aapcs</code> , page 238.                                                                                                                                                                                                           |

### **\_\_AAPCS\_VFP\_\_**

|             |                                                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | An integer that is set based on the <code>--aapcs</code> option. The symbol is set to 1 if the VFP variant of AAPCS is the selected calling convention ( <code>--aapcs=vfp</code> ). The symbol is undefined for other calling conventions. |
| See also    | <code>--aapcs</code> , page 238.                                                                                                                                                                                                            |

### **\_\_ARM\_ADVANCED\_SIMD\_\_**

|             |                                                                                                                                                                                                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | An integer that is set based on the <code>--cpu</code> option. The symbol is set to 1 if the selected processor architecture has the Advanced SIMD architecture extension. The symbol is undefined for other cores. |
| See also    | <code>--cpu</code> , page 240.                                                                                                                                                                                      |

### **\_\_ARM\_MEDIA\_\_**

|             |                                                                                                                                                                                                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | An integer that is set based on the <code>--cpu</code> option. The symbol is set to 1 if the selected processor architecture has the ARMv6 SIMD extensions for multimedia. The symbol is undefined for other cores. |
| See also    | <code>--cpu</code> , page 240.                                                                                                                                                                                      |



**\_\_ARM\_PROFILE\_M\_\_**

**Description** An integer that is set based on the `--cpu` option. The symbol is set to 1 if the selected processor architecture is a profile M core. The symbol is undefined for other cores.

**See also** `--cpu`, page 240.

**\_\_ARMVFP\_\_**

**Description** An integer that reflects the `--fpu` option and is defined to `__ARMVFPV2__`, `__ARMVFPV3__`, or `__ARMVFPV4__`. These symbolic names can be used when testing the `__ARMVFP__` symbol. If VFP code generation is disabled (default), the symbol will be undefined.

**See also** `--fpu`, page 251.

**\_\_ARMVFP\_D16\_\_**

**Description** An integer that is set based on the `--fpu` option. The symbol is set to 1 if the selected FPU is a VFPv3 or VFPv4 unit with only 16 D registers. Otherwise, the symbol is undefined.

**See also** `--fpu`, page 251.

**\_\_ARMVFP\_FPI6\_\_**

**Description** An integer that is set based on the `--fpu` option. The symbol is set to 1 if the selected FPU only supports 16-bit floating-point numbers. Otherwise, the symbol is undefined.

**See also** `--fpu`, page 251.

**\_\_ARMVFP\_SP\_\_**

**Description** An integer that is set based on the `--fpu` option. The symbol is set to 1 if the selected FPU only supports 32-bit single-precision. Otherwise, the symbol is undefined.

**See also** `--fpu`, page 251.

**\_\_BASE\_FILE\_\_**

Description A string that identifies the name of the base source file (that is, not the header file), being compiled.

See also `__FILE__`, page 395, and `--no_path_in_file_macros`, page 259.

**\_\_BUILD\_NUMBER\_\_**

Description A unique integer that identifies the build number of the compiler currently in use.

**\_\_CORE\_\_**

Description An integer that identifies the chip core in use. The value reflects the setting of the `--cpu` option and is defined to `__ARM4TM__`, `__ARM5__`, `__ARM5E__`, `__ARM6__`, `__ARM6M__`, `__ARM6SM__`, `__ARM7M__`, `__ARM7EM__`, `__ARM7A__`, or `__ARM7R__`. These symbolic names can be used when testing the `__CORE__` symbol.

**\_\_cplusplus**

Description An integer which is defined when the compiler runs in any of the C++ modes, otherwise it is undefined. When defined, its value is 199711L. This symbol can be used with `#ifdef` to detect whether the compiler accepts C++ code. It is particularly useful when creating header files that are to be shared by C and C++ code.

This symbol is required by Standard C.

**\_\_CPU\_MODE\_\_**

Description An integer that reflects the selected CPU mode and is defined to 1 for Thumb and 2 for ARM.

**\_\_DATE\_\_**

Description A string that identifies the date of compilation, which is returned in the form "Mmm dd yyyy", for example "Oct 30 2010"

This symbol is required by Standard C.

**\_\_embedded\_cplusplus**

**Description** An integer which is defined to 1 when the compiler runs in Embedded C++ or Extended Embedded C++ mode, otherwise the symbol is undefined. This symbol can be used with `#ifdef` to detect whether the compiler accepts C++ code. It is particularly useful when creating header files that are to be shared by C and C++ code.

This symbol is required by Standard C.

**\_\_FILE\_\_**

**Description** A string that identifies the name of the file being compiled, which can be both the base source file and any included header file.

This symbol is required by Standard C.

**See also** `__BASE_FILE__`, page 394, and `--no_path_in_file_macros`, page 259.

**\_\_func\_\_**

**Description** A predefined string identifier that is initialized with the name of the function in which the symbol is used. This is useful for assertions and other trace utilities. The symbol requires that language extensions are enabled.

This symbol is required by Standard C.

**See also** `-e`, page 247 and `__PRETTY_FUNCTION__`, page 396.

**\_\_FUNCTION\_\_**

**Description** A predefined string identifier that is initialized with the name of the function in which the symbol is used. This is useful for assertions and other trace utilities. The symbol requires that language extensions are enabled.

**See also** `-e`, page 247 and `__PRETTY_FUNCTION__`, page 396.

**\_\_IAR\_SYSTEMS\_ICC\_\_**

**Description** An integer that identifies the IAR compiler platform. The current value is 8. Note that the number could be higher in a future version of the product. This symbol can be tested with `#ifdef` to detect whether the code was compiled by a compiler from IAR Systems.

**\_\_ICCARM\_\_**

Description An integer that is set to 1 when the code is compiled with the IAR C/C++ Compiler for ARM.

**\_\_LINE\_\_**

Description An integer that identifies the current source line number of the file being compiled, which can be both the base source file and any included header file.  
This symbol is required by Standard C.

**\_\_LITTLE\_ENDIAN\_\_**

Description An integer that reflects the setting of the `--endian` option and is defined to 1 when the byte order is little-endian. The symbol is defined to 0 when the byte order is big-endian.

**\_\_PRETTY\_FUNCTION\_\_**

Description A predefined string identifier that is initialized with the function name, including parameter types and return type, of the function in which the symbol is used, for example `"void func(char)"`. This symbol is useful for assertions and other trace utilities. The symbol requires that language extensions are enabled.

See also `-e`, page 247 and `__func__`, page 395.

**\_\_ROPI\_\_**

Description An integer that is defined when the `--ropi` compiler option is used.

See also `--ropi`, page 268.

**\_\_RWPI\_\_**

Description An integer that is defined when the `--rwp` compiler option is used.

See also `--rwp`, page 268.

**\_\_STDC\_\_**

Description

An integer that is set to 1, which means the compiler adheres to Standard C. This symbol can be tested with `#ifdef` to detect whether the compiler in use adheres to Standard C.\*

This symbol is required by Standard C.

**\_\_STDC\_VERSION\_\_**

Description

An integer that identifies the version of the C standard in use. The symbol expands to 199901L, unless the `--c89` compiler option is used in which case the symbol expands to 199409L. This symbol does not apply in EC++ mode.

This symbol is required by Standard C.

**\_\_TIME\_\_**

Description

A string that identifies the time of compilation in the form "hh:mm:ss".

This symbol is required by Standard C.

**\_\_VER\_\_**

Description

An integer that identifies the version number of the IAR compiler in use. For example, version 5.11.3 is returned as 5011003.

---

## Descriptions of miscellaneous preprocessor extensions

What do you want to read more about?

- NDEBUG
- #warning message

This section gives reference information about the preprocessor extensions that are available in addition to the predefined symbols, pragma directives, and Standard C directives.

**NDEBUG**

Description

This preprocessor symbol determines whether any assert macros you have written in your application shall be included or not in the built application.

If this symbol is not defined, all assert macros are evaluated. If the symbol is defined, all assert macros are excluded from the compilation. In other words, if the symbol is:

- **defined**, the assert code will *not* be included
- **not defined**, the assert code will be included

This means that if you write any assert code and build your application, you should define this symbol to exclude the assert code from the final application.

Note that the assert macro is defined in the `assert.h` standard include file.

In the IDE, the `NDEBUG` symbol is automatically defined if you build your application in the Release build configuration.

See also

*Assert*, page 132.

## #warning message

Syntax

`#warning message`

where *message* can be any string.

Description

Use this preprocessor directive to produce messages. Typically, this is useful for assertions and other trace utilities, similar to the way the Standard C `#error` directive is used. This directive is not recognized when the `--strict` compiler option is used.

# Library functions

- Library overview
- IAR DLIB Library

For detailed reference information about the library functions, see the online help system.

---

## Library overview

**The IAR DLIB Library** is a complete library, compliant with Standard C and C++. This library also supports floating-point numbers in IEEE 754 format and it can be configured to include different levels of support for locale, file descriptors, multibyte characters, etc.

For more information about customization, see the chapter *The DLIB runtime environment*.

For detailed information about the library functions, see the online documentation supplied with the product. There is also keyword reference information for the DLIB library functions. To obtain reference information for a function, select the function name in the editor window and press F1.

For more information about library functions, see the chapter *Implementation-defined behavior for Standard C* in this guide.

### HEADER FILES

Your application program gains access to library definitions through header files, which it incorporates using the `#include` directive. The definitions are divided into several different header files, each covering a particular functional area, letting you include just those that are required.

It is essential to include the appropriate header file before making any reference to its definitions. Failure to do so can cause the call to fail during execution, or generate error or warning messages at compile time or link time.

### LIBRARY OBJECT FILES

Most of the library definitions can be used without modification, that is, directly from the library object files that are supplied with the product. For information about how to set up a runtime library, see *Setting up the runtime environment*, page 104. The linker

will include only those routines that are required—directly or indirectly—by your application.

### ALTERNATIVE MORE ACCURATE LIBRARY FUNCTIONS

The default implementation of `cos`, `sin`, `tan`, and `pow` is designed to be fast and small. As an alternative, there are versions designed to provide better accuracy. They are named `__iar_xxx_accuratef` for float variants of the functions and `__iar_xxx_accuratel` for long double variants of the functions, and where `xxx` is `cos`, `sin`, etc.

To use any of these more accurate versions, use the `--redirect` linker option.

### REENTRANCY

A function that can be simultaneously invoked in the main application and in any number of interrupts is reentrant. A library function that uses statically allocated data is therefore not reentrant.

Most parts of the DLIB library are reentrant, but the following functions and parts are not reentrant because they need static data:

- Heap functions—`malloc`, `free`, `realloc`, `calloc`, and the C++ operators `new` and `delete`
- Locale functions—`localeconv`, `setlocale`
- Multibyte functions—`mbrlen`, `mbrtowc`, `mbsrtowc`, `mbtowc`, `wcrtomb`, `wcsrtomb`, `wctomb`
- Rand functions—`rand`, `srand`
- Time functions—`asctime`, `localtime`, `gmtime`, `mktime`
- The miscellaneous functions `atexit`, `strerror`, `strtok`
- Functions that use files or the heap in some way. This includes `scanf`, `sscanf`, `getchar`, and `putchar`. In addition, if you are using the options `--enable_multibyte` and `--dlib_config=Full`, the `printf` and `sprintf` functions (or any variants) can also use the heap.

Functions that can set `errno` are not reentrant, because an `errno` value resulting from one of these functions can be destroyed by a subsequent use of the function before it is read. This applies to math and string conversion functions, among others.

Remedies for this are:

- Do not use non-reentrant functions in interrupt service routines
- Guard calls to a non-reentrant function by a mutex, or a secure region, etc.



## THE LONGJMP FUNCTION



A `longjmp` is in effect a jump to a previously defined `setjmp`. Any variable length arrays or C++ objects residing on the stack during stack unwinding will not be destroyed. This can lead to resource leaks or incorrect application behavior.

---

## IAR DLIB Library

The IAR DLIB Library provides most of the important C and C++ library definitions that apply to embedded systems. These are of the following types:

- Adherence to a free-standing implementation of Standard C. The library supports most of the hosted functionality, but you must implement some of its base functionality. For additional information, see the chapter *Implementation-defined behavior for Standard C* in this guide.
- Standard C library definitions, for user programs.
- C++ library definitions, for user programs.
- `CSTARTUP`, the module containing the start-up code, see the chapter *The DLIB runtime environment* in this guide.
- Runtime support libraries; for example low-level floating-point routines.
- Intrinsic functions, allowing low-level use of ARM features. See the chapter *Intrinsic functions* for more information.

In addition, the IAR DLIB Library includes some added C functionality, see *Added C functionality*, page 405.

### C HEADER FILES

This section lists the header files specific to the DLIB library C definitions. Header files may additionally contain target-specific definitions; these are documented in the chapter *Using C*.

This table lists the C header files:

| Header file            | Usage                                             |
|------------------------|---------------------------------------------------|
| <code>assert.h</code>  | Enforcing assertions when functions execute       |
| <code>complex.h</code> | Computing common complex mathematical functions   |
| <code>ctype.h</code>   | Classifying characters                            |
| <code>errno.h</code>   | Testing error codes reported by library functions |
| <code>fenv.h</code>    | Floating-point exception flags                    |
| <code>float.h</code>   | Testing floating-point type properties            |

Table 37: Traditional Standard C header files—DLIB

| Header file             | Usage                                                              |
|-------------------------|--------------------------------------------------------------------|
| <code>inttypes.h</code> | Defining formatters for all types defined in <code>stdint.h</code> |
| <code>iso646.h</code>   | Using Amendment 1— <code>iso646.h</code> standard header           |
| <code>limits.h</code>   | Testing integer type properties                                    |
| <code>locale.h</code>   | Adapting to different cultural conventions                         |
| <code>math.h</code>     | Computing common mathematical functions                            |
| <code>setjmp.h</code>   | Executing non-local <code>goto</code> statements                   |
| <code>signal.h</code>   | Controlling various exceptional conditions                         |
| <code>stdarg.h</code>   | Accessing a varying number of arguments                            |
| <code>stdbool.h</code>  | Adds support for the <code>bool</code> data type in C.             |
| <code>stddef.h</code>   | Defining several useful types and macros                           |
| <code>stdint.h</code>   | Providing integer characteristics                                  |
| <code>stdio.h</code>    | Performing input and output                                        |
| <code>stdlib.h</code>   | Performing a variety of operations                                 |
| <code>string.h</code>   | Manipulating several kinds of strings                              |
| <code>tgmath.h</code>   | Type-generic mathematical functions                                |
| <code>time.h</code>     | Converting between various time and date formats                   |
| <code>uchar.h</code>    | Unicode functionality (IAR extension to Standard C)                |
| <code>wchar.h</code>    | Support for wide characters                                        |
| <code>wctype.h</code>   | Classifying wide characters                                        |

*Table 37: Traditional Standard C header files—DLIB (Continued)*

## C++ HEADER FILES

This section lists the C++ header files:

- The C++ library header files  
The header files that constitute the Standard C++ and the Embedded C++ library.
- The C++ standard template library (STL) header files  
The header files that constitute STL for the Standard C++ and the Extended Embedded C++ library.
- The C++ C header files  
The C++ header files that provide the resources from the C library.

## The C++ library header files

This table lists the header files that can be used in C++ as well as in Embedded C++:

| Header file               | Usage                                                                             |
|---------------------------|-----------------------------------------------------------------------------------|
| <code>complex</code>      | Defining a class that supports complex arithmetic                                 |
| <code>exception</code>    | Defining several functions that control exception handling; only usable in C++    |
| <code>fstream</code>      | Defining several I/O stream classes that manipulate external files                |
| <code>iomanip</code>      | Declaring several I/O stream manipulators that take an argument                   |
| <code>ios</code>          | Defining the class that serves as the base for many I/O streams classes           |
| <code>iosfwd</code>       | Declaring several I/O stream classes before they are necessarily defined          |
| <code>iostream</code>     | Declaring the I/O stream objects that manipulate the standard streams             |
| <code>istream</code>      | Defining the class that performs extractions                                      |
| <code>limits</code>       | Defining numerical values; only usable in C++                                     |
| <code>locale</code>       | Adapting to different cultural conventions; only usable in C++                    |
| <code>new</code>          | Declaring several functions that allocate and free storage                        |
| <code>ostream</code>      | Defining the class that performs insertions                                       |
| <code>sstream</code>      | Defining several I/O stream classes that manipulate string containers             |
| <code>stdexcept</code>    | Defining several classes useful for reporting exceptions; only usable in C++      |
| <code>streambuf</code>    | Defining classes that buffer I/O stream operations                                |
| <code>string</code>       | Defining a class that implements a string container                               |
| <code>stringstream</code> | Defining several I/O stream classes that manipulate in-memory character sequences |
| <code>typeinfo</code>     | Defining type information support; only usable in C++                             |

Table 38: C++ header files

## The C++ standard template library (STL) header files

The following table lists the standard template library (STL) header files that can be used in C++ as well as in Extended Embedded C++:

| Header file             | Description                                                                 |
|-------------------------|-----------------------------------------------------------------------------|
| <code>algorithm</code>  | Defines several common operations on sequences                              |
| <code>bitset</code>     | Defining a container with fixed-sized sequences of bits; only usable in C++ |
| <code>deque</code>      | A deque sequence container                                                  |
| <code>functional</code> | Defines several function objects                                            |

Table 39: Standard template library header files

| Header file           | Description                                                 |
|-----------------------|-------------------------------------------------------------|
| <code>hash_map</code> | A map associative container, based on a hash algorithm      |
| <code>hash_set</code> | A set associative container, based on a hash algorithm      |
| <code>iterator</code> | Defines common iterators, and operations on iterators       |
| <code>list</code>     | A doubly-linked list sequence container                     |
| <code>map</code>      | A map associative container                                 |
| <code>memory</code>   | Defines facilities for managing memory                      |
| <code>numeric</code>  | Performs generalized numeric operations on sequences        |
| <code>queue</code>    | A queue sequence container                                  |
| <code>set</code>      | A set associative container                                 |
| <code>slist</code>    | A singly-linked list sequence container                     |
| <code>stack</code>    | A stack sequence container                                  |
| <code>utility</code>  | Defines several utility components                          |
| <code>valarray</code> | Defining varying length array container; only usable in C++ |
| <code>vector</code>   | A vector sequence container                                 |

Table 39: Standard template library header files (Continued)

## Using Standard C libraries in C++

The C++ library works in conjunction with some of the header files from the Standard C library, sometimes with small alterations. The header files come in two forms—new and traditional—for example, `cassert` and `assert.h`.

This table shows the new header files:

| Header file            | Usage                                                              |
|------------------------|--------------------------------------------------------------------|
| <code>cassert</code>   | Enforcing assertions when functions execute                        |
| <code>ccomplex</code>  | Computing common complex mathematical functions                    |
| <code>cctype</code>    | Classifying characters                                             |
| <code>cerrno</code>    | Testing error codes reported by library functions                  |
| <code>cfenv</code>     | Floating-point exception flags                                     |
| <code>cfloat</code>    | Testing floating-point type properties                             |
| <code>cinttypes</code> | Defining formatters for all types defined in <code>stdint.h</code> |
| <code>ciso646</code>   | Using Amendment 1— <code>iso646.h</code> standard header           |
| <code>climits</code>   | Testing integer type properties                                    |
| <code>locale</code>    | Adapting to different cultural conventions                         |

Table 40: New Standard C header files—DLIB

| Header file           | Usage                                                  |
|-----------------------|--------------------------------------------------------|
| <code>cmath</code>    | Computing common mathematical functions                |
| <code>csetjmp</code>  | Executing non-local goto statements                    |
| <code>csignal</code>  | Controlling various exceptional conditions             |
| <code>cstdarg</code>  | Accessing a varying number of arguments                |
| <code>cstdbool</code> | Adds support for the <code>bool</code> data type in C. |
| <code>cstddef</code>  | Defining several useful types and macros               |
| <code>cstdint</code>  | Providing integer characteristics                      |
| <code>cstdio</code>   | Performing input and output                            |
| <code>stdlib</code>   | Performing a variety of operations                     |
| <code>cstring</code>  | Manipulating several kinds of strings                  |
| <code>tgmath</code>   | Type-generic mathematical functions                    |
| <code>ctime</code>    | Converting between various time and date formats       |
| <code>wchar</code>    | Support for wide characters                            |
| <code>wctype</code>   | Classifying wide characters                            |

Table 40: New Standard C header files—DLIB (Continued)

## LIBRARY FUNCTIONS AS INTRINSIC FUNCTIONS

Certain C library functions will under some circumstances be handled as intrinsic functions and will generate inline code instead of an ordinary function call, for example `memcpy`, `memset`, and `strcat`.

## ADDED C FUNCTIONALITY

The IAR DLIB Library includes some added C functionality.

The following include files provide these features:

- `fenv.h`
- `iar_dlmalloc.h`
- `stdio.h`
- `stdlib.h`
- `string.h`
- `time.h`

### **fenv.h**

In `fenv.h`, trap handling support for floating-point numbers is defined with the functions `fegetrapenable` and `fegettrapdisable`.

## iar\_dmalloc.h

The `iar_dmalloc.h` header file contains support for the advanced (`dlmalloc`) heap handler. For more information, see *Heap considerations*, page 189.

## stdio.h

These functions provide additional I/O functionality:

|                            |                                                                                     |
|----------------------------|-------------------------------------------------------------------------------------|
| <code>fdopen</code>        | Opens a file based on a low-level file descriptor.                                  |
| <code>fileno</code>        | Gets the low-level file descriptor from the file descriptor ( <code>FILE*</code> ). |
| <code>__gets</code>        | Corresponds to <code>fgets</code> on <code>stdin</code> .                           |
| <code>getw</code>          | Gets a <code>wchar_t</code> character from <code>stdin</code> .                     |
| <code>putw</code>          | Puts a <code>wchar_t</code> character to <code>stdout</code> .                      |
| <code>__ungetchar</code>   | Corresponds to <code>ungetc</code> on <code>stdout</code> .                         |
| <code>__write_array</code> | Corresponds to <code>fwrite</code> on <code>stdout</code> .                         |

## string.h

These are the additional functions defined in `string.h`:

|                          |                                                |
|--------------------------|------------------------------------------------|
| <code>strdup</code>      | Duplicates a string on the heap.               |
| <code>strcasecmp</code>  | Compares strings case-insensitive.             |
| <code>strncasecmp</code> | Compares strings case-insensitive and bounded. |
| <code>strlen</code>      | Bounded string length.                         |

## time.h

There are two interfaces for using `time_t` and the associated functions `time`, `ctime`, `difftime`, `gmtime`, `localtime`, and `mktime`:

- The 32-bit interface supports years from 1900 up to 2035 and uses a 32-bit integer for `time_t`. The type and function have names like `__time32_t`, `__time32`, etc. This variant is mainly available for backwards compatibility.
- The 64-bit interface supports years from -9999 up to 9999 and uses a signed `long long` for `time_t`. The type and function have names like `__time64_t`, `__time64`, etc.

In both interfaces, `time_t` starts at the year 1970.

The interfaces are defined in the system header file `time.h`.

An application can use either interface, and even mix them by explicitly using the 32- or 64-bit variants. By default, the library and the header redirect `time_t`, `time` etc. to the 32-bit variants. However, to explicitly redirect them to their 64-bit variants, define `_DLIB_TIME_USES_64` in front of the inclusion of `time.h` or `ctime`.

See also, *Time*, page 130.

`clock_t` is represented by a 32-bit integer type.

## SYMBOLS USED INTERNALLY BY THE LIBRARY

The following symbols are used by the library, which means that they are visible in library source files, etc:

`__assignment_by_bitwise_copy_allowed`

This symbol determines properties for class objects.

`__code`, `__data`

These symbols are used as memory attributes internally by the compiler, and they might have to be used as arguments in certain templates.

`__constrange()`

Determines the allowed range for a parameter to an intrinsic function and that the parameter must be of type `const`.

`__construction_by_bitwise_copy_allowed`

This symbol determines properties for class objects.

`__has_constructor`, `__has_destructor`

These symbols determine properties for class objects and they function like the `sizeof` operator. The symbols are true when a class, base class, or member (recursively) has a user-defined constructor or destructor, respectively.

`__memory_of`

Determines the class memory. A class memory determines which memory a class object can reside in. This symbol can only occur in class definitions as a class memory.

**Note:** The symbols are reserved and should only be used by the library.

Use the compiler option `--predef_macros` to determine the value for any predefined symbols.





# The linker configuration file

- Overview
- Defining memories and regions
- Regions
- Section handling
- Section selection
- Using symbols, expressions, and numbers
- Structural configuration

Before you read this chapter you must be familiar with the concept of *sections*, see *Modules and sections*, page 76.

---

## Overview

To link and locate an application in memory according to your requirements, ILINK needs information about how to handle sections and how to place them into the available memory regions. In other words, ILINK needs a *configuration*, passed to it by means of the *linker configuration file*.

This file consists of a sequence of directives and typically, provides facilities for:

- Defining available addressable memories
  - giving the linker information about the maximum size of possible addresses and defining the available physical memory, as well as dealing with memories that can be addressed in different ways.
- Defining the regions of the available memories that are populated with ROM or RAM
  - giving the start and end address for each region.
- Section groups

dealing with how to group sections into blocks and overlays depending on the section requirements.

- Defining how to handle initialization of the application  
giving information about which sections that are to be initialized, and how that initialization should be made.
- Memory allocation  
defining where—in what memory region—each set of sections should be placed.
- Using symbols, expressions, and numbers  
expressing addresses and sizes, etc, in the other configuration directives. The symbols can also be used in the application itself.
- Structural configuration  
meaning that you can include or exclude directives depending on a condition, and to split the configuration file into several different files.

Comments can be written either as C comments (`/* . . . */`) or as C++ comments (`// . . .`).

---

## Defining memories and regions

ILINK needs information about the available memory spaces, or more specifically it needs information about:

- The maximum size of possible addressable memories  
The `define memory` directive defines a *memory space* with a given size, which is the maximum possible amount of addressable memory, not necessarily physically available. See *Define memory directive*, page 410.
- Available physical memory  
The `define region` directive defines a region in the available memories in which specific sections of application code and sections of application data can be placed. See *Define region directive*, page 411.  
A region consists of one or several memory ranges. A range is a continuous sequence of bytes in a memory and several ranges can be expressed by using region expressions. See *Region expression*, page 413.

### Define memory directive

Syntax

```
define memory [ name ] with size = size_expr [ ,unit-size ];
```

where *unit-size* is one of:

```
unitbitsize = bitsize_expr
unitbytesize = bytesize_expr
```

and where *expr* is an expression, see *Expressions*, page 429.

#### Parameters

|                      |                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------|
| <i>size_expr</i>     | Specifies how many <i>units</i> the memory space contains; always counted from address zero. |
| <i>bitsize_expr</i>  | Specifies how many bits each unit contains.                                                  |
| <i>bytesize_expr</i> | Specifies how many bytes each unit contains. Each byte contains 8 bits.                      |

#### Description

The `define memory` directive defines a *memory space* with a given size, which is the maximum possible amount of addressable memory, not necessarily physically available. This sets the limits for the possible addresses to be used in the linker configuration file. For many microcontrollers, one memory space is sufficient. However, some microcontrollers require two or more. For example, a Harvard architecture usually requires two different memory spaces, one for code and one for data. If only one memory is defined, the memory name is optional. If no *unit-size* is given, the unit contains 8 bits.

#### Example

```
/* Declare the memory space Mem of four Gigabytes */
define memory Mem with size = 4G;
```

## Define region directive

#### Syntax

```
define region name = region-expr;
```

where *region-expr* is a region expression, see also *Regions*, page 412.

#### Parameters

|             |                         |
|-------------|-------------------------|
| <i>name</i> | The name of the region. |
|-------------|-------------------------|

#### Description

The `define region` directive defines a region in which specific sections of code and sections of data can be placed. A region consists of one or several memory ranges, where each memory range consists of a continuous sequence of bytes in a specific memory. Several ranges can be combined by using region expressions. Note that those ranges do not need to be consecutive or even in the same memory.

#### Example

```
/* Define the 0x10000-byte code region ROM located at address
   0x10000 in memory Mem */
define region ROM = Mem:[from 0x10000 size 0x10000];
```

## Regions

A *region* is a set of non-overlapping memory ranges. A *region expression* is built up out of *region literals* and set operations (union, intersection, and difference) on regions.

### Region literal

#### Syntax

```
[ memory-name: ] [ from expr { to expr | size expr }
  [ repeat expr [ displacement expr ] ]
```

where *expr* is an expression, see *Expressions*, page 429.

#### Parameters

|                                 |                                                                                                                                                 |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>memory-name</i>              | The name of the memory space in which the region literal will be located. If there is only one memory, the name is optional.                    |
| <i>from</i> <i>expr</i>         | <i>expr</i> is the start address of the memory range (inclusive).                                                                               |
| <i>to</i> <i>expr</i>           | <i>expr</i> is the end address of the memory range (inclusive).                                                                                 |
| <i>size</i> <i>expr</i>         | <i>expr</i> is the size of the memory range.                                                                                                    |
| <i>repeat</i> <i>expr</i>       | <i>expr</i> defines several ranges in the same memory for the region literal.                                                                   |
| <i>displacement</i> <i>expr</i> | <i>expr</i> is the displacement from the previous range start in the repeat sequence. Default displacement is the same value as the range size. |

#### Description

A region literal consists of one memory range. When you define a range, the memory it resides in, a start address, and a size must be specified. The range size can be stated explicitly by specifying a size, or implicitly by specifying the final address of the range. The final address is included in the range and a zero-sized range will only contain an address. A range can span over the address zero and such a range can even be expressed by unsigned values, because it is known where the memory wraps.

The `repeat` parameter will create a region literal that contains several ranges, one for each repeat. This is useful for *banked* or *far* regions.

**Example**

```

/* The 5-byte size range spans over the address zero */
Mem:[from -2 to 2]

/* The 512-byte size range spans over zero, in a 64-Kbyte memory
*/
Mem:[from 0xFF00 to 0xFF]

/* Defining several ranges in the same memory, a repeating
literal */
Mem:[from 0 size 0x100 repeat 3 displacement 0x1000]

/* Resulting in a region containing:
Mem:[from 0 size 0x100]
Mem:[from 0x1000 size 0x100]
Mem:[from 0x2000 size 0x100]
*/

```

**See also**

*Define region directive*, page 411, and *Region expression*, page 413.

**Region expression****Syntax**

```

region-operand
| region-expr | region-operand
| region-expr - region-operand
| region-expr & region-operand

```

where *region-operand* is one of:

```

( region-expr )
region-name
region-literal
empty-region

```

where *region-name* is a region, see *Define region directive*, page 411

where *region-literal* is a region literal, see *Region literal*, page 412

and where *empty-region* is an empty region, see *Empty region*, page 414.

**Description**

Normally, a region consists of one memory range, which means a *region literal* is sufficient to express it. When a region contains several ranges, possibly in different memories, it is instead necessary to use a *region expression* to express it. Region expressions are actually set expressions on sets of memory ranges.

To create region expressions, three operators are available: union (`|`), intersection (`&`), and difference (`-`). These operators work as in *set theory*. For example, if you have the sets A and B, then the result of the operators would be:

- A | B: all elements in either set A or set B
- A & B: all elements in both set A and B
- A - B: all elements in set A but not in B.

**Example**

```

/* Resulting in a range starting at 1000 and ending at 2FFF, in
   memory Mem */
Mem:[from 0x1000 to 0x1FFF] | Mem:[from 0x1500 to 0x2FFF]

/* Resulting in a range starting at 1500 and ending at 1FFF, in
   memory Mem */
Mem:[from 0x1000 to 0x1FFF] & Mem:[from 0x1500 to 0x2FFF]

/* Resulting in a range starting at 1000 and ending at 14FF, in
   memory Mem */
Mem:[from 0x1000 to 0x1FFF] - Mem:[from 0x1500 to 0x2FFF]

/* Resulting in two ranges. The first starting at 1000 and ending
   at 1FFF, the second starting at 2501 and ending at 2FFF.
   Both located in memory Mem */
Mem:[from 0x1000 to 0x2FFF] - Mem:[from 0x2000 to 0x24FF]

```

**Empty region****Syntax**

```
[ ]
```

**Description**

The empty region does not contain any memory ranges. If the empty region is used in a placement directive that actually is used for placing one or more sections, ILINK will issue an error.

**Example**

```

define region Code = Mem:[from 0 size 0x10000];
if (Banked) {
    define region Bank = Mem:[from 0x8000 size 0x1000];
} else {
    define region Bank = [];
}
define region NonBanked = Code - Bank;

/* Depending on the Banked symbol, the NonBanked region is either
   one range with 0x10000 bytes, or two ranges with 0x8000 and
   0x7000 bytes, respectively. */

```

**See also**

*Region expression*, page 413.

## Section handling

Section handling describes how ILINK should handle the sections of the execution image, which means:

- Placing sections in regions
 

The `place at` and `place into` directives place sets of sections with similar attributes into previously defined regions. See *Place at directive*, page 422 and *Place in directive*, page 423.
- Making sets of sections with special requirements
 

The `block` directive makes it possible to create empty sections with specific sizes and alignments, sequentially sorted sections of different types, etc.

The `overlay` directive makes it possible to create an area of memory that can contain several overlay images. See *Define block directive*, page 415, and *Define overlay directive*, page 417.
- Initializing the application
 

The directives `initialize` and `do not initialize` control how the application should be started. With these directives, the application can initialize global symbols at startup, and copy pieces of code. The initializers can be stored in several ways, for example they can be compressed. See *Initialize directive*, page 418 and *Do not initialize directive*, page 420.
- Keeping removed sections
 

The `keep` directive retains sections even though they are not referred to by the rest of the application, which means it is equivalent to the *root* concept in the assembler and compiler. See *Keep directive*, page 421.

### Define block directive

Syntax

```
define [movable] block name
  [ with param, param... ]
{
  extended-selectors
}
[except
{
  section_selectors
}];
```

where *param* can be one of:

```

size = expr
maximum size = expr
alignment = expr
fixed order
static base [basename]

```

and where the rest of the directive selects sections to include in the block, see *Section selection*, page 423.

### Parameters

|                                  |                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>name</i>                      | The name of the block to be defined.                                                                                                                                                                                                                                                                                                                          |
| <i>size</i>                      | Customizes the size of the block. By default, the size of a block is the sum of its parts dependent of its contents.                                                                                                                                                                                                                                          |
| maximum size                     | Specifies an upper limit for the size of the block. An error is generated if the sections in the block do not fit.                                                                                                                                                                                                                                            |
| alignment                        | Specifies a minimum alignment for the block. If any section in the block has a higher alignment than the minimum alignment, the block will have that alignment.                                                                                                                                                                                               |
| fixed order                      | Places sections in fixed order; if not specified, the order of the sections will be arbitrary.                                                                                                                                                                                                                                                                |
| static base<br><i>[basename]</i> | Specifies that the static base with the name <i>basename</i> will be placed at the start of the block or in the middle of the block, as appropriate for the particular static base. The startup code must ensure that the register that holds the static base is initialized to the correct value. If there is only one static base, the name can be omitted. |

### Description

The `block` directive defines a contiguous area of memory that contains a possibly empty set of sections or other blocks. Blocks with no content are useful for allocating space for stacks or heaps. Blocks with content are usually used to group together sections that must to be consecutive.

You can access the start, end, and size of a block from an application by using the `__section_begin`, `__section_end`, or `__section_size` operators. If there is no block with the specified name, but there are sections with that name, a block will be created by the linker, containing all such sections.

movable blocks are for use with read-only and read-write position independence. Making blocks movable enables the linker to validate the application's use of addresses. Movable blocks are located in exactly the same way as other blocks, but the linker will check that the appropriate relocations are used when referring to symbols in movable blocks.



**Example**

```
/* Create a 0x1000-byte block for the heap */
define block HEAP with size = 0x1000, alignment = 8 { };
```

**See also** *Interaction between the tools and your application*, page 190. See *Define overlay directive*, page 417 for an Accessing example.

## Define overlay directive

**Syntax**

```
define overlay name [ with param, param... ]
{
    extended-selectors;
}
[except
{
    section_selectors
}];
```

For information about extended selectors and except clauses, see *Section selection*, page 423.

### Parameters

|                     |                                                                                                                                                                       |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>name</i>         | The name of the overlay.                                                                                                                                              |
| <i>size</i>         | Customizes the size of the overlay. By default, the size of a overlay is the sum of its parts dependent of its contents.                                              |
| <i>maximum size</i> | Specifies an upper limit for the size of the overlay. An error is generated if the sections in the overlay do not fit.                                                |
| <i>alignment</i>    | Specifies a minimum alignment for the overlay. If any section in the overlay has a higher alignment than the minimum alignment, the overlay will have that alignment. |
| <i>fixed order</i>  | Places sections in fixed order; if not specified, the order of the sections will be arbitrary.                                                                        |

### Description

The *overlay* directive defines a named set of sections. In contrast to the *block* directive, the *overlay* directive can define the same name several times. Each definition will then be grouped in memory at the same place as all other definitions of the same name. This creates an *overlaid* memory area, which can be useful for an application that has several independent sub-applications.

Place each sub-application image in ROM and reserve a RAM overlay area that can hold all sub-applications. To execute a sub-application, first copy it from ROM to the RAM overlay. Note that ILINK does not help you with managing interdependent overlay

definitions, apart from generating a diagnostic message for any reference from one overlay to another overlay.

The size of an overlay will be the same size as the largest definition of that overlay name and the alignment requirements will be the same as for the definition with the highest alignment requirements.

**Note:** Sections that were overlaid must be split into a RAM and a ROM part and you must take care of all the copying needed.

See also

*Manual initialization*, page 96.

## Initialize directive

### Syntax

```
initialize { by copy | manually }
  [ with packing = algorithm ]
{
  section-selectors
}
[except
{
  section_selectors
}];
```

where the rest of the directive selects sections to include in the block. See *Section selection*, page 423.

### Parameters

|                       |                                                                                                                                                 |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>by copy</code>  | Splits the section into sections for initializers and initialized data, and handles the initialization at application startup automatically.    |
| <code>manually</code> | Splits the section into sections for initializers and initialized data. The initialization at application startup is not handled automatically. |

*algorithm*

Specifies how to handle the initializers. Choose between:

*none* - Disables compression of the selected section contents. This is the default method for initialize manually.

*zeros* - Compresses consecutive bytes with the value zero.

*packbits* - Compresses with the PackBits algorithm. This method generates good results for data with many consecutive bytes of the same value.

*lz77* - Compresses with the Lempel-Ziv-77 algorithm. This method handles a larger variety of inputs well, but has a slightly larger decompressor.

*bwt* - Compresses with the Burrows-Wheeler algorithm. This method improves the *packbits* method by transforming blocks of data before they are compressed.

*lzw* - Compresses with the Lempel-Ziv-Welch algorithm. This method uses a dictionary to store byte patterns in the data.

*auto* - Similar to *smallest*, but ILINK chooses between *none*, *packbits*, and *lz77*. This is the default method for initialize by copy.

*smallest* - ILINK estimates the resulting size using each packing method (except for *auto*), and then chooses the packing method that produces the smallest estimated size. Note that the size of the decompressor is also included.

## Description

The `initialize` directive splits the initialization section into one section holding the initializers and another section holding the initialized data. You can choose whether the initialization at startup should be handled automatically (`initialize by copy`) or whether you should handle it yourself (`initialize manually`).

When you use the packing method `auto` (default for `initialize by copy`) or `smallest`, ILINK will automatically choose an appropriate packing algorithm for the initializers. To override this, specify a different `packing method`. The `--log initialization` option shows how ILINK decided which packing algorithm to use.

When initializers are compressed, a decompressor is automatically added to the image. The decompressors for `bwt` and `lzw` use significantly more execution time and RAM than the decompressors for the other methods. Approximately 9 Kbytes of stack space is needed for `bwt` and 3.5 Kbytes for `lzw`.

When initializers are compressed, the exact size of the compressed initializers is unknown until the exact content of the uncompressed data is known. If this data contains other addresses, and some of these addresses are dependent on the size of the compressed initializers, the linker fails with error Lp017. To avoid this, place compressed initializers last, or in a memory region together with sections whose addresses do not need to be known.

Unless `initialize manually` is used, ILINK will arrange for initialization to occur during system startup by including an initialization table. Startup code calls an initialization routine that reads this table and performs the necessary initializations.

Zero-initialized sections are not affected by the `initialize` directive.

The `initialize` directive is normally used for initialized variables, but can be used for copying any sections, for example copying executable code from slow ROM to fast RAM, or for overlays. For another example, see *Define overlay directive*, page 417.

Sections that are needed for initialization are not affected by the `initialize by copy` directive. This includes the `__low_level_init` function and anything it references.

Anything reachable from the program entry label is considered *needed for initialization* unless reached via a section fragment with a label starting with `__iar_init$$$done`. The `--log sections` option, in addition to logging the marking of section fragments to be included in the application, also logs the process of determining which sections are needed for initialization.

#### Example

```
/* Copy all read-write sections automatically from ROM to RAM at
   program start */
initialize by copy { rw };
place in RAM { rw };
place in ROM { ro };
```

#### See also

*Initialization at system startup*, page 81, and *Do not initialize directive*, page 420.

## Do not initialize directive

#### Syntax

```
do not initialize
{
    section-selectors
}
[except
{
    section-selectors
}];
```

|             |                                                                                                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|             | For information about extended selectors and except clauses, see <i>Section selection</i> , page 423.                                                                                                                                                                                                                                                         |
| Description | <p>The <code>do not initialize</code> directive specifies the sections that should not be initialized by the system startup code. The directive can only be used on <code>zeroinit</code> sections.</p> <p>The compiler keyword <code>__no_init</code> places variables into sections that must be handled by a <code>do not initialize</code> directive.</p> |
| Example     | <pre>/* Do not initialize read-write sections whose name ends with    _noinit at program start */ do not initialize { rw section .*_noinit }; place in RAM { rw section .*_noinit };</pre>                                                                                                                                                                    |
| See also    | <i>Initialization at system startup</i> , page 81, and <i>Initialize directive</i> , page 418.                                                                                                                                                                                                                                                                |

## Keep directive

|             |                                                                                                                                                                                           |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <pre>keep {     section-selectors } [except {     section-selectors }];</pre> <p>For information about extended selectors and except clauses, see <i>Section selection</i>, page 423.</p> |
| Description | The <code>keep</code> directive specifies that all selected sections should be kept in the executable image, even if there are no references to the sections.                             |
| Example     | <pre>keep { section .keep* } except {section .keep};</pre>                                                                                                                                |

## Place at directive

### Syntax

```
[ "name": ]
place at { address [ memory: ] expr | start of region_expr |
          end of region_expr }
{
    extended-selectors
}
[except
 {
    section-selectors
 }];
```

For information about extended selectors and except clauses, see *Section selection*, page 423.

### Parameters

|                             |                                                                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>memory: expr</i>         | A specific address in a specific memory. The address must be available in the supplied memory defined by the <code>define memory</code> directive. The memory specifier is optional if there is only one memory. |
| <i>start of region_expr</i> | A region expression that results in a single-internal region. The start of the interval is used.                                                                                                                 |
| <i>end of region_expr</i>   | A region expression that results in a single-internal region. The end of the interval is used.                                                                                                                   |

### Description

The `place at` directive places sections and blocks either at a specific address or, at the beginning or the end of a region. The same address cannot be used for two different `place at` directives. It is also not possible to use an empty region in a `place at` directive. If placed in a region, the sections and blocks will be placed before any other sections or blocks placed in the same region with a `place in` directive.

The *name*, if specified, is used in the map file and in some log messages.

### Example

```
/* Place the read-only section .startup at the beginning of the
   code_region */
"START": place at start of ROM { readonly section .startup };
```

### See also

*Place in directive*, page 423.

## Place in directive

### Syntax

```
[ "name": ]
place in region-expr
{
    extended-selectors
}
[except{
    section-selectors
}];
```

where *region-expr* is a region expression, see also *Regions*, page 412.

and where the rest of the directive selects sections to include in the block. See *Section selection*, page 423.

### Description

The `place in` directive places sections and blocks in a specific region. The sections and blocks will be placed in the region in an arbitrary order.

To specify a specific order, use the `block` directive. The region can have several ranges.

The *name*, if specified, is used in the map file and in some log messages.

### Example

```
/* Place the read-only sections in the code_region */
"ROM": place in ROM { readonly };
```

### See also

*Place at directive*, page 422.

---

## Section selection

The purpose of *section selection* is to specify—by means of *section selectors* and *except clauses*—the sections that an ILINK directive should be applied to. All sections that match one or more of the section selectors will be selected, and none of the sections selectors in the *except* clause, if any. Each section selector can match sections on section attributes, section name, and object or library name.

Some directives provide functionality that requires more detailed selection capabilities, for example directives that can be applied on both sections and blocks. In this case, the *extended-selectors* are used.

## Section-selectors

### Syntax

```
{ [ section-selector ] [ , section-selector... ] }
```

where *section-selector* is:

```
[ section-attribute ] [ section-type ] [ section sectionname ]
  [object {module | filename } ]
```

where *section-attribute* is:

```
[ ro [ code | data ] | rw [ code | data ] | zi ]
```

and where *ro*, *rw*, and *zi* also can be readonly, readwrite, and zeroinit, respectively.

And *section-type* is:

```
[ preinit_array | init_array ]
```

## Parameters

|                               |                                                                                                                                                                                                                                                       |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>ro</i> or <i>readonly</i>  | Read-only sections.                                                                                                                                                                                                                                   |
| <i>rw</i> or <i>readwrite</i> | Read/write sections.                                                                                                                                                                                                                                  |
| <i>zi</i> or <i>zeroinit</i>  | Zero-initialized sections. These sections have no content and should possibly be initialized with zeros during system startup.                                                                                                                        |
| <i>code</i>                   | Sections that contain code.                                                                                                                                                                                                                           |
| <i>data</i>                   | Sections that contain data.                                                                                                                                                                                                                           |
| <i>preinit_array</i>          | Sections of the ELF section type <code>SHT_PREINIT_ARRAY</code> .                                                                                                                                                                                     |
| <i>init_array</i>             | Sections of the ELF section type <code>SHT_INIT_ARRAY</code> .                                                                                                                                                                                        |
| <i>sectionname</i>            | The section name. Two wildcards are allowed:<br>? matches any single character<br>* matches zero or more characters.                                                                                                                                  |
| <i>module</i>                 | A name in the form <i>objectname(libraryname)</i> . Sections from object modules where both the object name and the library name match their respective patterns are selected. An empty library name pattern selects only sections from object files. |
| <i>filename</i>               | The name of an object file, a library, or an object in a library. Two wildcards are allowed:<br>? matches any single character<br>* matches zero or more characters.                                                                                  |



## Description

A section selector selects all sections that match the section attribute, section type, section name, and the name of the *object*, where *object* is an object file, a library, or an object in a library. Up to three of the four conditions can be omitted. If the section attribute is omitted, any section will be selected, without restrictions on the section attribute. If the section type is omitted, sections of any type will be selected.

If the section name part or the object name part is omitted, sections will be selected without restrictions on the section name or object name, respectively.

It is also possible to use only `{ }` without any section selectors, which can be useful when defining blocks.

Note that a section selector with narrower scope has higher priority than a more generic section selector.

If more than one section selector matches for the same purpose, one of them must be more specific. A section selector is more specific than another one if:

- It specifies a section type and the other one does not
- It specifies a section name or object name with no wildcards and the other one does not
- There could be sections that match the other selector that also match this one, and the reverse is not true.

| Selector 1           | Selector 2         | More specific |
|----------------------|--------------------|---------------|
| section "foo*"       | section "f*"       | Selector 1    |
| section "*x"         | section "f*"       | Neither       |
| ro code section "f*" | ro section "f*"    | Selector 1    |
| init_array           | ro section "xx"    | Selector 1    |
| section ".intvec"    | ro section ".int*" | Selector 1    |
| section ".intvec"    | object "foo.o"     | Neither       |

Table 41: Examples of section selector specifications

## Example

```
{ rw } /* Selects all read-write sections */

{ section .mydata* } /* Selects only .mydata* sections */
/* Selects .mydata* sections available in the object special.o */
{ section .mydata* object special.o }
```

Assuming a section in an object named `foo.o` in a library named `lib.a`, any of these selectors will select that section:

```
object foo.o(lib.a)
object f*(lib*)
object foo.o
object lib.a
```

See also

*Initialize directive*, page 418, *Do not initialize directive*, page 420, and *Keep directive*, page 421.

## Extended-selectors

### Syntax

```
{ [ extended-selector ] [, extended-selector... ] }
```

where *extended-selector* is:

```
[ first | last | midway ]
    { section-selector |
      block name [ inline-block-def ] |
      overlay name }
```

where *inline-block-def* is:

```
[ block-params ] extended-selectors
```

### Parameters

|               |                                                                                                                                                                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>first</i>  | Places the selected sections, block, or overlay first in the containing placement directive, block, or overlay.                                                                                                                                      |
| <i>last</i>   | Places the selected sections, block or overlay last in the containing placement directive, block, or overlay.                                                                                                                                        |
| <i>midway</i> | Places the selected sections, block, or overlay so that they are no further than half the maximum size of the containing block away from either edge of the block. Note that this parameter can only be used inside a block that has a maximum size. |
| <i>name</i>   | The name of the block or overlay.                                                                                                                                                                                                                    |

### Description

Use *extended-selectors* to select content for inclusion in a placement directive, block, or overlay. In addition to using section selection patterns, you can also explicitly specify blocks or overlays for inclusion.

Using the *first* or *last* keyword, you can specify one pattern, block, or overlay that is to be placed first or last in the containing placement directive, block, or overlay. If you need more precise control of the placement order you can instead use a block with fixed order.

Blocks can be defined separately, using the `define block` directive, or inline, as part of an `extended-selector`.

The `midway` parameter is primarily useful together with a static base that can have both negative and positive offsets.

#### Example

```
define block First { ro section .f* }; /* Define a block holding
                                     any read-only section*/
                                     matching ".f*" */
define block Table { first block First, ro section .b };
                                     /* Define a block where
                                     the block First comes
                                     before the sections
                                     matching ".b*". */
```

You can also define the block `First` inline, instead of in a separate `define block` directive:

```
define block Table { first block First { ro section .f* },
                    ro section .b* };
```

#### See also

*Define block directive*, page 415, *Define overlay directive*, page 417, and *Place at directive*, page 422.

---

## Using symbols, expressions, and numbers

In the linker configuration file, you can also:

- Define and export symbols

The `define symbol` directive defines a symbol with a specified value that can be used in expressions in the configuration file. The symbol can also be exported to be used by the application or the debugger. See *Define symbol directive*, page 428, and *Export directive*, page 429.

- Use expressions and numbers

In the linker configuration file, expressions and numbers are used for specifying addresses, sizes, etc. See *Expressions*, page 429.

### Check that directive

#### Syntax

```
check that expression;
```

#### Parameters

*expression*

A boolean expression.

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>You can use the <code>check that</code> directive to compare the results of stack usage analysis against the sizes of blocks and regions. If the expression evaluates to zero, an error is emitted.</p> <p>Three extra operators are available for use only in <code>check that</code> expressions:</p> <p><code>maxstack(category)</code>      The stack depth of the deepest call chain for any call graph root function in the category.</p> <p><code>totalstack(category)</code>      The sum of the stack depths of the deepest call chains for each call graph root function in the category.</p> <p><code>size(block)</code>      The size of the block.</p> |
| Example     | <pre>check that maxstack("Program entry")            + totalstack("interrupt")            + 1K            &lt;= size(block CSTACK);</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| See also    | <i>Stack usage analysis</i> , page 84.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Define symbol directive

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>define [ exported ] symbol name = expr;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Parameters  | <p><code>exported</code>      Exports the symbol to be usable by the executable image.</p> <p><code>name</code>      The name of the symbol.</p> <p><code>expr</code>      The symbol value.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Description | <p>The <code>define symbol</code> directive defines a symbol with a specified value. The symbol can then be used in expressions in the configuration file. The symbols defined in this way work exactly like the symbols defined with the option <code>--config_def</code> outside of the configuration file.</p> <p>The <code>define exported symbol</code> variant of this directive is a shortcut for using the directive <code>define symbol</code> in combination with the <code>export symbol</code> directive. On the command line this would require both a <code>--config_def</code> option and a <code>--define_symbol</code> option to achieve the same effect.</p> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>● A symbol cannot be redefined</li> </ul> |

- Symbols that are either prefixed by `_X`, where `X` is a capital letter, or that contain `__` (double underscore) are reserved for toolset vendors.

## Example

```
/* Define the symbol my_symbol with the value 4 */
define symbol my_symbol = 4;
```

## See also

*Export directive*, page 429 and *Interaction between ILINK and the application*, page 99.

## Export directive

## Syntax

```
export symbol name;
```

## Parameters

*name*                                      The name of the symbol.

## Description

The `export` directive defines a symbol to be exported, so that it can be used both from the executable image and from a global label. The application, or the debugger, can then refer to it for setup purposes etc.

## Example

```
/* Define the symbol my_symbol to be exported */
export symbol my_symbol;
```

## Expressions

## Syntax

An expression is built up of the following constituents:

```
expression binop expression
unop expression
expression ? expression : expression
(expression)
number
symbol
func-operator
```

where *binop* is one of these binary operators:

```
+, -, *, /, %, <<, >>, <, >, ==, !=, &, ^, |, &&, ||
```

where *unop* is one of this unary operators:

```
+, -, !, ~
```

where *number* is a number, see *Numbers*, page 430

where *symbol* is a defined symbol, see *Define symbol directive*, page 428 and *--config\_def*, page 280

and where *func-operator* is one of these function-like operators:

|                                                   |                                                                    |
|---------------------------------------------------|--------------------------------------------------------------------|
| <code>minimum(<i>expr</i>, <i>expr</i>)</code>    | Returns the smallest of the two parameters.                        |
| <code>maximum(<i>expr</i>, <i>expr</i>)</code>    | Returns the largest of the two parameters.                         |
| <code>isempty(<i>r</i>)</code>                    | Returns True if the region is empty, otherwise False.              |
| <code>isdefinedsymbol(<i>expr-symbol</i> )</code> | Returns True if the expression symbol is defined, otherwise False. |
| <code>start(<i>r</i>)</code>                      | Returns the lowest address in the region.                          |
| <code>end(<i>r</i>)</code>                        | Returns the highest address in the region.                         |
| <code>size(<i>r</i>)</code>                       | Returns the size of the complete region.                           |

where *expr* is an expression, and *r* is a region expression, see *Region expression*, page 413.

#### Description

In the linker configuration file, an expression is a 65-bit value with the range  $-2^{64}$  to  $2^{64}$ . The expression syntax closely follows C syntax with some minor exceptions. There are no assignments, casts, pre- or post-operations, and no address operations (`*`, `&`, `[]`, `->`, and `.`). Some operations that extract a value from a region expression, etc, use a syntax resembling that of a function call. A boolean expression returns 0 (False) or 1 (True).

## Numbers

#### Syntax

`nr [nr-suffix]`

where *nr* is either a decimal number or a hexadecimal number (0x... or 0X...).

and where *nr-suffix* is one of:

```
K      /* Kilo = (1 << 10) 1024 */
M      /* Mega = (1 << 20) 1048576 */
G      /* Giga = (1 << 30) 1073741824 */
T      /* Tera = (1 << 40) 1099511627776 */
P      /* Peta = (1 << 50) 1125899906842624 */
```

#### Description

A number can be expressed either by normal C means or by suffixing it with a set of useful suffixes, which provides a compact way of specifying numbers.

#### Example

1024 is the same as 0x400, which is the same as 1K.

## Structural configuration

The structural directives provide means for creating structure within the configuration, such as:

- Conditional inclusion  
An `if` directive includes or excludes other directives depending on a condition, which makes it possible to have directives for several different memory configurations in the same file. See *If directive*, page 431.
- Dividing the linker configuration file into several different files  
The `include` directive makes it possible to divide the configuration file into several logically distinct files. See *Include directive*, page 431.

### If directive

#### Syntax

```
if (expr) {
    directives
[ ] else if (expr) {
    directives ]
[ ] else {
    directives ]
}
```

where *expr* is an expression, see *Expressions*, page 429.

#### Parameters

*directives*                      Any ILINK directive.

#### Description

An `if` directive includes or excludes other directives depending on a condition, which makes it possible to have directives for several different memory configurations, for example both a banked and non-banked memory configuration, in the same file.

The directives inside an `if` part, `else if` part, or an `else` part are syntax checked and processed regardless of whether the conditional expression was true or false, but only the directives in the part where the conditional expression was true, or the `else` part if none of the conditions were true, will have any effect outside the `if` directive. The `if` directives can be nested.

#### Example

See *Empty region*, page 414.

### Include directive

#### Syntax

```
include "filename";
```

Parameters

*filename*

A path where both / and \ can be used as the directory delimiter.

Description

The `include` directive makes it possible to divide the configuration file into several logically distinct parts, each in a separate file. For instance, there might be parts that you need to change often and parts that you seldom edit.



# Section reference

- Section reference
- Descriptions of sections and blocks

For more information about sections, see the chapter *Modules and sections*, page 76.

---

## Summary of sections

This table lists the ELF sections and blocks that are used by the IAR build tools:

| Section                        | Description                                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <code>.bss</code>              | Holds zero-initialized static and global variables.                                                             |
| <code>CSTACK</code>            | Holds the stack used by C or C++ programs.                                                                      |
| <code>.data</code>             | Holds static and global initialized variables.                                                                  |
| <code>.data_init</code>        | Holds initial values for <code>.data</code> sections when the linker directive <code>initialize</code> is used. |
| <code>__DLIB_PERTHREAD</code>  | Holds variables that contain static states for DLIB modules.                                                    |
| <code>.exc.text</code>         | Holds exception-related code.                                                                                   |
| <code>HEAP</code>              | Holds the heap used for dynamically allocated data.                                                             |
| <code>.iar.dynexit</code>      | Holds the <code>atexit</code> table.                                                                            |
| <code>.init_array</code>       | Holds a table of dynamic initialization functions.                                                              |
| <code>.intvec</code>           | Holds the reset vector table                                                                                    |
| <code>IRQ_STACK</code>         | Holds the stack for interrupt requests, IRQ, and exceptions.                                                    |
| <code>.noinit</code>           | Holds <code>__no_init</code> static and global variables.                                                       |
| <code>.preinit_array</code>    | Holds a table of dynamic initialization functions.                                                              |
| <code>.prepreinit_array</code> | Holds a table of dynamic initialization functions.                                                              |
| <code>.rodata</code>           | Holds constant data.                                                                                            |
| <code>.text</code>             | Holds the program code.                                                                                         |
| <code>.textrw</code>           | Holds <code>__ramfunc</code> declared program code.                                                             |
| <code>.textrw_init</code>      | Holds initializers for the <code>.textrw</code> declared section.                                               |

*Table 42: Section summary*

In addition to the ELF sections used for your application, the tools use a number of other ELF sections for a variety of purposes:

- Sections starting with `.debug` generally contain debug information in the DWARF format
- Sections starting with `.iar.debug` contain supplemental debug information in an IAR format
- The section `.comment` contains the tools and command lines used for building the file
- Sections starting with `.rel` or `.rela` contain ELF relocation information
- The section `.symtab` contains the symbol table for a file
- The section `.strtab` contains the names of the symbol in the symbol table
- The section `.shstrtab` contains the names of the sections.

---

## Descriptions of sections and blocks

This section gives reference information about each section, where the:

- *Description* describes what type of content the section is holding and, where required, how the section is treated by the linker
- *Memory placement* describes memory placement restrictions.

For information about how to allocate sections in memory by modifying the linker configuration file, see *Placing code and data—the linker configuration file*, page 79.

### **.bss**

|                  |                                                     |
|------------------|-----------------------------------------------------|
| Description      | Holds zero-initialized static and global variables. |
| Memory placement | This section can be placed anywhere in memory.      |

### **CSTACK**

|                  |                                              |
|------------------|----------------------------------------------|
| Description      | Block that holds the internal data stack.    |
| Memory placement | This block can be placed anywhere in memory. |
| See also         | <i>Setting up stack memory</i> , page 95.    |

**.data**

|                  |                                                                                                                                                                                                                                                                                                              |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description      | Holds static and global initialized variables. In object files, this includes the initial values. When the linker directive <code>initialize</code> is used, a corresponding <code>.data_init</code> section is created for each <code>.data</code> section, holding the possibly compressed initial values. |
| Memory placement | This section can be placed anywhere in memory.                                                                                                                                                                                                                                                               |

**.data\_init**

|                  |                                                                                                                                                                              |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description      | Holds the possibly compressed initial values for <code>.data</code> sections. This section is created by the linker if the <code>initialize</code> linker directive is used. |
| Memory placement | This section can be placed anywhere in memory.                                                                                                                               |

**\_\_DLIB\_PERTHREAD**

|                  |                                                                                                                                                                                                                                                                                                         |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description      | Holds thread-local static and global initialized variables used by the main thread.<br><br>This section is placed automatically. If you change the placement, you must not change its initialization. The initialization of this section must be controlled with the <code>initialize</code> directive. |
| Memory placement | This section can be placed anywhere in memory.                                                                                                                                                                                                                                                          |
| See also         | <i>Managing a multithreaded environment</i> , page 133.                                                                                                                                                                                                                                                 |

**.exc.text**

|                  |                                                                              |
|------------------|------------------------------------------------------------------------------|
| Description      | Holds code that is only executed when your application handles an exception. |
| Memory placement | In the same memory as <code>.text</code> .                                   |
| See also         | <i>Exception handling</i> , page 178.                                        |

**HEAP**

|             |                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Holds the heap used for dynamically allocated data in memory, in other words data allocated by <code>malloc</code> and <code>free</code> , and in C++, <code>new</code> and <code>delete</code> . |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Memory placement This section can be placed anywhere in memory.

See also *Setting up heap memory*, page 95.

## **.iar.dynexit**

Description Holds the table of calls to be made at exit.

Memory placement This section can be placed anywhere in memory.

See also *Setting up the atexit limit*, page 95.

## **.init\_array**

Description Holds pointers to routines to call for initializing one or more C++ objects with static storage duration.

Memory placement This section can be placed anywhere in memory.

## **.intvec**

Description Holds the reset vector table and exception vectors which contain branch instructions to `cstartup`, interrupt service routines etc.

Memory placement Must be placed at address range 0x00 to 0x3F.

## **IRQ\_STACK**

Description Holds the stack which is used when servicing IRQ exceptions. Other stacks may be added as needed for servicing other exception types: FIQ, SVC, ABT, and UND. The `cstartup.s` file must be modified to initialize the exception stack pointers used.

**Note:** This section is not used when compiling for Cortex-M.

Memory placement This section can be placed anywhere in memory.

See also *Exception stack*, page 188

**.noinit**

|                  |                                                           |
|------------------|-----------------------------------------------------------|
| Description      | Holds static and global <code>__no_init</code> variables. |
| Memory placement | This section can be placed anywhere in memory.            |

**.preinit\_array**

|                  |                                                                                                                       |
|------------------|-----------------------------------------------------------------------------------------------------------------------|
| Description      | Like <code>.init_array</code> , but is used by the library to make some C++ initializations happen before the others. |
| Memory placement | This section can be placed anywhere in memory.                                                                        |
| See also         | <code>.init_array</code> , page 436.                                                                                  |

**.prepreinit\_array**

|                  |                                                                                                                                                                   |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description      | Like <code>.init_array</code> , but is used when C static initialization is rewritten as dynamic initialization. Performed before all C++ dynamic initialization. |
| Memory placement | This section can be placed anywhere in memory.                                                                                                                    |
| See also         | <code>.init_array</code> , page 436.                                                                                                                              |

**.rodata**

|                  |                                                                                               |
|------------------|-----------------------------------------------------------------------------------------------|
| Description      | Holds constant data. This can include constant variables, string and aggregate literals, etc. |
| Memory placement | This section can be placed anywhere in memory.                                                |

**.text**

|                  |                                                                   |
|------------------|-------------------------------------------------------------------|
| Description      | Holds program code, including the code for system initialization. |
| Memory placement | This section can be placed anywhere in memory.                    |

### **.textrw**

|                  |                                                     |
|------------------|-----------------------------------------------------|
| Description      | Holds <code>__ramfunc</code> declared program code. |
| Memory placement | This section can be placed anywhere in memory.      |
| See also         | <code>__ramfunc</code> , page 328.                  |

### **.textrw\_init**

|                  |                                                                    |
|------------------|--------------------------------------------------------------------|
| Description      | Holds initializers for the <code>.textrw</code> declared sections. |
| Memory placement | This section can be placed anywhere in memory.                     |
| See also         | <code>__ramfunc</code> , page 328.                                 |

# The stack usage control file

- Overview
- Stack usage control directives
- Syntactic components

Before you read this chapter, see *Stack usage analysis*, page 84.

---

## Overview

A stack usage control file consists of a sequence of directives that control stack usage analysis. You can use C ("*/\*...\*/*") and C++ ("*//...*") comments in these files.

The default filename extension for stack usage control files is `.suc`.

### C++ NAMES

When you specify the name of a C++ function in a stack usage control file, you must use the name exactly as used by the linker. Both the number and names of parameters, as well as the names of types must match. However, most non-significant white-space differences are accepted. In particular, you must enclose the name in quote marks because all C++ function names include non-identifier characters.

You can also use wildcards in function names. "`##`" matches any sequence of characters, and "`#?`" matches a single character. This makes it possible to write function names that will match any instantiation of a template function.

Examples:

```
"operator new(unsigned int)"
"ostream::flush()" // EC++
"std::ostream::flush()" // C++
"operator <<(ostream &, char const *)"
"void _Sort<##>(##, ##, ##)"
```

---

## Stack usage control directives

This section gives detailed reference information about each stack usage control directive.

## function directive

|             |                                                                                                                                                                                                                                                                                                                                                                                                    |                                     |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Syntax      | <code>[ override ] function [ category ] function-spec : stack-size<br/>[ , call-info... ];</code>                                                                                                                                                                                                                                                                                                 |                                     |
| Parameters  | <i>category</i>                                                                                                                                                                                                                                                                                                                                                                                    | See <i>category</i> , page 443      |
|             | <i>function-spec</i>                                                                                                                                                                                                                                                                                                                                                                               | See <i>function-spec</i> , page 443 |
|             | <i>call-info</i>                                                                                                                                                                                                                                                                                                                                                                                   | See <i>call-info</i> , page 444     |
|             | <i>stack-size</i>                                                                                                                                                                                                                                                                                                                                                                                  | See <i>stack-size</i> , page 444    |
| Description | Specifies what the maximum stack usage is in a function and which other functions that are called from that function.<br><br>Normally, an error is issued if there already is stack usage information for the function, but if you start with <code>override</code> , the error will be suppressed and the information supplied in the directive will be used instead of the previous information. |                                     |
| Example     | <pre>function MyFunc1: 32,     calls MyFunc2,     calls MyFunc3, MyFunc4: 16;  function [interrupt] nmi: 44</pre>                                                                                                                                                                                                                                                                                  |                                     |

## exclude directive

|             |                                                                                                        |                                     |
|-------------|--------------------------------------------------------------------------------------------------------|-------------------------------------|
| Syntax      | <code>exclude function-spec [ , function-spec... ];</code>                                             |                                     |
| Parameters  | <i>function-spec</i>                                                                                   | See <i>function-spec</i> , page 443 |
| Description | Excludes the specified functions, and call trees originating with them, from stack usage calculations. |                                     |
| Example     | <code>exclude fun1, fun2;</code>                                                                       |                                     |



## possible calls directive

|             |                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Syntax      | <code>possible calls <i>calling-func</i> : <i>called-func</i> [ , <i>called-func</i>... ] ;</code>                                                                                                                                                                                                                                                                                                                |                                     |
| Parameters  | <i>calling-func</i>                                                                                                                                                                                                                                                                                                                                                                                               | See <i>function-spec</i> , page 443 |
|             | <i>called-func</i>                                                                                                                                                                                                                                                                                                                                                                                                | See <i>function-spec</i> , page 443 |
| Description | Specifies an exhaustive list of possible destinations for all indirect calls in one function. Use this for functions which are known to perform indirect calls and where you know exactly which functions that might be called in this particular application. Consider using the <code>#pragma calls</code> directive if the information about which functions that might be called is available when compiling. |                                     |
| Example     | <code>possible calls afun: bfun, cfun;</code>                                                                                                                                                                                                                                                                                                                                                                     |                                     |
| See also    | <i>calls</i> , page 336.                                                                                                                                                                                                                                                                                                                                                                                          |                                     |

## call graph root directive

|             |                                                                                                                                                                                                                                                                                                                                                                                         |                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Syntax      | <code>call graph root [ <i>category</i> ] : <i>function-spec</i> [ , <i>function-spec</i>... ] ;</code>                                                                                                                                                                                                                                                                                 |                                     |
| Parameters  | <i>category</i>                                                                                                                                                                                                                                                                                                                                                                         | See <i>category</i> , page 443      |
|             | <i>function-spec</i>                                                                                                                                                                                                                                                                                                                                                                    | See <i>function-spec</i> , page 443 |
| Description | Specifies that the listed functions are call graph roots. You can optionally specify a call graph root category. Call graph roots are listed under their category in the <i>Stack Usage</i> chapter in the linker map file.<br><br>The linker will normally issue a warning for functions needed in the application that are not call graph roots and which do not appear to be called. |                                     |
| Example     | <code>call graph root [task]: fun1, fun2;</code>                                                                                                                                                                                                                                                                                                                                        |                                     |
| See also    | <i>call_graph_root</i> , page 337.                                                                                                                                                                                                                                                                                                                                                      |                                     |

## max recursion depth directive

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Syntax      | <code>max recursion depth <i>function-spec</i> : <i>size</i>;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                     |
| Parameters  | <i>function-spec</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | See <i>function-spec</i> , page 443 |
|             | <i>size</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | See <i>size</i> , page 445          |
| Description | <p>Specifies the maximum number of iterations through any of the cycles in the recursion nest of which the function is a member.</p> <p>A recursion nest is a set of cycles in the call graph where each cycle shares at least one node with another cycle in the nest.</p> <p>Stack usage analysis will base its result on the max recursion depth multiplied by the stack usage of the deepest cycle in the nest. If the nest is not entered on a point along one of the deepest cycles, no stack usage result will be calculated for such calls.</p> |                                     |
| Example     | <code>max recursion depth fun1: 10;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |

## no calls from directive

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Syntax      | <code>no calls from <i>module-spec</i> to <i>function-spec</i> [<i>,</i> <i>function-spec</i>... ];</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                     |
| Parameters  | <i>function-spec</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | See <i>function-spec</i> , page 443 |
|             | <i>module-spec</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | See <i>module-spec</i> , page 443   |
| Description | <p>When you provide stack usage information for some functions in a module without stack usage information, the linker warns about functions that are referenced from the module but not listed as called. This is primarily to help avoid problems with C runtime routines, calls to which are generated by the compiler, beyond user control.</p> <p>If there actually is no call to some of these functions, use the <code>no calls from</code> directive to selectively suppress the warning for the specified functions. You can also disable the warning entirely (<code>--diag_suppress</code> or <b>Project&gt;Options&gt;Linker&gt;Diagnostics&gt;Suppress these diagnostics</b>).</p> |                                     |
| Example     | <code>no calls from [file.o] to fun1, fun2;</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                     |

## Syntactic components

The stack usage control directives use some syntactical components. These are described below.

### **category**

|             |                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------|
| Syntax      | [ <i>name</i> ]                                                                               |
| Description | A call graph root category. You can use any name you like. Categories are not case-sensitive. |
| Example     | category examples:<br><br>[interrupt]<br>[task]                                               |

### **function-spec**

|             |                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | [ ? ] <i>name</i> [ <i>module-spec</i> ]                                                                                                                                                                                                      |
| Description | Specifies the name of a symbol, and for module-local symbols, the name of the module it is defined in. Normally, if the function-spec does not match a symbol in the program, a warning is emitted. Prefixing with ? suppresses this warning. |
| Example     | <i>function-spec</i> examples:<br><br>xFun<br>MyFun [file.o]<br>?"fun1(int) "                                                                                                                                                                 |

### **module-spec**

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | [name [ ( <i>name</i> ) ]]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description | Specifies the name of a module, and optionally, in parentheses, the name of the library it belongs to. To distinguish between modules with the same name, you can specify: <ul style="list-style-type: none"> <li>● The complete path of the file ("D:\C1\test\file.o")</li> <li>● As many path elements as are needed at the end of the path ("test\file.o")</li> <li>● Some path elements at the start of the path, followed by "...", followed by some path elements at the end ("D:\...\file.o").</li> </ul> |

Note that when using multi-file compilation (`--mfc`), multiple files are compiled into a single module, named after the first file.

Example `module-spec` examples:

```
[file.o]
[file.o(lib.a)]
["D:\C1\test\file.o"]
```

## ***name***

Description A name can be either an identifier or a quoted string.

The first character of an identifier must be either a letter or one of the characters "\_", "\$", or ".". The rest of the characters can also be digits.

A quoted string starts and ends with " and can contain any character. Two consecutive " characters can be used inside a quoted string to represent a single ".

Example `name` examples:

```
MyFun
file.o
"file-1.o"
```

## ***call-info***

Syntax `calls function-spec [ , function-spec... ] [ : stack-size ]`

Description Specifies one or more called functions, and optionally, the stack size at the calls.

Example `call-info` examples:

```
calls MyFunc1 : stack 16
calls MyFunc2, MyFunc3, MyFunc4
```

## ***stack-size***

Syntax `[ stack ] size`

Description Specifies the size of a stack frame.

Example *stack-size* examples:  
24  
stack 28

## **size**

Description A decimal integer, or 0x followed by a hexadecimal integer. Either alternative can optionally be followed by a suffix indicating a power of two (K=210, M=220, G=230, T=240, P=250).

Example *size* examples:  
24  
0x18  
2048  
2K



# IAR utilities

- The IAR Archive Tool—`iarchive`—creates and manipulates a library (an archive) of several ELF object files
- The IAR ELF Tool—`ielftool`—performs various transformations on an ELF executable image (such as fill, checksum, format conversions, etc)
- The IAR ELF Dumper—`ielfdump`—creates a text representation of the contents of an ELF relocatable or executable image
- The IAR ELF Object Tool—`iobjmanip`—is used for performing low-level manipulation of ELF object files
- The IAR Absolute Symbol Exporter—`ismexport`—exports absolute symbols from a ROM image file, so that they can be used when you link an add-on application.

---

## The IAR Archive Tool—`iarchive`

The IAR Archive Tool, `iarchive`, can create a library (an archive) file from several ELF object files. You can also use `iarchive` to manipulate ELF libraries.

A library file contains several relocatable ELF object modules, each of which can be independently used by a linker. In contrast with object modules specified directly to the linker, each module in a library is only included if it is needed.

For information about how to build a library in the IDE, see the *IDE Project Management and Building Guide for ARM*.

### INVOCATION SYNTAX

The invocation syntax for the archive builder is:

```
iarchive parameters
```

## Parameters

The parameters are:

| Parameter                                    | Description                                                                                                                          |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <i>command</i>                               | Command line options that define an operation to be performed. Such an option must be specified before the name of the library file. |
| <i>libraryfile</i>                           | The library file to be operated on.                                                                                                  |
| <i>objectfile1</i> ...<br><i>objectfileN</i> | The object file(s) that the specified command operates on.                                                                           |
| <i>options</i>                               | Command line options that define actions to be performed. These options can be placed anywhere on the command line.                  |

Table 43: *iarchive* parameters

## Examples

This example creates a library file called `mylibrary.a` from the source object files `module1.o`, `module2.o`, and `module3.o`:

```
iarchive mylibrary.a module1.o module2.o module3.o.
```

This example lists the contents of `mylibrary.a`:

```
iarchive --toc mylibrary.a
```

This example replaces `module3.o` in the library with the content in the `module3.o` file and appends `module4.o` to `mylibrary.a`:

```
iarchive --replace mylibrary.a module3.o module4.o
```

## SUMMARY OF IARCHIVE COMMANDS

This table summarizes the `iarchive` commands:

| Command line option        | Description                                                 |
|----------------------------|-------------------------------------------------------------|
| <code>--create</code>      | Creates a library that contains the listed object files.    |
| <code>--delete, -d</code>  | Deletes the listed object files from the library.           |
| <code>--extract, -x</code> | Extracts the listed object files from the library.          |
| <code>--replace, -r</code> | Replaces or appends the listed object files to the library. |
| <code>--symbols</code>     | Lists all symbols defined by files in the library.          |
| <code>--toc, -t</code>     | Lists all files in the library.                             |

Table 44: *iarchive* commands summary

For more information, see *Descriptions of options*, page 461.



## SUMMARY OF IARCHIVE OPTIONS

This table summarizes the `iarchive` options:

| Command line option        | Description                       |
|----------------------------|-----------------------------------|
| <code>-f</code>            | Extends the command line.         |
| <code>--output, -o</code>  | Specifies the library file.       |
| <code>--silent</code>      | Sets silent operation.            |
| <code>--verbose, -V</code> | Reports all performed operations. |

Table 45: *iarchive* options summary

For more information, see *Descriptions of options*, page 461.

## DIAGNOSTIC MESSAGES

This section lists the messages produced by `iarchive`:

### **La001: could not open file *filename***

`iarchive` failed to open an object file.

### **La002: illegal path *pathname***

The path *pathname* is not a valid path.

### **La006: too many parameters to *cmd* command**

A list of object modules was specified as parameters to a command that only accepts a single library file.

### **La007: too few parameters to *cmd* command**

A command that takes a list of object modules was issued without the expected modules.

### **La008: *lib* is not a library file**

The library file did not pass a basic syntax check. Most likely the file is not the intended library file.

### **La009: *lib* has no symbol table**

The library file does not contain the expected symbol information. The reason might be that the file is not the intended library file, or that it does not contain any ELF object modules.

**La010: no library parameter given**

The tool could not identify which library file to operate on. The reason might be that a library file has not been specified.

**La011: file *file* already exists**

The file could not be created because a file with the same name already exists.

**La013: file confusions, *lib* given as both library and object**

The library file was also mentioned in the list of object modules.

**La014: module *module* not present in archive *lib***

The specified object module could not be found in the archive.

**La015: internal error**

The invocation triggered an unexpected error in `iarchive`.

**Ms003: could not open file *filename* for writing**

`iarchive` failed to open the archive file for writing. Make sure that it is not write protected.

**Ms004: problem writing to file *filename***

An error occurred while writing to file `filename`. A possible reason for this is that the volume is full.

**Ms005: problem closing file *filename***

An error occurred while closing the file `filename`.

---

## The IAR ELF Tool—ielftool

The IAR ELF Tool, `ielftool`, can generate a checksum on specific ranges of memories. This checksum can be compared with a checksum calculated on your application.

The source code for `ielftool` and a Microsoft VisualStudio 2005 template project are available in the `arm\src\elfutils` directory. If you have specific requirements for how the checksum should be generated or requirements for format conversion, you can modify the source code accordingly.

## INVOCATION SYNTAX

The invocation syntax for the IAR ELF Tool is:

```
ielftool [options] inputfile outputfile [options]
```

The `ielftool` tool will first process all the fill options, then it will process all the checksum options (from left to right).

### Parameters

The parameters are:

| Parameter         | Description                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------|
| <i>inputfile</i>  | An absolute ELF executable image produced by the ILINK linker.                                |
| <i>options</i>    | Any of the available command line options, see <i>Summary of ielftool options</i> , page 451. |
| <i>outputfile</i> | An absolute ELF executable image.                                                             |

Table 46: *ielftool* parameters

See also *Rules for specifying a filename or directory as parameters*, page 232.

### Example

This example fills a memory range with `0xFF` and then calculates a checksum on the same range:

```
ielftool my_input.out my_output.out --fill 0xFF;0-0xFF
      --checksum __checksum:4,crc32;0-0xFF
```

## SUMMARY OF IELFTOOL OPTIONS

This table summarizes the `ielftool` command line options:

| Command line option       | Description                                             |
|---------------------------|---------------------------------------------------------|
| <code>--bin</code>        | Sets the format of the output file to binary.           |
| <code>--checksum</code>   | Generates a checksum.                                   |
| <code>--fill</code>       | Specifies fill requirements.                            |
| <code>--ihex</code>       | Sets the format of the output file to linear Intel hex. |
| <code>--parity</code>     | Generates parity bits.                                  |
| <code>--self_reloc</code> | Not for general use.                                    |
| <code>--silent</code>     | Sets silent operation.                                  |
| <code>--simple</code>     | Sets the format of the output file to Simple code.      |
| <code>--simple-ne</code>  | As <code>--simple</code> , but without an entry record. |

Table 47: *ielftool* options summary

| Command line option        | Description                                                        |
|----------------------------|--------------------------------------------------------------------|
| <code>--srec</code>        | Sets the format of the output file to Motorola S-records.          |
| <code>--srec-len</code>    | Restricts the number of data bytes in each S-record.               |
| <code>--srec-s3only</code> | Restricts the S-record output to contain only a subset of records. |
| <code>--strip</code>       | Removes debug information.                                         |
| <code>--titxt</code>       | Saves as TI-txt format.                                            |
| <code>--verbose, -V</code> | Prints all performed operations.                                   |

Table 47: *ielftool options summary (Continued)*

For more information, see *Descriptions of options*, page 461.

## The IAR ELF Dumper—ielfdump

The IAR ELF Dumper for ARM, `ielfdumparm`, can be used for creating a text representation of the contents of a relocatable or absolute ELF file.

`ielfdumparm` can be used in one of three ways:

- To produce a listing of the general properties of the input file and the ELF segments and ELF sections it contains. This is the default behavior when no command line options are used.
- To also include a textual representation of the contents of each ELF section in the input file. To specify this behavior, use the command line option `--all`.
- To produce a textual representation of selected ELF sections from the input file. To specify this behavior, use the command line option `--section`.

### INVOCATION SYNTAX

The invocation syntax for `ielfdumparm` is:

```
ielfdumparm input_file [output_file]
```

**Note:** `ielfdumparm` is a command line tool which is not primarily intended to be used in the IDE.

### Parameters

The parameters are:

| Parameter               | Description                                            |
|-------------------------|--------------------------------------------------------|
| <code>input_file</code> | An ELF relocatable or executable file to use as input. |

Table 48: *ielfdumparm parameters*

| Parameter                | Description                                                                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>output_file</code> | A file or directory where the output is emitted. If absent and no <code>--output</code> option is specified, output is directed to the console. |

Table 48: `ielfdumparm` parameters (Continued)

See also *Rules for specifying a filename or directory as parameters*, page 232.

## SUMMARY OF IELFDUMP OPTIONS

This table summarizes the `ielfdumparm` command line options:

| Command line option        | Description                                                                                                                                         |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>--all</code>         | Generates output for all input sections regardless of their names or numbers.                                                                       |
| <code>--code</code>        | Dumps all sections that contain executable code.                                                                                                    |
| <code>-f</code>            | Extends the command line.                                                                                                                           |
| <code>--output, -o</code>  | Specifies an output file.                                                                                                                           |
| <code>--no_strtab</code>   | Suppresses dumping of string table sections.                                                                                                        |
| <code>--raw</code>         | Uses the generic hexadecimal/ASCII output format for the contents of any selected section, instead of any dedicated output format for that section. |
| <code>--section, -s</code> | Generates output for selected input sections.                                                                                                       |

Table 49: `ielfdumparm` options summary

For more information, see *Descriptions of options*, page 461.

## The IAR ELF Object Tool—`iobjmanip`

Use the IAR ELF Object Tool, `iobjmanip`, to perform low-level manipulation of ELF object files.

### INVOCATION SYNTAX

The invocation syntax for the IAR ELF Object Tool is:

```
iobjmanip options inputfile outputfile
```

## Parameters

The parameters are:

| Parameter         | Description                                                                                                                                                        |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>options</i>    | Command line options that define actions to be performed. These options can be placed anywhere on the command line. At least one of the options must be specified. |
| <i>inputfile</i>  | A relocatable ELF object file.                                                                                                                                     |
| <i>outputfile</i> | A relocatable ELF object file with all the requested operations applied.                                                                                           |

Table 50: *iobjmanip* parameters

See also *Rules for specifying a filename or directory as parameters*, page 232.

## Examples

This example renames the section `.example` in `input.o` to `.example2` and stores the result in `output.o`:

```
iobjmanip --rename_section .example=.example2 input.o output.o
```

## SUMMARY OF IOBJMANIP OPTIONS

This table summarizes the `iobjmanip` options:

| Command line option             | Description                                    |
|---------------------------------|------------------------------------------------|
| <code>-f</code>                 | Extends the command line.                      |
| <code>--remove_file_path</code> | Removes path information from the file symbol. |
| <code>--rename_section</code>   | Renames a section.                             |
| <code>--rename_symbol</code>    | Renames a symbol.                              |
| <code>--strip</code>            | Removes debug information.                     |

Table 51: *iobjmanip* options summary

For more information, see *Descriptions of options*, page 461.

## DIAGNOSTIC MESSAGES

This section lists the messages produced by `iobjmanip`:

### Lm001: No operation given

None of the command line parameters specified an operation to perform.

**Lm002: Expected *nr* parameters but got *nr***

Too few or too many parameters. Check invocation syntax for `iobjmanip` and for the used command line options.

**Lm003: Invalid section/symbol renaming pattern *pattern***

The pattern does not define a valid renaming operation.

**Lm004: Could not open file *filename***

`iobjmanip` failed to open the input file.

**Lm005: ELF format error *msg***

The input file is not a valid ELF object file.

**Lm006: Unsupported section type *nr***

The object file contains a section that `iobjmanip` cannot handle. This section will be ignored when generating the output file.

**Lm007: Unknown section type *nr***

`iobjmanip` encountered an unrecognized section. `iobjmanip` will try to copy the content as is.

**Lm008: Symbol *symbol* has unsupported format**

`iobjmanip` encountered a symbol that cannot be handled. `iobjmanip` will ignore this symbol when generating the output file.

**Lm009: Group type *nr* not supported**

`iobjmanip` only supports groups of type `GRP_COMDAT`. If any other group type is encountered, the result is undefined.

**Lm010: Unsupported ELF feature in *file*: *msg***

The input file uses a feature that `iobjmanip` does not support.

**Lm011: Unsupported ELF file type**

The input file is not a relocatable object file.

**Lm012: Ambiguous rename for section/symbol name (*alt1* and *alt2*)**

An ambiguity was detected while renaming a section or symbol. One of the alternatives will be used.

**Lm013: Section *name* removed due to transitive dependency on *name***

A section was removed as it depends on an explicitly removed section.

**Lm014: File has no section with index *nr***

A section index, used as a parameter to `--remove_section` or `--rename_section`, did not refer to a section in the input file.

**Ms003: could not open file *filename* for writing**

`iobjmanip` failed to open the output file for writing. Make sure that it is not write protected.

**Ms004: problem writing to file *filename***

An error occurred while writing to file *filename*. A possible reason for this is that the volume is full.

**Ms005: problem closing file *filename***

An error occurred while closing the file *filename*.

---

## The IAR Absolute Symbol Exporter—`isymexport`

The IAR Absolute Symbol Exporter, `isymexport`, can export absolute symbols from a ROM image file, so that they can be used when you link an add-on application.

To keep symbols from your symbols file in your final application, the symbols must be referred to, either from your source code or by using the linker option `--keep`.

### INVOCATION SYNTAX

The invocation syntax for the IAR Absolute Symbol Exporter is:

```
isymexport [options] inputfile outputfile [options]
```



## Parameters

The parameters are:

| Parameter         | Description                                                                                                                                                                                                                                                                                                                                                       |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>inputfile</i>  | A ROM image in the form of an executable ELF file (output from linking).                                                                                                                                                                                                                                                                                          |
| <i>options</i>    | Any of the available command line options, see <i>Summary of isymexport options</i> , page 457.                                                                                                                                                                                                                                                                   |
| <i>outputfile</i> | A relocatable ELF file that can be used as input to linking, and which contains all or a selection of the absolute symbols in the input file. The output file contains only the symbols, not the actual code or data sections. A steering file can be used to control which symbols that are included, and also to rename some of the symbols if that is desired. |

Table 52: *isymexport* parameters

For information about specifying a filename or a directory, see *Rules for specifying a filename or directory as parameters*, page 232.



In the IDE, to add the export of library symbols, choose **Project>Options>Build Actions** and specify your command line in the **Post-build command line** text field, for example like this:

```
$TOOLKIT_DIR$\bin\isymexport.exe "$TARGET_PATH$"  
"$PROJ_DIR$\const_lib.symbols"
```

## SUMMARY OF ISYMEXPORT OPTIONS

This table summarizes the *isymexport* command line options:

| Command line option  | Description                                                                |
|----------------------|----------------------------------------------------------------------------|
| --edit               | Specifies a steering file.                                                 |
| -f                   | Extends the command line.                                                  |
| --ram_reserve_ranges | Generates symbols to reserve the areas in RAM that the image uses.         |
| --reserve_ranges     | Generates symbols to reserve the areas in ROM and RAM that the image uses. |

Table 53: *isymexport* options summary

For more information, see *Descriptions of options*, page 461.

## STEERING FILES

A steering file can be used for controlling which symbols that are included, and also to rename some of the symbols if that is desired. In the file, you can use `show` and `hide`

directives to select which public symbols from the input file that are to be included in the output file. `rename` directives can be used for changing the names of symbols in the input file.

When you use a steering file, only actively exported symbols will be available in the output file. Thus, a steering file without `show` directives will generate an output file without symbols.

## Syntax

The following syntax rules apply:

- Each directive is specified on a separate line.
- C comments (`/* . . . */`) and C++ comments (`// . . .`) can be used.
- Patterns can contain wildcard characters that match more than one possible character in a symbol name.
- The `*` character matches any sequence of zero or more characters in a symbol name.
- The `?` character matches any single character in a symbol name.

## Example

```
rename xxx_* as YYY_* /*Change symbol prefix from xxx_ to YYY_ */
show YYY_*           /* Export all symbols from YYY package */
hide *_internal      /* But do not export internal symbols */
show zzz?            /* Export zzza, but not zzzaaa */
hide zzzx            /* But do not export zzzx */
```

## Show directive

|             |                                                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>show pattern</code>                                                                                                                           |
| Parameters  | <code>pattern</code> A pattern to match against a symbol name.                                                                                      |
| Description | A symbol with a name that matches the pattern will be included in the output file unless this is overridden by a later <code>hide</code> directive. |
| Example     | <pre>/* Include all public symbols ending in _pub. */ show *_pub</pre>                                                                              |

## Hide directive

|             |                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>hide <i>pattern</i></code>                                                                                                                        |
| Parameters  | <i>pattern</i> A pattern to match against a symbol name.                                                                                                |
| Description | A symbol with a name that matches the pattern will not be included in the output file unless this is overridden by a later <code>show</code> directive. |
| Example     | <pre>/* Do not include public symbols ending in _sys. */ hide *_sys</pre>                                                                               |

## Rename directive

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax      | <code>rename <i>pattern1 pattern2</i></code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Parameters  | <p><i>pattern1</i>      A pattern used for finding symbols to be renamed. The pattern can contain no more than one <code>*</code> or <code>?</code> wildcard character.</p> <p><i>pattern2</i>      A pattern used for the new name for a symbol. If the pattern contains a wildcard character, it must be of the same kind as in <i>pattern1</i>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Description | <p>Use this directive to rename symbols from the output file to the input file. No exported symbol is allowed to match more than one <code>rename</code> pattern.</p> <p><code>rename</code> directives can be placed anywhere in the steering file, but they are executed before any <code>show</code> and <code>hide</code> directives. Thus, if a symbol will be renamed, all <code>show</code> and <code>hide</code> directives in the steering file must refer to the new name.</p> <p>If the name of a symbol matches a <i>pattern1</i> pattern that contains no wildcard characters, the symbol will be renamed <i>pattern2</i> in the output file.</p> <p>If the name of a symbol matches a <i>pattern1</i> pattern that contains a wildcard character, the symbol will be renamed <i>pattern2</i> in the output file, with part of the name matching the wildcard character preserved.</p> |
| Example     | <pre>/* xxx_start will be renamed Y_start_X in the output file,    xxx_stop will be renamed Y_stop_X in the output file. */ rename xxx_* Y*_X</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## DIAGNOSTIC MESSAGES

This section lists the messages produced by `isymexport`:

### **Es001: could not open file *filename***

`isymexport` failed to open the specified file.

### **Es002: illegal path *pathname***

The path *pathname* is not a valid path.

### **Es003: format error: *message***

A problem occurred while reading the input file.

### **Es004: no input file**

No input file was specified.

### **Es005: no output file**

An input file, but no output file was specified.

### **Es006: too many input files**

More than two files were specified.

### **Es007: input file is not an ELF executable**

The input file is not an ELF executable file.

### **Es008: unknown directive: *directive***

The specified directive in the steering file is not recognized.

### **Es009: unexpected end of file**

The steering file ended when more input was required.

### **Es010: unexpected end of line**

A line in the steering file ended before the directive was complete.

### **Es011: unexpected text after end of directive**

There is more text on the same line after the end of a steering file directive.

**Es012: expected text**

The specified text was not present in the steering file, but must be present for the directive to be correct.

**Es013: pattern can contain at most one \* or ?**

Each pattern in the current directive can contain at most one \* or one ? wildcard character.

**Es014: rename patterns have different wildcards**

Both patterns in the current directive must contain exactly the same kind of wildcard. That is, both must either contain:

- No wildcards
- Exactly one \*
- Exactly one ?

This error occurs if the patterns are not the same in this regard.

**Es014: ambiguous pattern match: *symbol* matches more than one rename pattern**

A symbol in the input file matches more than one `rename` pattern.

---

## Descriptions of options

This section gives detailed reference information about each command line option available for the different utilities.

**--all**

|              |                                                                                                                                                                                                                                                                                                                                           |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | --all                                                                                                                                                                                                                                                                                                                                     |
| For use with | ielfdumparm                                                                                                                                                                                                                                                                                                                               |
| Description  | Use this option to include the contents of all ELF sections in the output, in addition to the general properties of the input file. Sections are output in index order, except that each relocation section is output immediately after the section it holds relocations for. By default, no section contents are included in the output. |



This option is not available in the IDE.

## --bin

|              |                                               |
|--------------|-----------------------------------------------|
| Syntax       | --bin                                         |
| For use with | ielftool                                      |
| Description  | Sets the format of the output file to binary. |



To set related options, choose:

**Project>Options>Output converter**

## --checksum

|        |                                                                                                                                                                                           |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax | --checksum<br>{ <i>symbol</i> [+ <i>offset</i> ]   <i>address</i> }: <i>size</i> , <i>algorithm</i> [: [1 2] [m] [L W] [r] [i p]]<br>[, <i>start</i> ]; <i>range</i> [: <i>range</i> ...] |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Parameters

|                |                                                                                                                                      |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <i>symbol</i>  | The name of the symbol where the checksum value should be stored. Note that it must exist in the symbol table in the input ELF file. |
| <i>offset</i>  | An offset to the symbol.                                                                                                             |
| <i>address</i> | The absolute address where the checksum value should be stored.                                                                      |
| <i>size</i>    | The number of bytes in the checksum: 1, 2, or 4; must not be larger than the size of the checksum symbol.                            |

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <i>algorithm</i> | <p>The checksum algorithm used, one of:</p> <ul style="list-style-type: none"> <li>• <code>sum</code>, a byte-wise calculated arithmetic sum. The result is truncated to 8 bits.</li> <li>• <code>sum8wide</code>, a byte-wise calculated arithmetic sum. The result is truncated to the size of the symbol.</li> <li>• <code>sum32</code>, a word-wise (32 bits) calculated arithmetic sum.</li> <li>• <code>crc16</code>, CRC16 (generating polynomial 0x11021); used by default.</li> <li>• <code>crc32</code>, CRC32 (generating polynomial 0x104C11DB7).</li> <li>• <code>crc64iso</code>, CRC64iso (generating polynomial 0x1B).</li> <li>• <code>crc64ecma</code>, CRC64ECMA (generating polynomial 0x42F0E1EBA9EA3693).</li> <li>• <code>crc=n</code>, CRC with a generating polynomial of <i>n</i>.</li> </ul> |
| <i>1 2</i>       | <p>If specified, can be one of:</p> <ul style="list-style-type: none"> <li>• 1 - Specifies one's complement.</li> <li>• 2 - Specifies two's complement.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <i>m</i>         | Reverses the order of the bits within each byte when calculating the checksum.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <i>L W</i>       | <p>Specifies the size of the unit for which a checksum should be calculated.</p> <p>Choose between:</p> <p><code>L</code>, calculates a checksum on 32 bits in every iteration</p> <p><code>w</code>, calculates a checksum on 16 bits in every iteration.</p> <p>If you do not specify a unit size, 8 bits will be used by default. Using these parameters does not add any additional error detection power to the checksum.</p>                                                                                                                                                                                                                                                                                                                                                                                      |
| <i>r</i>         | Reverses the byte order of the input data within each word of size <i>size</i> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                    |                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>i p</code>   | Use either <code>i</code> or <code>p</code> , if the <code>start</code> value is bigger than 0. If specified, can be one of: <ul style="list-style-type: none"> <li>• <code>i</code> - Initializes the checksum value with the start value.</li> <li>• <code>p</code> - Prefixes the input data with a word of size <code>size</code> that contains the <code>start</code> value.</li> </ul> |
| <code>start</code> | By default, the initial value of the checksum is 0. If necessary, use <code>start</code> to supply a different initial value. If not 0, then either <code>i</code> or <code>p</code> must be specified.                                                                                                                                                                                      |
| <code>range</code> | The address range on which the checksum should be calculated. Hexadecimal and decimal notation is allowed (for example, <code>0x8002-0x8FFF</code> ).                                                                                                                                                                                                                                        |

For use with

`ielftool`

Description

Use this option to calculate a checksum with the specified algorithm for the specified ranges. If you have an external definition for the checksum (for example, a hardware CRC implementation), use the appropriate parameters to the `--checksum` option to match the external design. (In this case, learn more about that design in the hardware documentation.) The checksum will then replace the original value in `symbol`. A new absolute symbol will be generated; with the `symbol` name suffixed with `_value` containing the calculated checksum. This symbol can be used for accessing the checksum value later when needed, for example during debugging.

If the `--checksum` option is used more than once on the command line, the options are evaluated from left to right. If a checksum is calculated for a `symbol` that is specified in a later evaluated `--checksum` option, an error is issued.

Example

This example shows how to use the `crc16` algorithm with the start value 0 over the address range `0x8000-0x8FFF`:

```
ielftool --checksum=__checksum:2,crc16;0x8000-0x8FFF
sourceFile.out destinationFile.out
```

The input data `i` read from `sourceFile.out`, and the resulting checksum value of size 2 bytes will be stored at the symbol `__checksum`. The modified ELF file is saved as `destinationFile.out` leaving `sourceFile.out` untouched.

See also

*Checksum calculation*, page 192



To set related options, choose:

**Project>Options>Linker>Checksum**



**--code**

|              |                                                                                                                                          |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--code</code>                                                                                                                      |
| For use with | <code>ielfdump</code>                                                                                                                    |
| Description  | Use this option to dump all sections that contain executable code (sections with the ELF section attribute <code>SHF_EXECINSTR</code> ). |



This option is not available in the IDE.

**--create**

|              |                                                                                                                                                                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--create libraryfile objectfile1 ... objectfileN</code>                                                                                                                                                                                               |
| Parameters   | <p><i>libraryfile</i>      The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i>, page 232.</p> <p><i>objectfile1 ... objectfileN</i>      The object file(s) to build the library from.</p> |
| For use with | <code>iarchive</code>                                                                                                                                                                                                                                       |
| Description  | Use this command to build a new library from a set of object files (modules). The object files are added to the library in the exact order that they are specified on the command line.                                                                     |
|              | If no command is specified on the command line, <code>--create</code> is used by default.                                                                                                                                                                   |



This option is not available in the IDE.

**--delete, -d**

|            |                                                                                                                                                                |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax     | <code>--delete libraryfile objectfile1 ... objectfileN</code><br><code>-d libraryfile objectfile1 ... objectfileN</code>                                       |
| Parameters | <p><i>libraryfile</i>      The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i>, page 232.</p> |

*objectfile1* ... The object file(s) that the command operates on.  
*objectfileN*

For use with `iarchive`

Description Use this command to remove object files (modules) from an existing library. All object files that are specified on the command line will be removed from the library.



This option is not available in the IDE.

## --edit

Syntax `--edit steering_file`

For use with `isymexport`

Description Use this option to specify a steering file to control which symbols that are included in the `isymexport` output file, and also to rename some of the symbols if that is desired.

See also *Steering files*, page 457.



This option is not available in the IDE.

## --extract, -x

Syntax `--extract libraryfile [objectfile1 ... objectfileN]`  
`-x libraryfile [objectfile1 ... objectfileN]`

Parameters *libraryfile* The library file that the command operates on. See *Rules for specifying a filename or directory as parameters*, page 232.

*objectfile1* ... The object file(s) that the command operates on.  
*objectfileN*

For use with `iarchive`

Description Use this command to extract object files (modules) from an existing library. If a list of object files is specified, only these files are extracted. If a list of object files is not specified, all object files in the library are extracted.



This option is not available in the IDE.

## **-f**

|              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>-f filename</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Parameters   | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| For use with | <code>iarchive</code> , <code>ielfdumparm</code> , <code>iobjmanip</code> , and <code>isymexport</code> .                                                                                                                                                                                                                                                                                                                                                                                                                |
| Description  | <p>Use this option to make the tool read command line options from the named file, with the default filename extension <code>.xcl</code>.</p> <p>In the command file, you format the items exactly as if they were on the command line itself, except that you can use multiple lines, because the newline character acts just as a space or tab character.</p> <p>Both C and C++ style comments are allowed in the file. Double quotes behave in the same way as in the Microsoft Windows command line environment.</p> |



This option is not available in the IDE.

## **--fill**

|            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax     | <code>--fill [v;]pattern;range[;range...]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Parameters | <p><code>v</code> Generates virtual fill for the fill command. Virtual fill is filler bytes that are included in checksumming, but that are not included in the output file. The primary use for this is certain types of hardware where bytes that are not specified by the image have a known value (typically, <code>0xFF</code> or <code>0x0</code>).</p> <p><code>pattern</code> A hexadecimal string with the <code>0x</code> prefix (for example, <code>0xEF</code>) interpreted as a sequence of bytes, where each pair of digits corresponds to one byte (for example <code>0x123456</code>, for the sequence of bytes <code>0x12</code>, <code>0x34</code>, and <code>0x56</code>). This sequence is repeated over the fill area. If the length of the fill pattern is greater than 1 byte, it is repeated as if it started at address 0.</p> |

*range* Specifies the address range for the fill. Hexadecimal and decimal notation is allowed (for example, 0x8002-0x8FFF). Note that each address must be 4-byte aligned.

For use with

ielftool

Description

Use this option to fill all gaps in one or more ranges with a pattern, which can be either an expression or a hexadecimal string. The contents will be calculated as if the fill pattern was repeatedly filled from the start address until the end address is passed, and then the real contents will overwrite that pattern.

If the `--fill` option is used more than once on the command line, the fill ranges cannot overlap each other.



To set related options, choose:

**Project>Options>Linker>Checksum**

## --ihex

Syntax

--ihex

For use with

ielftool

Description

Sets the format of the output file to linear Intel hex.



To set related options, choose:

**Project>Options>Linker>Output converter**

## --no\_strtab

Syntax

--no\_strtab

For use with

ielfdumparm

Description

Use this option to suppress dumping of string table sections (sections of type SHT\_STRTAB).



This option is not available in the IDE.

## --output, -o


|              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>-o {filename directory}</code><br><code>--output {filename directory}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Parameters   | See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| For use with | <code>iarchive</code> and <code>ielfdumparm</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description  | <p><code>iarchive</code></p> <p>By default, <code>iarchive</code> assumes that the first argument after the <code>iarchive</code> command is the name of the destination library. Use this option to explicitly specify a different filename for the library.</p> <p><code>ielfdumparm</code></p> <p>By default, output from the dumper is directed to the console. Use this option to direct the output to a file instead. The default name of the output file is the name of the input file with an added <code>id</code> filename extension</p> <p>You can also specify the output file by specifying a file or directory following the name of the input file.</p> |



This option is not available in the IDE.

## --parity

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |                                                                                                                                    |                     |                                         |                      |                                                               |                   |                                                                                                                                                                                         |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------|----------------------|---------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax               | <code>--parity{symbol[+offset]   address}:size, algo:flashbase[:flags]; range[:range...]</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                     |                                                                                                                                    |                     |                                         |                      |                                                               |                   |                                                                                                                                                                                         |
| Parameters           | <table> <tr> <td><code>symbol</code></td> <td>The name of the symbol where the parity bytes should be stored. Note that it must exist in the symbol table in the input ELF file.</td> </tr> <tr> <td><code>offset</code></td> <td>An offset to the symbol. By default, 0.</td> </tr> <tr> <td><code>address</code></td> <td>The absolute address where the parity bytes should be stored.</td> </tr> <tr> <td><code>size</code></td> <td>The maximum number of bytes that the parity generation can use. An error will be issued if this value is exceeded. Note that the size must fit in the specified symbol in the ELF file.</td> </tr> </table> | <code>symbol</code> | The name of the symbol where the parity bytes should be stored. Note that it must exist in the symbol table in the input ELF file. | <code>offset</code> | An offset to the symbol. By default, 0. | <code>address</code> | The absolute address where the parity bytes should be stored. | <code>size</code> | The maximum number of bytes that the parity generation can use. An error will be issued if this value is exceeded. Note that the size must fit in the specified symbol in the ELF file. |
| <code>symbol</code>  | The name of the symbol where the parity bytes should be stored. Note that it must exist in the symbol table in the input ELF file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                                                                                                                                    |                     |                                         |                      |                                                               |                   |                                                                                                                                                                                         |
| <code>offset</code>  | An offset to the symbol. By default, 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |                                                                                                                                    |                     |                                         |                      |                                                               |                   |                                                                                                                                                                                         |
| <code>address</code> | The absolute address where the parity bytes should be stored.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                     |                                                                                                                                    |                     |                                         |                      |                                                               |                   |                                                                                                                                                                                         |
| <code>size</code>    | The maximum number of bytes that the parity generation can use. An error will be issued if this value is exceeded. Note that the size must fit in the specified symbol in the ELF file.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                     |                                                                                                                                    |                     |                                         |                      |                                                               |                   |                                                                                                                                                                                         |

|              |                                                                                     |                                                                                                                                                                                                                                                                                        |
|--------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | <i>algo</i>                                                                         | Choose between:<br><br>odd, uses odd parity.<br>even, uses even parity.                                                                                                                                                                                                                |
|              | <i>flashbase</i>                                                                    | The start address of the flash memory. Parity bits will not be generated for the addresses between <i>flashbase</i> and the start address of the range. If <i>flashbase</i> and the start address of the range coincide, parity bits will be generated for all addresses               |
|              | <i>flags</i>                                                                        | Choose between:<br><br>r, reverses the byte order within each word.<br>L, processes 4 bytes at a time.<br>W, processes 2 bytes at a time.<br>B, processes 1 byte at a time.                                                                                                            |
|              | <i>range</i>                                                                        | The address range over which the parity bytes should be generated. Hexadecimal and decimal notation are allowed (for example, 0x8002–0x8FFF).                                                                                                                                          |
| For use with | <i>ielftool</i>                                                                     |                                                                                                                                                                                                                                                                                        |
| Description  |                                                                                     | Use this option to generate parity bytes over specified ranges. The range is traversed left to the right and the parity bits are generated using the odd or even algorithm. The parity bits are finally stored in the specified symbol where they can be accessed by your application. |
|              |  | This option is not available in the IDE.                                                                                                                                                                                                                                               |

## **--ram\_reserve\_ranges**

|              |                                                    |                                                                                                                                                                                                                                                          |
|--------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--ram_reserve_ranges [=symbol_prefix]</code> |                                                                                                                                                                                                                                                          |
| Parameters   | <i>symbol_prefix</i>                               | The prefix of symbols created by this option.                                                                                                                                                                                                            |
| For use with | <i>isymexport</i>                                  |                                                                                                                                                                                                                                                          |
| Description  |                                                    | Use this option to generate symbols for the areas in RAM that the image uses. One symbol will be generated for each such area. The name of each symbol is based on the name of the area and is prefixed by the optional parameter <i>symbol_prefix</i> . |

Generating symbols that cover an area in this way prevents the linker from placing other content at the affected addresses. This can be useful when linking against an existing image.

If `--ram_reserve_ranges` is used together with `--reserve_ranges`, the RAM areas will get their prefix from the `--ram_reserve_ranges` option and the non-RAM areas will get their prefix from the `--reserve_ranges` option.

See also

`--reserve_ranges`, page 473.



This option is not available in the IDE.

## **--raw**

Syntax `--raw`

For use with `ielfdumparm`

Description By default, many ELF sections will be dumped using a text format specific to a particular kind of section. Use this option to dump each selected ELF section using the generic text format.

The generic text format dumps each byte in the section in hexadecimal format, and where appropriate, as ASCII text.



This option is not available in the IDE.

## **--remove\_file\_path**

Syntax `--remove_file_path`

For use with `iobjmanip`


Description Use this option to make `iobjmanip` remove information about the directory structure of the project source tree from the generated object file, which means that the file symbol in the ELF object file is modified.

This option must be used in combination with `--remove_section ".comment"`.




This option is not available in the IDE.

## --remove\_section

|              |                                                                                                            |                                                                                                                                       |
|--------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--remove_section {<i>section</i> <i>number</i>}</code>                                               |                                                                                                                                       |
| Parameters   | <i>section</i>                                                                                             | The section—or sections, if there are more than one section with the same name—to be removed.                                         |
|              | <i>number</i>                                                                                              | The number of the section to be removed. Section numbers can be obtained from an object dump created using <code>ielfdumparm</code> . |
| For use with | <code>iobjmanip</code>                                                                                     |                                                                                                                                       |
| Description  | Use this option to make <code>iobjmanip</code> omit the specified section when generating the output file. |                                                                                                                                       |
|              |                           | This option is not available in the IDE.                                                                                              |


## --rename\_section

|              |                                                                                                              |                                                                                                                                       |
|--------------|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--rename_section {<i>oldname</i> <i>oldnumber</i>}=<i>newname</i></code>                               |                                                                                                                                       |
| Parameters   | <i>oldname</i>                                                                                               | The section—or sections, if there are more than one section with the same name—to be renamed.                                         |
|              | <i>oldnumber</i>                                                                                             | The number of the section to be renamed. Section numbers can be obtained from an object dump created using <code>ielfdumparm</code> . |
|              | <i>newname</i>                                                                                               | The new name of the section.                                                                                                          |
| For use with | <code>iobjmanip</code>                                                                                       |                                                                                                                                       |
| Description  | Use this option to make <code>iobjmanip</code> rename the specified section when generating the output file. |                                                                                                                                       |
|              |                           | This option is not available in the IDE.                                                                                              |


## --rename\_symbol

|        |                                                             |
|--------|-------------------------------------------------------------|
| Syntax | <code>--rename_symbol <i>oldname</i> =<i>newname</i></code> |
|--------|-------------------------------------------------------------|



|              |                                                                                                             |                                          |
|--------------|-------------------------------------------------------------------------------------------------------------|------------------------------------------|
| Parameters   | <i>oldname</i>                                                                                              | The symbol to be renamed.                |
|              | <i>newname</i>                                                                                              | The new name of the symbol.              |
| For use with | <code>iobjmanip</code>                                                                                      |                                          |
| Description  | Use this option to make <code>iobjmanip</code> rename the specified symbol when generating the output file. |                                          |
|              |                            | This option is not available in the IDE. |

## **--replace, -r**

|              |                                                                                                                                                                                                                                                   |                                                                                                                                  |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--replace libraryfile objectfile1 ... objectfileN</code><br><code>-r libraryfile objectfile1 ... objectfileN</code>                                                                                                                         |                                                                                                                                  |
| Parameters   | <i>libraryfile</i>                                                                                                                                                                                                                                | The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i> , page 232. |
|              | <i>objectfile1 ... objectfileN</i>                                                                                                                                                                                                                | The object file(s) that the command operates on.                                                                                 |
| For use with | <code>iarchive</code>                                                                                                                                                                                                                             |                                                                                                                                  |
| Description  | Use this command to replace or add object files (modules) to an existing library. The object files specified on the command line either replace existing object files in the library (if they have the same name) or are appended to the library. |                                                                                                                                  |
|              |                                                                                                                                                                | This option is not available in the IDE.                                                                                         |

## **--reserve\_ranges**

|              |                                                      |                                               |
|--------------|------------------------------------------------------|-----------------------------------------------|
| Syntax       | <code>--reserve_ranges[=<i>symbol_prefix</i>]</code> |                                               |
| Parameters   | <i>symbol_prefix</i>                                 | The prefix of symbols created by this option. |
| For use with | <code>isymexport</code>                              |                                               |

**Description**

Use this option to generate symbols for the areas in ROM and RAM that the image uses. One symbol will be generated for each such area. The name of each symbol is based on the name of the area and is prefixed by the optional parameter *symbol\_prefix*.

Generating symbols that cover an area in this way prevents the linker from placing other content at the affected addresses. This can be useful when linking against an existing image.

If `--reserve_ranges` is used together with `--ram_reserve_ranges`, the RAM areas will get their prefix from the `--ram_reserve_ranges` option and the non-RAM areas will get their prefix from the `--reserve_ranges` option.

**See also**

`--ram_reserve_ranges`, page 470.



This option is not available in the IDE.

## **--section, -s**

**Syntax**

```
--section section_number|section_name[,...]
--s section_number|section_name[,...]
```

**Parameters**

*section\_number*    The number of the section to be dumped.

*section\_name*      The name of the section to be dumped.

**For use with**

`iefldumparm`

**Description**

Use this option to dump the contents of a section with the specified number, or any section with the specified name. If a relocation section is associated with a selected section, its contents are output as well.

If you use this option, the general properties of the input file will not be included in the output.

You can specify multiple section numbers or names by separating them with commas, or by using this option more than once.

By default, no section contents are included in the output.

**Example**

```
-s 3,17                                    /* Sections #3 and #17
-s .debug_frame,42                       /* Any sections named .debug_frame and
   also section #42 */
```



This option is not available in the IDE.

## --self\_reloc

Syntax `--self_reloc`

For use with `ielftool`

Description This option is intentionally not documented as it is not intended for general use.



This option is not available in the IDE.

## --silent

Syntax `--silent`  
`-S (iarchive only)`

For use with `iarchive` and `ielftool`.

Description Causes the tool to operate without sending any messages to the standard output stream. By default, `ielftool` sends various messages via the standard output stream. You can use this option to prevent this. `ielftool` sends error and warning messages to the error output stream, so they are displayed regardless of this setting.



This option is not available in the IDE.

## --simple

Syntax `--simple`

For use with `ielftool`

Description Sets the format of the output file to Simple code.



To set related options, choose:

**Project>Options>Output converter**

## --simple-ne

Syntax `--simple-ne`

For use with `ielftool`

Description Sets the format of the output file to Simple code, but no entry record is generated.



To set related options, choose:

**Project>Options>Output converter**

## --srec

Syntax `--srec`

For use with `ielftool`

Description Sets the format of the output file to Motorola S-records.



To set related options, choose:

**Project>Options>Output converter**

## --srec-len

Syntax `--srec-len=length`

Parameters `length` The number of data bytes in each S-record.

For use with `ielftool`

Description Restricts the number of data bytes in each S-record. This option can be used in combination with the `--srec` option.



This option is not available in the IDE.

## --srec-s3only

Syntax `--srec-s3only`

|              |                                                                                                                                                                               |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| For use with | <code>ielftool</code>                                                                                                                                                         |
| Description  | Restricts the S-record output to contain only a subset of records, that is S0, S3 and S7 records. This option can be used in combination with the <code>--srec</code> option. |



This option is not available in the IDE.

## --strip

|              |                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--strip</code>                                                                                   |
| For use with | <code>iobjmanip</code> and <code>ielftool</code> .                                                     |
| Description  | Use this option to remove all sections containing debug information before the output file is written. |

Note that `ielftool` needs an unstripped input ELF image. If you use the `--strip` option in the linker, remove it and use the `--strip` option in `ielftool` instead.



To set related options, choose:

**Project>Options>Linker>Output>Include debug information in output**

## --symbols

|              |                                                                                                                                                                                          |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Syntax       | <code>--symbols <i>libraryfile</i></code>                                                                                                                                                |
| Parameters   | <i>libraryfile</i> The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i> , page 232.                                      |
| For use with | <code>iarchive</code>                                                                                                                                                                    |
| Description  | Use this command to list all external symbols that are defined by any object file (module) in the specified library, together with the name of the object file (module) that defines it. |

In silent mode (`--silent`), this command performs symbol table-related syntax checks on the library file and displays only errors and warnings.



This option is not available in the IDE.

## --titxt

|              |                                               |
|--------------|-----------------------------------------------|
| Syntax       | --titxt                                       |
| For use with | ielftool                                      |
| Description  | Sets the format of the output file to TI-txt. |



To set related options, choose:

**Project>Options>Output converter**

## --toc, -t

|        |                                                   |
|--------|---------------------------------------------------|
| Syntax | --toc <i>libraryfile</i><br>-t <i>libraryfile</i> |
|--------|---------------------------------------------------|

|            |                    |                                                                                                                                  |
|------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Parameters | <i>libraryfile</i> | The library file that the command operates on. See <i>Rules for specifying a filename or directory as parameters</i> , page 232. |
|------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------|

|              |          |
|--------------|----------|
| For use with | iarchive |
|--------------|----------|

|             |                                                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Use this command to list the names of all object files (modules) in a specified library.<br>In silent mode ( <code>--silent</code> ), this command performs basic syntax checks on the library file, and displays only errors and warnings. |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



This option is not available in the IDE.

## --verbose, -V

|        |                                 |
|--------|---------------------------------|
| Syntax | --verbose<br>-V (iarchive only) |
|--------|---------------------------------|

|              |                        |
|--------------|------------------------|
| For use with | iarchive and ielftool. |
|--------------|------------------------|

|             |                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------|
| Description | Use this option to make the tool report which operations it performs, in addition to giving diagnostic messages. |
|-------------|------------------------------------------------------------------------------------------------------------------|



This option is not available in the IDE because this setting is always enabled.

# Implementation-defined behavior for Standard C

- Descriptions of implementation-defined behavior

If you are using C89 instead of Standard C, see *Implementation-defined behavior for C89*, page 495. For a short overview of the differences between Standard C and C89, see *C language overview*, page 165.

---

## Descriptions of implementation-defined behavior

This section follows the same order as the C standard. Each item includes references to the ISO chapter and section (in parenthesis) that explains the implementation-defined behavior.

**Note:** The IAR Systems implementation adheres to a freestanding implementation of Standard C. This means that parts of a standard library can be excluded in the implementation.

### J.3.1 TRANSLATION

#### Diagnostics (3.10, 5.1.1.3)

Diagnostics are produced in the form:

```
filename, linenumber level[tag): message
```

where *filename* is the name of the source file in which the error was encountered, *linenumber* is the line number at which the compiler detected the error, *level* is the level of seriousness of the message (remark, warning, error, or fatal error), *tag* is a unique tag that identifies the message, and *message* is an explanatory message, possibly several lines.

#### White-space characters (5.1.1.2)

At translation phase three, each non-empty sequence of white-space characters is retained.

## J.3.2 ENVIRONMENT

### The character set (5.1.1.2)

The source character set is the same as the physical source file multibyte character set. By default, the standard ASCII character set is used. However, if you use the `--enable_multibytes` compiler option, the host character set is used instead.

### Main (5.1.2.1)

The function called at program startup is called `main`. No prototype is declared for `main`, and the only definition supported for `main` is:

```
int main(void)
```

To change this behavior, see *Customizing system initialization*, page 120.

### The effect of program termination (5.1.2.1)

Terminating the application returns the execution to the startup code (just after the call to `main`).

### Alternative ways to define main (5.1.2.2.1)

There is no alternative ways to define the `main` function.

### The argv argument to main (5.1.2.2.1)

The `argv` argument is not supported.

### Streams as interactive devices (5.1.2.3)

The streams `stdin`, `stdout`, and `stderr` are treated as interactive devices.

## Signals, their semantics, and the default handling (7.14)

In the DLIB library, the set of supported signals is the same as in Standard C. A raised signal will do nothing, unless the `signal` function is customized to fit the application.

### Signal values for computational exceptions (7.14.1.1)

In the DLIB library, there are no implementation-defined values that correspond to a computational exception.

### Signals at system startup (7.14.1.1)

In the DLIB library, there are no implementation-defined signals that are executed at system startup.



### **Environment names (7.20.4.5)**

In the DLIB library, there are no implementation-defined environment names that are used by the `getenv` function.

### **The system function (7.20.4.6)**

The `system` function is not supported.

## **J.3.3 IDENTIFIERS**

### **Multibyte characters in identifiers (6.4.2)**

Additional multibyte characters may not appear in identifiers.

### **Significant characters in identifiers (5.2.4.1, 6.1.2)**

The number of significant initial characters in an identifier with or without external linkage is guaranteed to be no less than 200.

## **J.3.4 CHARACTERS**

### **Number of bits in a byte (3.6)**

A byte contains 8 bits.

### **Execution character set member values (5.2.1)**

The values of the members of the execution character set are the values of the ASCII character set, which can be augmented by the values of the extra characters in the host character set.

### **Alphabetic escape sequences (5.2.2)**

The standard alphabetic escape sequences have the values `\a-7`, `\b-8`, `\f-12`, `\n-10`, `\r-13`, `\t-9`, and `\v-11`.

### **Characters outside of the basic executive character set (6.2.5)**

A character outside of the basic executive character set that is stored in a `char` is not transformed.

### **Plain char (6.2.5, 6.3.1.1)**

A plain `char` is treated as an `unsigned char`.

**Source and execution character sets (6.4.4.4, 5.1.1.2)**

The source character set is the set of legal characters that can appear in source files. By default, the source character set is the standard ASCII character set. However, if you use the command line option `--enable_multibytes`, the source character set will be the host computer's default character set.

The execution character set is the set of legal characters that can appear in the execution environment. By default, the execution character set is the standard ASCII character set.

However, if you use the command line option `--enable_multibytes`, the execution character set will be the host computer's default character set. The IAR DLIB Library needs a multibyte character scanner to support a multibyte execution character set. See *Locale*, page 126.

**Integer character constants with more than one character (6.4.4.4)**

An integer character constant that contains more than one character will be treated as an integer constant. The value will be calculated by treating the leftmost character as the most significant character, and the rightmost character as the least significant character, in an integer constant. A diagnostic message will be issued if the value cannot be represented in an integer constant.

**Wide character constants with more than one character (6.4.4.4)**

A wide character constant that contains more than one multibyte character generates a diagnostic message.

**Locale used for wide character constants (6.4.4.4)**

By default, the C locale is used. If the `--enable_multibytes` compiler option is used, the default host locale is used instead.

**Locale used for wide string literals (6.4.5)**

By default, the C locale is used. If the `--enable_multibytes` compiler option is used, the default host locale is used instead.

**Source characters as executive characters (6.4.5)**

All source characters can be represented as executive characters.

**J.3.5 INTEGERS****Extended integer types (6.2.5)**

There are no extended integer types.

### **Range of integer values (6.2.6.2)**

The representation of integer values are in the two's complement form. The most significant bit holds the sign; 1 for negative, 0 for positive and zero.

For information about the ranges for the different integer types, see *Basic data types—integer types*, page 307.

### **The rank of extended integer types (6.3.1.1)**

There are no extended integer types.

### **Signals when converting to a signed integer type (6.3.1.3)**

No signal is raised when an integer is converted to a signed integer type.

### **Signed bitwise operations (6.5)**

Bitwise operations on signed integers work the same way as bitwise operations on unsigned integers; in other words, the sign-bit will be treated as any other bit.

## **J.3.6 FLOATING POINT**

### **Accuracy of floating-point operations (5.2.4.2.2)**

The accuracy of floating-point operations is unknown.

### **Rounding behaviors (5.2.4.2.2)**

There are no non-standard values of `FLT_ROUNDS`.

### **Evaluation methods (5.2.4.2.2)**

There are no non-standard values of `FLT_EVAL_METHOD`.

### **Converting integer values to floating-point values (6.3.1.4)**

When an integral value is converted to a floating-point value that cannot exactly represent the source value, the round-to-nearest rounding mode is used (`FLT_ROUNDS` is defined to 1).

### **Converting floating-point values to floating-point values (6.3.1.5)**

When a floating-point value is converted to a floating-point value that cannot exactly represent the source value, the round-to-nearest rounding mode is used (`FLT_ROUNDS` is defined to 1).

### **Denoting the value of floating-point constants (6.4.4.2)**

The round-to-nearest rounding mode is used (`FLT_ROUNDS` is defined to 1).

### **Contraction of floating-point values (6.5)**

Floating-point values are contracted. However, there is no loss in precision and because signaling is not supported, this does not matter.

### **Default state of `FENV_ACCESS` (7.6.1)**

The default state of the pragma directive `FENV_ACCESS` is `OFF`.

### **Additional floating-point mechanisms (7.6, 7.12)**

There are no additional floating-point exceptions, rounding-modes, environments, and classifications.

### **Default state of `FP_CONTRACT` (7.12.2)**

The default state of the pragma directive `FP_CONTRACT` is `OFF`.

## **J.3.7 ARRAYS AND POINTERS**

### **Conversion from/to pointers (6.3.2.3)**

For information about casting of data pointers and function pointers, see *Casting*, page 314.

### **`ptrdiff_t` (6.5.6)**

For information about `ptrdiff_t`, see *ptrdiff\_t*, page 314.

## **J.3.8 HINTS**

### **Honoring the register keyword (6.7.1)**

User requests for register variables are not honored.

### **Inlining functions (6.7.4)**

User requests for inlining functions increases the chance, but does not make it certain, that the function will actually be inlined into another function. See *Inlining functions*, page 71.

## J.3.9 STRUCTURES, UNIONS, ENUMERATIONS, AND BITFIELDS

### Sign of 'plain' bitfields (6.7.2, 6.7.2.1)

For information about how a 'plain' `int` bitfield is treated, see *Bitfields*, page 308.

### Possible types for bitfields (6.7.2.1)

All integer types can be used as bitfields in the compiler's extended mode, see *-e*, page 247.

### Bitfields straddling a storage-unit boundary (6.7.2.1)

A bitfield is always placed in one—and one only—storage unit, which means that the bitfield cannot straddle a storage-unit boundary.

### Allocation order of bitfields within a unit (6.7.2.1)

For information about how bitfields are allocated within a storage unit, see *Bitfields*, page 308.

### Alignment of non-bitfield structure members (6.7.2.1)

The alignment of non-bitfield members of structures is the same as for the member types, see *Alignment*, page 305.

### Integer type used for representing enumeration types (6.7.2.2)

The chosen integer type for a specific enumeration type depends on the enumeration constants defined for the enumeration type. The chosen integer type is the smallest possible.

## J.3.10 QUALIFIERS

### Access to volatile objects (6.7.3)

Any reference to an object with `volatile` qualified type is an access, see *Declaring objects volatile*, page 317.

## J.3.11 PREPROCESSING DIRECTIVES

### Mapping of header names (6.4.7)

Sequences in header names are mapped to source file names verbatim. A backslash `\` is not treated as an escape sequence. See *Overview of the preprocessor*, page 391.

**Character constants in constant expressions (6.10.1)**

A character constant in a constant expression that controls conditional inclusion matches the value of the same character constant in the execution character set.

**The value of a single-character constant (6.10.1)**

A single-character constant may only have a negative value if a plain character (`char`) is treated as a signed character, see `--char_is_signed`, page 240.

**Including bracketed filenames (6.10.2)**

For information about the search algorithm used for file specifications in angle brackets `<>`, see *Include file search procedure*, page 223.

**Including quoted filenames (6.10.2)**

For information about the search algorithm used for file specifications enclosed in quotes, see *Include file search procedure*, page 223.

**Preprocessing tokens in #include directives (6.10.2)**

Preprocessing tokens in an `#include` directive are combined in the same way as outside an `#include` directive.

**Nesting limits for #include directives (6.10.2)**

There is no explicit nesting limit for `#include` processing.

**Universal character names (6.10.3.2)**

Universal character names (UCN) are not supported.

**Recognized pragma directives (6.10.6)**

In addition to the pragma directives described in the chapter *Pragma directives*, the following directives are recognized and will have an indeterminate effect. If a pragma directive is listed both in the chapter *Pragma directives* and here, the information provided in the chapter *Pragma directives* overrides the information here.

```
alignment
baseaddr
basic_template_matching
building_runtime
can_instantiate
```

codeseg  
constseg  
cspy\_support  
dataseg  
define\_type\_info  
do\_not\_instantiate  
early\_dynamic\_initialization  
function  
function\_effects  
hdrstop  
important\_typedef  
instantiate  
keep\_definition  
library\_default\_requirements  
library\_provides  
library\_requirement\_override  
memory  
module\_name  
no\_pch  
once  
system\_include  
vector  
warnings

### **Default `__DATE__` and `__TIME__` (6.10.8)**

The definitions for `__TIME__` and `__DATE__` are always available.

## J.3.12 LIBRARY FUNCTIONS

### Additional library facilities (5.1.2.1)

Most of the standard library facilities are supported. Some of them—the ones that need an operating system—require a low-level implementation in the application. For more information, see *The DLIB runtime environment*, page 103.

### Diagnostic printed by the assert function (7.2.1.1)

The `assert()` function prints:

```
filename:linenr expression -- assertion failed
```

when the parameter evaluates to zero.

### Representation of the floating-point status flags (7.6.2.2)

For information about the floating-point status flags, see *fcntl.h*, page 405.

### Feraiseexcept raising floating-point exception (7.6.2.3)

For information about the `feraiseexcept` function raising floating-point exceptions, see *Floating-point environment*, page 312.

### Strings passed to the setlocale function (7.11.1.1)

For information about strings passed to the `setlocale` function, see *Locale*, page 126.

### Types defined for float\_t and double\_t (7.12)

The `FLT_EVAL_METHOD` macro can only have the value 0.

### Domain errors (7.12.1)

No function generates other domain errors than what the standard requires.

### Return values on domain errors (7.12.1)

Mathematic functions return a floating-point NaN (not a number) for domain errors.

### Underflow errors (7.12.1)

Mathematic functions set `errno` to the macro `ERANGE` (a macro in `errno.h`) and return zero for underflow errors.

### fmod return value (7.12.10.1)

The `fmod` function returns a floating-point NaN when the second argument is zero.



**The magnitude of `remquo` (7.12.10.3)**

The magnitude is congruent modulo `INT_MAX`.

**`signal()` (7.14.1.1)**

The `signal` part of the library is not supported.

**Note:** Low-level interface functions exist in the library, but will not perform anything. Use the template source code to implement application-specific signal handling. See *Signal and raise*, page 130.

**NULL macro (7.17)**

The `NULL` macro is defined to 0.

**Terminating newline character (7.19.2)**

`stdout` stream functions recognize either `newline` or end of file (EOF) as the terminating character for a line.

**Space characters before a newline character (7.19.2)**

Space characters written to a stream immediately before a newline character are preserved.

**Null characters appended to data written to binary streams (7.19.2)**

No null characters are appended to data written to binary streams.

**File position in append mode (7.19.3)**

The file position is initially placed at the beginning of the file when it is opened in `append-mode`.

**Truncation of files (7.19.3)**

Whether a write operation on a text stream causes the associated file to be truncated beyond that point, depends on the application-specific implementation of the low-level file routines. See *File input and output*, page 126.

**File buffering (7.19.3)**

An open file can be either block-buffered, line-buffered, or unbuffered.

**A zero-length file (7.19.3)**

Whether a zero-length file exists depends on the application-specific implementation of the low-level file routines.

**Legal file names (7.19.3)**

The legality of a filename depends on the application-specific implementation of the low-level file routines.

**Number of times a file can be opened (7.19.3)**

Whether a file can be opened more than once depends on the application-specific implementation of the low-level file routines.

**Multibyte characters in a file (7.19.3)**

The encoding of multibyte characters in a file depends on the application-specific implementation of the low-level file routines.

**remove() (7.19.4.1)**

The effect of a remove operation on an open file depends on the application-specific implementation of the low-level file routines. See *File input and output*, page 126.

**rename() (7.19.4.2)**

The effect of renaming a file to an already existing filename depends on the application-specific implementation of the low-level file routines. See *File input and output*, page 126.

**Removal of open temporary files (7.19.4.3)**

Whether an open temporary file is removed depends on the application-specific implementation of the low-level file routines.

**Mode changing (7.19.5.4)**

`freopen` closes the named stream, then reopens it in the new mode. The streams `stdin`, `stdout`, and `stderr` can be reopened in any new mode.

**Style for printing infinity or NaN (7.19.6.1, 7.24.2.1)**

The style used for printing infinity or NaN for a floating-point constant is `inf` and `nan` (`INF` and `NAN` for the `F` conversion specifier), respectively. The `n-char-sequence` is not used for `nan`.

**%p in printf() (7.19.6.1, 7.24.2.1)**

The argument to a `%p` conversion specifier, print pointer, to `printf()` is treated as having the type `void *`. The value will be printed as a hexadecimal number, similar to using the `%x` conversion specifier.

**Reading ranges in scanf (7.19.6.2, 7.24.2.1)**

A - (dash) character is always treated as a range symbol.

**%p in scanf (7.19.6.2, 7.24.2.2)**

The `%p` conversion specifier, scan pointer, to `scanf()` reads a hexadecimal number and converts it into a value with the type `void *`.

**File position errors (7.19.9.1, 7.19.9.3, 7.19.9.4)**

On file position errors, the functions `fgetpos`, `ftell`, and `fsetpos` store `EFPOS` in `errno`.

**An n-char-sequence after nan (7.20.1.3, 7.24.4.1.1)**

An n-char-sequence after a NaN is read and ignored.

**errno value at underflow (7.20.1.3, 7.24.4.1.1)**

`errno` is set to `ERANGE` if an underflow is encountered.

**Zero-sized heap objects (7.20.3)**

A request for a zero-sized heap object will return a valid pointer and not a null pointer.

**Behavior of abort and exit (7.20.4.1, 7.20.4.4)**

A call to `abort()` or `_Exit()` will not flush stream buffers, not close open streams, and not remove temporary files.

**Termination status (7.20.4.1, 7.20.4.3, 7.20.4.4)**

The termination status will be propagated to `__exit()` as a parameter. `exit()` and `_Exit()` use the input parameter, whereas `abort` uses `EXIT_FAILURE`.

**The system function return value (7.20.4.6)**

The `system` function is not supported.

**The time zone (7.23.1)**

The local time zone and daylight savings time must be defined by the application. For more information, see *Time*, page 130.

**Range and precision of time (7.23)**

For information about range and precision, see *time.h*, page 406. The application must supply the actual implementation for the functions `time` and `clock`. See *Time*, page 130.

**clock() (7.23.2.1)**

The application must supply an implementation of the `clock` function. See *Time*, page 130.

**%Z replacement string (7.23.3.5, 7.24.5.1)**

By default, ":" is used as a replacement for %Z. Your application should implement the time zone handling. See *Time*, page 130.

**Math functions rounding mode (F.9)**

The functions in `math.h` honor the rounding direction mode in `FLT-ROUNDS`.

**J.3.13 ARCHITECTURE****Values and expressions assigned to some macros (5.2.4.2, 7.18.2, 7.18.3)**

There are always 8 bits in a byte.

`MB_LEN_MAX` is at the most 6 bytes depending on the library configuration that is used.

For information about sizes, ranges, etc for all basic types, see *Data representation*, page 305.

The limit macros for the exact-width, minimum-width, and fastest minimum-width integer types defined in `stdint.h` have the same ranges as `char`, `short`, `int`, `long`, and `long long`.

The floating-point constant `FLT_ROUNDS` has the value 1 (to nearest) and the floating-point constant `FLT_EVAL_METHOD` has the value 0 (treat as is).

**The number, order, and encoding of bytes (6.2.6.1)**

See *Data representation*, page 305.

**The value of the result of the sizeof operator (6.5.3.4)**

See *Data representation*, page 305.

**J.4 LOCALE****Members of the source and execution character set (5.2.1)**

By default, the compiler accepts all one-byte characters in the host's default character set. If the compiler option `--enable_multibytes` is used, the host multibyte characters are accepted in comments and string literals as well.

**The meaning of the additional character set (5.2.1.2)**

Any multibyte characters in the extended source character set is translated verbatim into the extended execution character set. It is up to your application with the support of the library configuration to handle the characters correctly.

**Shift states for encoding multibyte characters (5.2.1.2)**

Using the compiler option `--enable_multibytes` enables the use of the host's default multibyte characters as extended source characters.

**Direction of successive printing characters (5.2.2)**

The application defines the characteristics of a display device.

**The decimal point character (7.1.1)**

The default decimal-point character is a '.'. You can redefine it by defining the library configuration symbol `_LOCALE_DECIMAL_POINT`.

**Printing characters (7.4, 7.25.2)**

The set of printing characters is determined by the chosen locale.

**Control characters (7.4, 7.25.2)**

The set of control characters is determined by the chosen locale.

**Characters tested for (7.4.1.2, 7.4.1.3, 7.4.1.7, 7.4.1.9, 7.4.1.10, 7.4.1.11, 7.25.2.1.2, 7.25.5.1.3, 7.25.2.1.7, 7.25.2.1.9, 7.25.2.1.10, 7.25.2.1.11)**

The sets of characters tested are determined by the chosen locale.

### The native environment (7.1.1.1)

The native environment is the same as the "C" locale.

### Subject sequences for numeric conversion functions (7.20.1, 7.24.4.1)

There are no additional subject sequences that can be accepted by the numeric conversion functions.

### The collation of the execution character set (7.21.4.3, 7.24.4.4.2)

The collation of the execution character set is determined by the chosen locale.

### Message returned by strerror (7.21.6.2)

The messages returned by the `strerror` function depending on the argument is:

| Argument   | Message                   |
|------------|---------------------------|
| EZERO      | no error                  |
| EDOM       | domain error              |
| ERANGE     | range error               |
| EFPOS      | file positioning error    |
| EILSEQ     | multi-byte encoding error |
| <0    >99  | unknown error             |
| all others | error <i>nnn</i>          |

Table 54: Message returned by `strerror()`—IAR DLIB library

# Implementation-defined behavior for C89

- Descriptions of implementation-defined behavior

If you are using Standard C instead of C89, see *Implementation-defined behavior for Standard C*, page 479. For a short overview of the differences between Standard C and C89, see *C language overview*, page 165.

---

## Descriptions of implementation-defined behavior

The descriptions follow the same order as the ISO appendix. Each item covered includes references to the ISO chapter and section (in parenthesis) that explains the implementation-defined behavior.

### TRANSLATION

#### Diagnostics (5.1.1.3)

Diagnostics are produced in the form:

```
filename, linenumber level[tag]: message
```

where *filename* is the name of the source file in which the error was encountered, *linenumber* is the line number at which the compiler detected the error, *level* is the level of seriousness of the message (remark, warning, error, or fatal error), *tag* is a unique tag that identifies the message, and *message* is an explanatory message, possibly several lines.

### ENVIRONMENT

#### Arguments to main (5.1.2.2.1)

The function called at program startup is called `main`. No prototype was declared for `main`, and the only definition supported for `main` is:

```
int main(void)
```

To change this behavior for the IAR DLIB runtime environment, see *Customizing system initialization*, page 120.

### **Interactive devices (5.1.2.3)**

The streams `stdin` and `stdout` are treated as interactive devices.

## **IDENTIFIERS**

### **Significant characters without external linkage (6.1.2)**

The number of significant initial characters in an identifier without external linkage is 200.

### **Significant characters with external linkage (6.1.2)**

The number of significant initial characters in an identifier with external linkage is 200.

### **Case distinctions are significant (6.1.2)**

Identifiers with external linkage are treated as case-sensitive.

## **CHARACTERS**

### **Source and execution character sets (5.2.1)**

The source character set is the set of legal characters that can appear in source files. The default source character set is the standard ASCII character set. However, if you use the command line option `--enable_multibytes`, the source character set will be the host computer's default character set.

The execution character set is the set of legal characters that can appear in the execution environment. The default execution character set is the standard ASCII character set. However, if you use the command line option `--enable_multibytes`, the execution character set will be the host computer's default character set. The IAR DLIB Library needs a multibyte character scanner to support a multibyte execution character set.

See *Locale*, page 126.

### **Bits per character in execution character set (5.2.4.2.1)**

The number of bits in a character is represented by the manifest constant `CHAR_BIT`. The standard include file `limits.h` defines `CHAR_BIT` as 8.

### **Mapping of characters (6.1.3.4)**

The mapping of members of the source character set (in character and string literals) to members of the execution character set is made in a one-to-one way. In other words, the same representation value is used for each member in the character sets except for the escape sequences listed in the ISO standard.



### Unrepresented character constants (6.1.3.4)

The value of an integer character constant that contains a character or escape sequence not represented in the basic execution character set or in the extended character set for a wide character constant generates a diagnostic message, and will be truncated to fit the execution character set.

### Character constant with more than one character (6.1.3.4)

An integer character constant that contains more than one character will be treated as an integer constant. The value will be calculated by treating the leftmost character as the most significant character, and the rightmost character as the least significant character, in an integer constant. A diagnostic message will be issued if the value cannot be represented in an integer constant.

A wide character constant that contains more than one multibyte character generates a diagnostic message.

### Converting multibyte characters (6.1.3.4)

The only locale supported—that is, the only locale supplied with the IAR C/C++ Compiler—is the ‘C’ locale. If you use the command line option `--enable_multibytes`, the IAR DLIB Library will support multibyte characters if you add a locale with multibyte support or a multibyte character scanner to the library.

See *Locale*, page 126.

### Range of 'plain' char (6.2.1.1)

A ‘plain’ `char` has the same range as an `unsigned char`.

## INTEGERS

### Range of integer values (6.1.2.5)

The representation of integer values are in the two's complement form. The most significant bit holds the sign; 1 for negative, 0 for positive and zero.

See *Basic data types—integer types*, page 307, for information about the ranges for the different integer types.

### Demotion of integers (6.2.1.2)

Converting an integer to a shorter signed integer is made by truncation. If the value cannot be represented when converting an unsigned integer to a signed integer of equal length, the bit-pattern remains the same. In other words, a large enough value will be converted into a negative value.

### **Signed bitwise operations (6.3)**

Bitwise operations on signed integers work the same way as bitwise operations on unsigned integers; in other words, the sign-bit will be treated as any other bit.

### **Sign of the remainder on integer division (6.3.5)**

The sign of the remainder on integer division is the same as the sign of the dividend.

### **Negative valued signed right shifts (6.3.7)**

The result of a right-shift of a negative-valued signed integral type preserves the sign-bit. For example, shifting `0xFF00` down one step yields `0xFF80`.

## **FLOATING POINT**

### **Representation of floating-point values (6.1.2.5)**

The representation and sets of the various floating-point numbers adheres to IEEE 854–1987. A typical floating-point number is built up of a sign-bit (*s*), a biased exponent (*e*), and a mantissa (*m*).

See *Basic data types—floating-point types*, page 312, for information about the ranges and sizes for the different floating-point types: `float` and `double`.

### **Converting integer values to floating-point values (6.2.1.3)**

When an integral number is cast to a floating-point value that cannot exactly represent the value, the value is rounded (up or down) to the nearest suitable value.

### **Demoting floating-point values (6.2.1.4)**

When a floating-point value is converted to a floating-point value of narrower type that cannot exactly represent the value, the value is rounded (up or down) to the nearest suitable value.

## **ARRAYS AND POINTERS**

### **`size_t` (6.3.3.4, 7.1.1)**

See *size\_t*, page 314, for information about `size_t`.

### **Conversion from/to pointers (6.3.4)**

See *Casting*, page 314, for information about casting of data pointers and function pointers.

**ptrdiff\_t (6.3.6, 7.1.1)**

See *ptrdiff\_t*, page 314, for information about the `ptrdiff_t`.

**REGISTERS****Honoring the register keyword (6.5.1)**

User requests for register variables are not honored.

**STRUCTURES, UNIONS, ENUMERATIONS, AND BITFIELDS****Improper access to a union (6.3.2.3)**

If a union gets its value stored through a member and is then accessed using a member of a different type, the result is solely dependent on the internal storage of the first member.

**Padding and alignment of structure members (6.5.2.1)**

See the section *Basic data types—integer types*, page 307, for information about the alignment requirement for data objects.

**Sign of 'plain' bitfields (6.5.2.1)**

A 'plain' `int` bitfield is treated as an `unsigned int` bitfield. All integer types are allowed as bitfields.

**Allocation order of bitfields within a unit (6.5.2.1)**

Bitfields are allocated within an integer from least-significant to most-significant bit.

**Can bitfields straddle a storage-unit boundary (6.5.2.1)**

Bitfields cannot straddle a storage-unit boundary for the chosen bitfield integer type.

**Integer type chosen to represent enumeration types (6.5.2.2)**

The chosen integer type for a specific enumeration type depends on the enumeration constants defined for the enumeration type. The chosen integer type is the smallest possible.

**QUALIFIERS****Access to volatile objects (6.5.3)**

Any reference to an object with volatile qualified type is an access.

## DECLARATORS

### Maximum numbers of declarators (6.5.4)

The number of declarators is not limited. The number is limited only by the available memory.

## STATEMENTS

### Maximum number of case statements (6.6.4.2)

The number of case statements (case values) in a switch statement is not limited. The number is limited only by the available memory.

## PREPROCESSING DIRECTIVES

### Character constants and conditional inclusion (6.8.1)

The character set used in the preprocessor directives is the same as the execution character set. The preprocessor recognizes negative character values if a 'plain' character is treated as a `signed` character.

### Including bracketed filenames (6.8.2)

For file specifications enclosed in angle brackets, the preprocessor does not search directories of the parent files. A parent file is the file that contains the `#include` directive. Instead, it begins by searching for the file in the directories specified on the compiler command line.

### Including quoted filenames (6.8.2)

For file specifications enclosed in quotes, the preprocessor directory search begins with the directories of the parent file, then proceeds through the directories of any grandparent files. Thus, searching begins relative to the directory containing the source file currently being processed. If there is no grandparent file and the file is not found, the search continues as if the filename was enclosed in angle brackets.

### Character sequences (6.8.2)

Preprocessor directives use the source character set, except for escape sequences. Thus, to specify a path for an include file, use only one backslash:

```
#include "mydirectory\myfile"
```

Within source code, two backslashes are necessary:

```
file = fopen("mydirectory\\myfile", "rt");
```

### Recognized pragma directives (6.8.6)

In addition to the pragma directives described in the chapter *Pragma directives*, the following directives are recognized and will have an indeterminate effect. If a pragma directive is listed both in the chapter *Pragma directives* and here, the information provided in the chapter *Pragma directives* overrides the information here.

```
alignment
baseaddr
basic_template_matching
building_runtime
can_instantiate
codeseg
constseg
cspy_support
dataseg
define_type_info
do_not_instantiate
early_dynamic_initialization
function
function_effects
hdrstop
important_typedef
instantiate
keep_definition
library_default_requirements
library_provides
library_requirement_override
memory
module_name
no_pch
once
```

`system_include`

`vector`

`warnings`

### **Default `__DATE__` and `__TIME__` (6.8.8)**

The definitions for `__TIME__` and `__DATE__` are always available.

## **IAR DLIB LIBRARY FUNCTIONS**

The information in this section is valid only if the runtime library configuration you have chosen supports file descriptors. See the chapter *The DLIB runtime environment* for more information about runtime library configurations.

### **NULL macro (7.1.6)**

The `NULL` macro is defined to 0.

### **Diagnostic printed by the `assert` function (7.2)**

The `assert()` function prints:

```
filename:linenr expression -- assertion failed
```

when the parameter evaluates to zero.

### **Domain errors (7.5.1)**

NaN (Not a Number) will be returned by the mathematic functions on domain errors.

### **Underflow of floating-point values sets `errno` to `ERANGE` (7.5.1)**

The mathematics functions set the integer expression `errno` to `ERANGE` (a macro in `errno.h`) on underflow range errors.

### **`fmod()` functionality (7.5.6.4)**

If the second argument to `fmod()` is zero, the function returns NaN; `errno` is set to `EDOM`.

### **`signal()` (7.7.1.1)**

The signal part of the library is not supported.

**Note:** Low-level interface functions exist in the library, but will not perform anything. Use the template source code to implement application-specific signal handling. See *Signal and raise*, page 130.

**Terminating newline character (7.9.2)**

`stdout` stream functions recognize either `newline` or `end of file (EOF)` as the terminating character for a line.

**Blank lines (7.9.2)**

Space characters written to the `stdout` stream immediately before a newline character are preserved. There is no way to read the line through the `stdin` stream that was written through the `stdout` stream.

**Null characters appended to data written to binary streams (7.9.2)**

No null characters are appended to data written to binary streams.

**Files (7.9.3)**

Whether the file position indicator of an append-mode stream is initially positioned at the beginning or the end of the file, depends on the application-specific implementation of the low-level file routines.

Whether a write operation on a text stream causes the associated file to be truncated beyond that point, depends on the application-specific implementation of the low-level file routines. See *File input and output*, page 126.

The characteristics of the file buffering is that the implementation supports files that are unbuffered, line buffered, or fully buffered.

Whether a zero-length file actually exists depends on the application-specific implementation of the low-level file routines.

Rules for composing valid file names depends on the application-specific implementation of the low-level file routines.

Whether the same file can be simultaneously open multiple times depends on the application-specific implementation of the low-level file routines.

**remove() (7.9.4.1)**

The effect of a `remove` operation on an open file depends on the application-specific implementation of the low-level file routines. See *File input and output*, page 126.

**rename() (7.9.4.2)**

The effect of renaming a file to an already existing filename depends on the application-specific implementation of the low-level file routines. See *File input and output*, page 126.

### **%p in printf() (7.9.6.1)**

The argument to a `%p` conversion specifier, print pointer, to `printf()` is treated as having the type `void *`. The value will be printed as a hexadecimal number, similar to using the `%x` conversion specifier.

### **%p in scanf() (7.9.6.2)**

The `%p` conversion specifier, scan pointer, to `scanf()` reads a hexadecimal number and converts it into a value with the type `void *`.

### **Reading ranges in scanf() (7.9.6.2)**

A - (dash) character is always treated as a range symbol.

### **File position errors (7.9.9.1, 7.9.9.4)**

On file position errors, the functions `fgetpos` and `ftell` store `EFPOS` in `errno`.

### **Message generated by perror() (7.9.10.4)**

The generated message is:

*usersuppliedprefix: errormessage*

### **Allocating zero bytes of memory (7.10.3)**

The `calloc()`, `malloc()`, and `realloc()` functions accept zero as an argument. Memory will be allocated, a valid pointer to that memory is returned, and the memory block can be modified later by `realloc`.

### **Behavior of abort() (7.10.4.1)**

The `abort()` function does not flush stream buffers, and it does not handle files, because this is an unsupported feature.

### **Behavior of exit() (7.10.4.3)**

The argument passed to the `exit` function will be the return value returned by the `main` function to `cstartup`.

### **Environment (7.10.4.4)**

The set of available environment names and the method for altering the environment list is described in *Environment interaction*, page 129.



### **system() (7.10.4.5)**

How the command processor works depends on how you have implemented the `system` function. See *Environment interaction*, page 129.

### **Message returned by strerror() (7.11.6.2)**

The messages returned by `strerror()` depending on the argument is:

| <b>Argument</b> | <b>Message</b>            |
|-----------------|---------------------------|
| EZERO           | no error                  |
| EDOM            | domain error              |
| ERANGE          | range error               |
| EFPOS           | file positioning error    |
| EILSEQ          | multi-byte encoding error |
| <0    >99       | unknown error             |
| all others      | error <i>nnn</i>          |

*Table 55: Message returned by strerror()—IAR DLIB library*

### **The time zone (7.12.1)**

The local time zone and daylight savings time implementation is described in *Time*, page 130.

### **clock() (7.12.2.1)**

From where the system clock starts counting depends on how you have implemented the `clock` function. See *Time*, page 130.



## A

- `__AAPCS__` (predefined symbol) . . . . . 392
  - `--aapcs` (compiler option) . . . . . 238
  - `__AAPCS_VFP__` (predefined symbol) . . . . . 392
  - ABI, AEABI and IA64 . . . . . 196
  - abort
    - implementation-defined behavior. . . . . 491
    - implementation-defined behavior in C89 (DLIB) . . . . 504
    - system termination (DLIB) . . . . . 120
  - `__absolute` (extended keyword). . . . . 323
  - absolute location
    - data, placing at (@) . . . . . 205
    - language support for . . . . . 168
    - placing data in registers (@) . . . . . 207
    - `#pragma` location . . . . . 344
  - `--advanced_heap` (linker option) . . . . . 278
  - `--aeabi` (compiler option) . . . . . 238
  - `__AEABI_PORTABILITY_LEVEL` (preprocessor symbol). . . . . 198
  - `__AEABI_PORTABLE` (preprocessor symbol) . . . . . 198
  - algorithm (STL header file) . . . . . 403
  - alignment . . . . . 305
    - forcing stricter (`#pragma data_alignment`) . . . . . 337
    - in structures (`#pragma pack`) . . . . . 348
    - in structures, causing problems . . . . . 202
    - of an object (`__ALIGNOF__`) . . . . . 168
    - of data types. . . . . 306
    - restrictions for inline assembler . . . . . 143
  - alignment (pragma directive) . . . . . 486, 501
  - `__ALIGNOF__` (operator) . . . . . 168
  - `--align_sp_on_irq` (compiler option) . . . . . 239
  - `--all` (ielfdump option) . . . . . 461
  - anonymous structures . . . . . 203
  - anonymous symbols, creating . . . . . 165
  - ANSI C. *See* C89
  - application
    - building, overview of . . . . . 54
    - execution, overview of . . . . . 50
    - startup and termination (DLIB) . . . . . 117
  - argv (argument), implementation-defined behavior . . . . 480
  - ARM
    - and Thumb code, overview . . . . . 63
    - supported devices. . . . . 42
  - `__arm` (extended keyword) . . . . . 323
  - `--arm` (compiler option). . . . . 239
  - `__ARMVFP__` (predefined symbol). . . . . 393
  - `__ARMVFPV2__` (predefined symbol) . . . . . 393
  - `__ARMVFPV3__` (predefined symbol) . . . . . 393
  - `__ARMVFPV4__` (predefined symbol) . . . . . 393
  - `__ARMVFP_D16__` (predefined symbol) . . . . . 393
  - `__ARMVFP_FP16__` (predefined symbol). . . . . 393
  - `__ARMVFP_SP__` (predefined symbol). . . . . 393
  - `__ARM_ADVANCED_SIMD__` (predefined symbol) . . . . . 392
  - `__ARM_MEDIA__` (predefined symbol) . . . . . 392
  - `__ARM_PROFILE_M__` (predefined symbol). . . . . 393
  - `__ARM4TM__` (predefined symbol) . . . . . 394
  - `__ARM5__` (predefined symbol) . . . . . 394
  - `__ARM5E__` (predefined symbol) . . . . . 394
  - `__ARM6__` (predefined symbol) . . . . . 394
  - `__ARM6M__` (predefined symbol). . . . . 394
  - `__ARM6SM__` (predefined symbol). . . . . 394
  - `__ARM7A__` (predefined symbol) . . . . . 394
  - `__ARM7EM__` (predefined symbol) . . . . . 394
  - `__ARM7M__` (predefined symbol). . . . . 394
  - `__ARM7R__` (predefined symbol) . . . . . 394
- arrays
    - designated initializers in . . . . . 165
    - implementation-defined behavior. . . . . 484
    - implementation-defined behavior in C89 . . . . . 498
    - incomplete at end of structs . . . . . 165
    - non-lvalue . . . . . 171
    - of incomplete types . . . . . 170
    - single-value initialization. . . . . 172
  - asm, `__asm` (language extension) . . . . . 144
  - assembler code
    - calling from C . . . . . 150
    - calling from C++ . . . . . 152

|                                                                           |        |
|---------------------------------------------------------------------------|--------|
| inserting inline . . . . .                                                | 142    |
| assembler directives                                                      |        |
| for call frame information . . . . .                                      | 160    |
| using in inline assembler code . . . . .                                  | 143    |
| assembler instructions                                                    |        |
| for software interrupts . . . . .                                         | 70     |
| assembler instructions, inserting inline . . . . .                        | 142    |
| assembler labels                                                          |        |
| default for application startup . . . . .                                 | 54, 95 |
| making public (--public_equ) . . . . .                                    | 266    |
| assembler language interface . . . . .                                    | 141    |
| calling convention. <i>See</i> assembler code                             |        |
| assembler list file, generating . . . . .                                 | 253    |
| assembler output file . . . . .                                           | 152    |
| asserts . . . . .                                                         | 132    |
| implementation-defined behavior of . . . . .                              | 488    |
| implementation-defined behavior of in C89, (DLIB) . . . . .               | 502    |
| including in application . . . . .                                        | 397    |
| assert.c . . . . .                                                        | 132    |
| assert.h (DLIB header file) . . . . .                                     | 401    |
| __assignment_by_bitwise_copy_allowed, symbol used<br>in library . . . . . | 407    |
| @ (operator)                                                              |        |
| placing at absolute address . . . . .                                     | 205    |
| placing in sections . . . . .                                             | 206    |
| atexit . . . . .                                                          | 133    |
| reserving space for calls . . . . .                                       | 95     |
| atexit limit, setting up . . . . .                                        | 95     |
| attributes                                                                |        |
| object . . . . .                                                          | 321    |
| type . . . . .                                                            | 319    |
| auto variables . . . . .                                                  | 60     |
| at function entrance . . . . .                                            | 156    |
| programming hints for efficient code . . . . .                            | 214    |
| using in inline assembler statements . . . . .                            | 143    |
| auto, packing algorithm for initializers . . . . .                        | 419    |

## B

|                                                               |          |
|---------------------------------------------------------------|----------|
| backtrace information <i>See</i> call frame information       |          |
| Barr, Michael . . . . .                                       | 33       |
| baseaddr (pragma directive) . . . . .                         | 486, 501 |
| __BASE_FILE__ (predefined symbol) . . . . .                   | 394      |
| --basic_heap (linker option) . . . . .                        | 278      |
| basic_template_matching (pragma directive) . . . . .          | 486, 501 |
| batch files                                                   |          |
| error return codes . . . . .                                  | 225      |
| none for building library from command line . . . . .         | 116      |
| --BE32 (linker option) . . . . .                              | 279, 281 |
| --BE8 (linker option) . . . . .                               | 279      |
| __big_endian (extended keyword) . . . . .                     | 324      |
| big-endian (byte order) . . . . .                             | 56       |
| --bin (ielftool option) . . . . .                             | 462      |
| binary streams . . . . .                                      | 489      |
| binary streams in C89 (DLIB) . . . . .                        | 503      |
| bit negation . . . . .                                        | 216      |
| bitfields                                                     |          |
| data representation of . . . . .                              | 308      |
| hints . . . . .                                               | 201      |
| implementation-defined behavior . . . . .                     | 485      |
| implementation-defined behavior in C89 . . . . .              | 499      |
| non-standard types in . . . . .                               | 168      |
| bitfields (pragma directive) . . . . .                        | 335      |
| bits in a byte, implementation-defined behavior . . . . .     | 481      |
| bitset (library header file) . . . . .                        | 403      |
| bold style, in this guide . . . . .                           | 35       |
| bool (data type) . . . . .                                    | 307      |
| adding support for in DLIB . . . . .                          | 402, 405 |
| .bss (ELF section) . . . . .                                  | 434      |
| building_runtime (pragma directive) . . . . .                 | 486, 501 |
| __BUILD_NUMBER__ (predefined symbol) . . . . .                | 394      |
| Burrows-Wheeler algorithm, for packing initializers . . . . . | 419      |
| bwt, packing algorithm for initializers . . . . .             | 419      |
| byte order . . . . .                                          | 56       |
| identifying . . . . .                                         | 396      |

- C**
- C and C++ linkage . . . . . 154
  - C/C++ calling convention. *See* calling convention
  - C header files . . . . . 401
  - C language, overview . . . . . 165
  - call frame information . . . . . 160
    - in assembler list file . . . . . 152
    - in assembler list file (-IA) . . . . . 253
  - call graph root (stack usage control directive). . . . . 441
  - call stack . . . . . 160
  - callee-save registers, stored on stack. . . . . 60
  - calling convention
    - C++, requiring C linkage . . . . . 152
    - in compiler. . . . . 153
  - calloc (library function) . . . . . 61
    - See also* heap
    - implementation-defined behavior in C89 (DLIB) . . . . 504
  - calls (pragma directive). . . . . 336
  - call\_graph (compiler option) . . . . . 280
  - call\_graph\_root (pragma directive). . . . . 337
  - call-info (in stack usage control file). . . . . 444
  - can\_instantiate (pragma directive) . . . . . 486, 501
  - cassert (library header file) . . . . . 404
  - cast operators
    - in Extended EC++ . . . . . 176, 183
    - missing from Embedded C++ . . . . . 176
  - casting
    - of pointers and integers . . . . . 314
    - pointers to integers, language extension. . . . . 171
  - category (in stack usage control file). . . . . 443
  - ccomplex (library header file). . . . . 404
  - cctype (DLIB header file). . . . . 404
  - cerrno (DLIB header file). . . . . 404
  - cexit (system termination code)
    - customizing system termination. . . . . 120
    - in DLIB . . . . . 117
  - cfenv (library header file) . . . . . 404
  - CFI (assembler directive) . . . . . 160
    - CFI\_COMMON\_ARM (call frame information macro) . . 163
    - CFI\_COMMON\_Thumb (call frame information macro). 163
    - CFI\_NAMES\_BLOCK (call frame information macro) . . 163
  - cfloat (DLIB header file). . . . . 404
  - char (data type) . . . . . 307
    - changing default representation (--char\_is\_signed) . . 240
    - changing representation (--char\_is\_unsigned) . . . . 240
    - implementation-defined behavior. . . . . 481
    - signed and unsigned. . . . . 308
  - character set, implementation-defined behavior . . . . . 480
  - characters
    - implementation-defined behavior. . . . . 481
    - implementation-defined behavior in C89 . . . . . 496
  - character-based I/O. . . . . 122
  - char\_is\_signed (compiler option). . . . . 240
  - char\_is\_unsigned (compiler option) . . . . . 240
  - check that (linker directive). . . . . 427
  - checksum
    - display format in C-SPY for symbol . . . . . 196
  - checksum (ielftool option) . . . . . 462
  - checksum, calculation of. . . . . 192
  - cinttypes (DLIB header file). . . . . 404
  - ciso646 (library header file) . . . . . 404
  - climits (DLIB header file). . . . . 404
  - cllobber . . . . . 143
  - locale (DLIB header file) . . . . . 404
  - clock (DLIB library function),
    - implementation-defined behavior in C89 . . . . . 505
  - clock (library function)
    - implementation-defined behavior . . . . . 492
  - clock.c . . . . . 130
  - \_\_close (DLIB library function) . . . . . 126
  - \_\_CLREX (intrinsic function). . . . . 362
  - clustering (compiler transformation). . . . . 213
    - disabling (--no\_clustering). . . . . 256
  - \_\_CLZ (intrinsic function) . . . . . 362
  - cmain (system initialization code)
    - in DLIB . . . . . 117
  - cmath (DLIB header file) . . . . . 405
  - CMSIS integration . . . . . 199

|                                                                             |          |
|-----------------------------------------------------------------------------|----------|
| code                                                                        |          |
| ARM and Thumb, overview . . . . .                                           | 63       |
| facilitating for good generation of . . . . .                               | 214      |
| interruption of execution . . . . .                                         | 66       |
| --code (ielfdump option) . . . . .                                          | 465      |
| code motion (compiler transformation) . . . . .                             | 212      |
| disabling (--no_code_motion) . . . . .                                      | 256      |
| codeseg (pragma directive) . . . . .                                        | 487, 501 |
| __code, symbol used in library . . . . .                                    | 407      |
| command line options                                                        |          |
| <i>See also</i> compiler options                                            |          |
| <i>See also</i> linker options                                              |          |
| part of compiler invocation syntax . . . . .                                | 221      |
| part of linker invocation syntax . . . . .                                  | 222      |
| passing . . . . .                                                           | 222      |
| typographic convention . . . . .                                            | 34       |
| command prompt icon, in this guide . . . . .                                | 35       |
| .comment (ELF section) . . . . .                                            | 434      |
| comments                                                                    |          |
| after preprocessor directives . . . . .                                     | 171      |
| C++ style, using in C code . . . . .                                        | 165      |
| common block (call frame information) . . . . .                             | 161      |
| common subexpr elimination (compiler transformation) . . . . .              | 211      |
| disabling (--no_cse) . . . . .                                              | 257      |
| Common.i (CFI header example file) . . . . .                                | 163      |
| compilation date                                                            |          |
| exact time of (__TIME__) . . . . .                                          | 397      |
| identifying (__DATE__) . . . . .                                            | 394      |
| compiler                                                                    |          |
| environment variables . . . . .                                             | 223      |
| invocation syntax . . . . .                                                 | 221      |
| output from . . . . .                                                       | 224      |
| compiler listing, generating (-l) . . . . .                                 | 253      |
| compiler object file . . . . .                                              | 48       |
| including debug information in (--debug, -r) . . . . .                      | 243      |
| output from compiler . . . . .                                              | 224      |
| compiler optimization levels . . . . .                                      | 210      |
| compiler options . . . . .                                                  | 231      |
| passing to compiler . . . . .                                               | 222      |
| reading from file (-f) . . . . .                                            | 250      |
| specifying parameters . . . . .                                             | 233      |
| summary . . . . .                                                           | 233      |
| syntax . . . . .                                                            | 231      |
| for creating skeleton code . . . . .                                        | 151      |
| instruction scheduling . . . . .                                            | 213      |
| --warnings_affect_exit_code . . . . .                                       | 225      |
| compiler platform, identifying . . . . .                                    | 395      |
| compiler transformations . . . . .                                          | 208      |
| compiler version number . . . . .                                           | 397      |
| compiling                                                                   |          |
| from the command line . . . . .                                             | 54       |
| syntax . . . . .                                                            | 221      |
| complex numbers, supported in Embedded C++ . . . . .                        | 176      |
| complex (library header file) . . . . .                                     | 403      |
| complex.h (library header file) . . . . .                                   | 401      |
| compound literals . . . . .                                                 | 165      |
| computer style, typographic convention . . . . .                            | 34       |
| --config (linker option) . . . . .                                          | 280      |
| configuration                                                               |          |
| basic project settings . . . . .                                            | 54       |
| __low_level_init . . . . .                                                  | 120      |
| configuration file for linker. <i>See</i> linker configuration file         |          |
| configuration symbols                                                       |          |
| for file input and output . . . . .                                         | 126      |
| for locale . . . . .                                                        | 127      |
| for printf and scanf . . . . .                                              | 124      |
| in library configuration files . . . . .                                    | 116, 121 |
| in linker configuration files . . . . .                                     | 428      |
| specifying for linker . . . . .                                             | 280      |
| --config_def (linker option) . . . . .                                      | 280      |
| consistency, module . . . . .                                               | 138      |
| const                                                                       |          |
| declaring objects . . . . .                                                 | 318      |
| non-top level . . . . .                                                     | 171      |
| __constrange(), symbol used in library . . . . .                            | 407      |
| __construction_by_bitwise_copy_allowed, symbol used<br>in library . . . . . | 407      |
| constseg (pragma directive) . . . . .                                       | 487, 501 |
| const_cast (cast operator) . . . . .                                        | 176      |

- contents, of this guide . . . . . 30
  - control characters,
    - implementation-defined behavior . . . . . 493
    - conventions, used in this guide . . . . . 34
    - copyright notice . . . . . 2
    - \_\_CORE\_\_ (predefined symbol). . . . . 394
  - core
    - identifying . . . . . 394
    - selecting. . . . . 55
  - Cortex-M7 . . . . . 199
  - Cortex, special considerations for interrupt functions. . . . . 65
  - cos (library function) . . . . . 400
  - cos (library routine) . . . . . 131–132
  - cosf (library routine). . . . . 131–132
  - cosl (library routine) . . . . . 131–132
  - \_\_cplusplus (predefined symbol) . . . . . 394
  - cpp\_init\_routine (linker option) . . . . . 281
  - cpu (compiler option). . . . . 240
  - \_\_CPU\_MODE\_\_ (predefined symbol) . . . . . 394
  - cpu\_mode (compiler option) . . . . . 241
  - CPU, specifying on command line for compiler . . . . . 240
  - create (iarchive option). . . . . 465
  - csetjmp (DLIB header file) . . . . . 405
  - csignal (DLIB header file) . . . . . 405
  - cspy\_support (pragma directive). . . . . 487, 501
  - CSTACK (ELF block). . . . . 434
    - See also* stack
    - setting up size for. . . . . 95
  - cstartup (system startup code)
    - customizing system initialization. . . . . 120
    - source files for (DLIB). . . . . 117
  - csdarg (DLIB header file) . . . . . 405
  - csdbool (DLIB header file) . . . . . 405
  - csddef (DLIB header file) . . . . . 405
  - csdio (DLIB header file) . . . . . 405
  - csdlib (DLIB header file). . . . . 405
  - cstring (DLIB header file). . . . . 405
  - ctgmath (library header file) . . . . . 405
  - ctime (DLIB header file). . . . . 405
  - ctype.h (library header file). . . . . 401
  - cwctype.h (library header file) . . . . . 405
  - C\_INCLUDE (environment variable) . . . . . 223
  - C-SPY
    - debug support for C++ . . . . . 183
    - including debugging support . . . . . 111
    - interface to system termination . . . . . 120
    - Terminal I/O window, including debug support for . . . 112
  - C++
    - See also* Embedded C++ and Extended Embedded C++
    - absolute location . . . . . 206
    - calling convention . . . . . 152
    - header files. . . . . 402
    - language extensions . . . . . 184
    - standard template library (STL). . . . . 403
    - static member variables . . . . . 206
    - support for . . . . . 41
    - c++ (compiler option) . . . . . 242
  - C++ header files . . . . . 403
  - C++ terminology. . . . . 34
  - C++-style comments. . . . . 165
  - C89
    - implementation-defined behavior. . . . . 495
    - support for . . . . . 165
  - c89 (compiler option). . . . . 239
  - C99. *See* Standard C
- ## D
- D (compiler option). . . . . 242
  - d (iarchive option) . . . . . 465
  - data
    - alignment of. . . . . 305
    - different ways of storing . . . . . 59
    - located, declaring extern . . . . . 206
    - placing . . . . . 204, 269
      - at absolute location . . . . . 205
      - placing in registers . . . . . 207
    - representation of . . . . . 305
    - storage . . . . . 59

|                                                               |          |                                                             |          |
|---------------------------------------------------------------|----------|-------------------------------------------------------------|----------|
| data block (call frame information) . . . . .                 | 161      | deque (STL header file) . . . . .                           | 403      |
| data pointers . . . . .                                       | 314      | destructors and interrupts, using . . . . .                 | 182      |
| data types . . . . .                                          | 307      | device description files, preconfigured for C-SPY . . . . . | 42       |
| floating point . . . . .                                      | 312      | diagnostic messages . . . . .                               | 226      |
| in C++ . . . . .                                              | 318      | classifying as compilation errors . . . . .                 | 244      |
| integer types . . . . .                                       | 307      | classifying as compilation remarks . . . . .                | 244      |
| dataseg (pragma directive) . . . . .                          | 487, 501 | classifying as compiler warnings . . . . .                  | 245      |
| data_alignment (pragma directive) . . . . .                   | 337      | classifying as errors . . . . .                             | 258, 293 |
| .data_init (ELF section) . . . . .                            | 435      | classifying as linker warnings . . . . .                    | 284      |
| __data, symbol used in library . . . . .                      | 407      | classifying as linking errors . . . . .                     | 283      |
| __DATE__ (predefined symbol) . . . . .                        | 394      | classifying as linking remarks . . . . .                    | 283      |
| date (library function), configuring support for . . . . .    | 130      | disabling compiler warnings . . . . .                       | 263      |
| DC32 (assembler directive) . . . . .                          | 143      | disabling linker warnings . . . . .                         | 296      |
| --debug (compiler option) . . . . .                           | 243      | disabling wrapping of in compiler . . . . .                 | 263      |
| debug information, including in object file . . . . .         | 243      | disabling wrapping of in linker . . . . .                   | 296      |
| .debug (ELF section) . . . . .                                | 434      | enabling compiler remarks . . . . .                         | 267      |
| decimal point, implementation-defined behavior . . . . .      | 493      | enabling linker remarks . . . . .                           | 298      |
| declarations . . . . .                                        |          | listing all used by compiler . . . . .                      | 246      |
| empty . . . . .                                               | 172      | listing all used by linker . . . . .                        | 284      |
| in for loops . . . . .                                        | 165      | suppressing in compiler . . . . .                           | 245      |
| Kernighan & Ritchie . . . . .                                 | 215      | suppressing in linker . . . . .                             | 283      |
| of functions . . . . .                                        | 154      | diagnostics . . . . .                                       |          |
| declarations and statements, mixing . . . . .                 | 165      | iarchive . . . . .                                          | 449      |
| declarators, implementation-defined behavior in C89 . . . . . | 500      | iobjmanip . . . . .                                         | 454      |
| default_no_bounds (pragma directive) . . . . .                | 333      | isymexport . . . . .                                        | 460      |
| define block (linker directive) . . . . .                     | 415      | --diagnostics_tables (compiler option) . . . . .            | 246      |
| define memory (linker directive) . . . . .                    | 410      | --diagnostics_tables (linker option) . . . . .              | 284      |
| define overlay (linker directive) . . . . .                   | 417      | diagnostics, implementation-defined behavior . . . . .      | 479      |
| define region (linker directive) . . . . .                    | 411      | diag_default (pragma directive) . . . . .                   | 340      |
| define symbol (linker directive) . . . . .                    | 428      | --diag_error (compiler option) . . . . .                    | 244      |
| --define_symbol (linker option) . . . . .                     | 282      | --diag_error (linker option) . . . . .                      | 283      |
| define_type_info (pragma directive) . . . . .                 | 487, 501 | --no_fragments (compiler option) . . . . .                  | 258      |
| define_without_bounds (pragma directive) . . . . .            | 334      | --no_fragments (linker option) . . . . .                    | 293      |
| define_with_bounds (pragma directive) . . . . .               | 333      | diag_error (pragma directive) . . . . .                     | 340      |
| --delete (iarchive option) . . . . .                          | 465      | --diag_remark (compiler option) . . . . .                   | 244      |
| delete (keyword) . . . . .                                    | 61       | --diag_remark (linker option) . . . . .                     | 283      |
| denormalized numbers. <i>See</i> subnormal numbers            |          | diag_remark (pragma directive) . . . . .                    | 340      |
| --dependencies (compiler option) . . . . .                    | 243      | --diag_suppress (compiler option) . . . . .                 | 245      |
| --dependencies (linker option) . . . . .                      | 282      | --diag_suppress (linker option) . . . . .                   | 283      |



- diag\_suppress (pragma directive) . . . . . 341
  - diag\_warning (compiler option) . . . . . 245
  - diag\_warning (linker option) . . . . . 284
  - diag\_warning (pragma directive) . . . . . 341
  - directives
    - pragma . . . . . 43, 333
    - to the linker . . . . . 409
  - directory, specifying as parameter . . . . . 232
  - disable\_check (pragma directive) . . . . . 334
  - \_\_disable\_fiq (intrinsic function) . . . . . 362
  - \_\_disable\_interrupt (intrinsic function) . . . . . 363
  - \_\_disable\_irq (intrinsic function) . . . . . 363
  - discard\_unused\_publics (compiler option) . . . . . 246
  - disclaimer . . . . . 2
  - DLIB. . . . . 401
    - configurations . . . . . 121
    - configuring . . . . . 104, 246
    - including debug support . . . . . 111
    - naming convention . . . . . 35
    - reference information. *See* the online help system . . . 399
    - runtime environment . . . . . 103
  - dlib\_config (compiler option) . . . . . 246
  - DLib\_Defaults.h (library configuration file) . . . . . 116, 121
  - \_\_DLIB\_FILE\_DESCRIPTOR (configuration symbol) . . 126
  - DLIB, documentation . . . . . 32
  - \_\_DMB (intrinsic function) . . . . . 363
  - do not initialize (linker directive) . . . . . 420
  - document conventions . . . . . 34
  - documentation
    - contents of this . . . . . 30
    - how to use this . . . . . 29
    - overview of guides . . . . . 31
    - who should read this . . . . . 29
  - domain errors, implementation-defined behavior . . . . . 488
  - domain errors, implementation-defined behavior in C89 (DLIB) . . . . . 502
  - double (data type) . . . . . 312
  - do\_not\_instantiate (pragma directive) . . . . . 487, 501
  - \_\_DSB (intrinsic function) . . . . . 363
  - dynamic initialization . . . . . 117
    - and C++ . . . . . 83
  - dynamic memory . . . . . 61
  - dynamic RTTI data, including in the image . . . . . 293
- ## E
- e (compiler option) . . . . . 247
  - early\_initialization (pragma directive) . . . . . 487, 501
  - ec++ (compiler option) . . . . . 248
  - edit (isymexport option) . . . . . 466
  - edition, of this guide . . . . . 2
  - eec++ (compiler option) . . . . . 248
  - ELF utilities . . . . . 447
  - Embedded C++ . . . . . 175
    - differences from C++ . . . . . 176
    - enabling . . . . . 248
    - function linkage . . . . . 154
    - language extensions . . . . . 175
    - overview . . . . . 175
  - Embedded C++ Technical Committee . . . . . 34
  - embedded systems, IAR special support for . . . . . 43
  - \_\_embedded\_cplusplus (predefined symbol) . . . . . 395
  - empty region (in linker configuration file) . . . . . 414
  - \_\_enable\_fiq (intrinsic function) . . . . . 363
  - enable\_hardware\_workaround (compiler option) . . . . . 248
  - enable\_hardware\_workaround (linker option) . . . . . 285
  - \_\_enable\_interrupt (intrinsic function) . . . . . 364
  - \_\_enable\_irq (intrinsic function) . . . . . 364
  - enable\_multibytes (compiler option) . . . . . 249
  - enable\_restrict (compiler option) . . . . . 249
  - enablig restrict keyword . . . . . 249
  - endianness. *See* byte order
  - entry (linker option) . . . . . 285
  - entry label, program . . . . . 118
  - enumerations
    - implementation-defined behavior . . . . . 485
    - implementation-defined behavior in C89 . . . . . 499

|                                                              |          |
|--------------------------------------------------------------|----------|
| enums                                                        |          |
| data representation                                          | 307      |
| forward declarations of                                      | 170      |
| --enum_is_int (compiler option)                              | 250      |
| environment                                                  |          |
| implementation-defined behavior                              | 480      |
| implementation-defined behavior in C89                       | 495      |
| runtime (DLIB)                                               | 103      |
| environment names, implementation-defined behavior           | 481      |
| environment variables                                        |          |
| C_INCLUDE                                                    | 223      |
| ILINKARM_CMD_LINE                                            | 223      |
| QCCARM                                                       | 223      |
| environment (native),<br>implementation-defined behavior     | 494      |
| EQU (assembler directive)                                    | 266      |
| ERANGE                                                       | 488      |
| ERANGE (C89)                                                 | 502      |
| errno value at underflow,<br>implementation-defined behavior | 491      |
| errno.h (library header file)                                | 401      |
| error messages                                               | 228      |
| classifying                                                  | 258, 293 |
| classifying for compiler                                     | 244      |
| classifying for linker                                       | 283      |
| range                                                        | 101      |
| error return codes                                           | 225      |
| error (pragma directive)                                     | 341      |
| --error_limit (compiler option)                              | 250      |
| --error_limit (linker option)                                | 286      |
| escape sequences, implementation-defined behavior            | 481      |
| exception flags, for floating-point values                   | 312      |
| exception handling, missing from Embedded C++                | 176      |
| exception (library header file)                              | 403      |
| exceptions, code for in section                              | 435      |
| --exception_tables (linker option)                           | 286      |
| exclude (stack usage control directive)                      | 440      |
| .exc.text (ELF section)                                      | 435      |
| _Exit (library function)                                     | 120      |
| exit (library function)                                      | 119      |
| implementation-defined behavior                              | 491      |
| implementation-defined behavior in C89                       | 504      |
| _exit (library function)                                     | 119      |
| __exit (library function)                                    | 119      |
| exp (library routine)                                        | 131      |
| expf (library routine)                                       | 131      |
| expl (library routine)                                       | 131      |
| export keyword, missing from Extended EC++                   | 183      |
| export (linker directive)                                    | 429      |
| --export_builtin_config (linker option)                      | 287      |
| expressions (in linker configuration file)                   | 429      |
| extended command line file                                   |          |
| for compiler                                                 | 250      |
| for linker                                                   | 287      |
| passing options                                              | 222      |
| Extended Embedded C++                                        | 176      |
| enabling                                                     | 248      |
| extended keywords                                            | 319      |
| enabling (-e)                                                | 247      |
| overview                                                     | 43       |
| summary                                                      | 322      |
| syntax                                                       |          |
| object attributes                                            | 321      |
| type attributes on data objects                              | 320      |
| type attributes on functions                                 | 321      |
| extended-selectors (in linker configuration file)            | 426      |
| extern "C" linkage                                           | 181      |
| --extract (iarchive option)                                  | 466      |
| --extra_init (linker option)                                 | 287      |
| <b>F</b>                                                     |          |
| -f (compiler option)                                         | 250      |
| -f (IAR utility option)                                      | 467      |
| -f (linker option)                                           | 287      |
| fast interrupts                                              | 68       |
| fatal error messages                                         | 228      |
| fdopen, in stdio.h                                           | 406      |

- fegetrapdisable . . . . . 405
- fegetrapenable . . . . . 405
- FENV\_ACCESS, implementation-defined behavior . . . . . 484
- fenv.h (library header file) . . . . . 401, 404
  - additional C functionality . . . . . 405
- fgetpos (library function), implementation-defined behavior . . . . . 491
- fgetpos (library function), implementation-defined behavior in C89 . . . . . 504
- \_\_FILE\_\_ (predefined symbol) . . . . . 395
- file buffering, implementation-defined behavior . . . . . 489
- file dependencies, tracking . . . . . 243
- file paths, specifying for #include files . . . . . 252
- file position, implementation-defined behavior . . . . . 489
- file streams lock interface . . . . . 135
- file (zero-length), implementation-defined behavior . . . . . 490
- filename
  - extension for device description files . . . . . 42
  - extension for header files . . . . . 42
  - of object executable image . . . . . 297
  - of object file . . . . . 265, 297
  - search procedure for . . . . . 223
  - specifying as parameter . . . . . 232
- filenames (legal), implementation-defined behavior . . . . . 490
- fileno, in stdio.h . . . . . 406
- files, implementation-defined behavior
  - handling of temporary . . . . . 490
  - multibyte characters in . . . . . 490
  - opening . . . . . 490
- fill (ielftool option) . . . . . 467
- \_\_fiq (extended keyword) . . . . . 324
- float (data type) . . . . . 312
- floating-point constants
  - hexadecimal notation . . . . . 165
  - hints . . . . . 202
- floating-point environment, accessing or not . . . . . 352
- floating-point expressions
  - contracting or not . . . . . 352
- floating-point format . . . . . 312
  - hints . . . . . 201–202
  - implementation-defined behavior . . . . . 483
  - implementation-defined behavior in C89 . . . . . 498
  - special cases . . . . . 313
  - 32-bits . . . . . 312
  - 64-bits . . . . . 313
- floating-point status flags . . . . . 405–406
- floating-point unit . . . . . 251
- float.h (library header file) . . . . . 401
- FLT\_EVAL\_METHOD, implementation-defined behavior . . . . . 483, 488, 492
- FLT\_ROUNDS, implementation-defined behavior . . . . . 483, 492
- fmod (library function),
  - implementation-defined behavior in C89 . . . . . 502
  - for loops, declarations in . . . . . 165
- force\_exceptions (linker option) . . . . . 288
- force\_output (linker option) . . . . . 288
- formats
  - floating-point values . . . . . 312
  - standard IEEE (floating point) . . . . . 312
- fpu (compiler option) . . . . . 251
- FP\_CONTRACT, implementation-defined behavior . . . . . 484
- fragmentation, of heap memory . . . . . 61
- free (library function). *See also* heap . . . . . 61
- fsetpos (library function), implementation-defined behavior . . . . . 491
- fstream (library header file) . . . . . 403
- ftell (library function), implementation-defined behavior . 491
  - in C89 . . . . . 504
- Full DLIB (library configuration) . . . . . 121
- \_\_func\_\_ (predefined symbol) . . . . . 172, 395
- \_\_FUNCTION\_\_ (predefined symbol) . . . . . 172, 395
- function calls
  - calling convention . . . . . 153
  - eliminating overhead of by inlining . . . . . 72
  - preserved registers across . . . . . 155
- function declarations, Kernighan & Ritchie . . . . . 215
- function execution, in RAM . . . . . 64
- function inlining (compiler transformation) . . . . . 212
  - disabling (--no\_inline) . . . . . 258

|                                             |                    |
|---------------------------------------------|--------------------|
| function pointers                           | 313                |
| function prototypes                         | 215                |
| enforcing                                   | 267                |
| function (pragma directive)                 | 487, 501           |
| function (stack usage control directive)    | 440                |
| functional (STL header file)                | 403                |
| functions                                   | 63                 |
| declaring                                   | 154, 215           |
| inlining                                    | 165, 212, 214, 342 |
| interrupt                                   | 66                 |
| intrinsic                                   | 141, 214           |
| parameters                                  | 156                |
| placing in memory                           | 204, 206, 269      |
| recursive                                   |                    |
| avoiding                                    | 214                |
| storing data on stack                       | 60                 |
| reentrancy (DLIB)                           | 400                |
| related extensions                          | 63                 |
| return values from                          | 157                |
| function_effects (pragma directive)         | 487, 501           |
| function-spec (in stack usage control file) | 443                |

## G

|                                                     |     |
|-----------------------------------------------------|-----|
| generate_entry_without_bounds (pragma directive)    | 334 |
| getenv (library function), configuring support for  | 129 |
| getw, in stdio.h                                    | 406 |
| getzone (library function), configuring support for | 130 |
| getzone.c                                           | 130 |
| __get_BASEPRI (intrinsic function)                  | 364 |
| __get_CONTROL (intrinsic function)                  | 364 |
| __get_CPSR (intrinsic function)                     | 364 |
| __get_FAULTMASK (intrinsic function)                | 365 |
| __get_FPSCR (intrinsic function)                    | 365 |
| __get_interrupt_state (intrinsic function)          | 365 |
| __get_IPSR (intrinsic function)                     | 366 |
| __get_LR (intrinsic function)                       | 366 |
| __get_MSP (intrinsic function)                      | 366 |
| __get_PRIMASK (intrinsic function)                  | 366 |

|                                   |     |
|-----------------------------------|-----|
| __get_PSP (intrinsic function)    | 366 |
| __get_PSR (intrinsic function)    | 367 |
| __get_SB (intrinsic function)     | 367 |
| __get_SP (intrinsic function)     | 367 |
| global variables                  |     |
| affected by static clustering     | 213 |
| handled during system termination | 119 |
| hints for not using               | 214 |
| initialized during system startup | 118 |
| GRP_COMDAT, group type            | 455 |
| --guard_calls (compiler option)   | 251 |
| guidelines, reading               | 29  |

## H

|                                               |          |
|-----------------------------------------------|----------|
| Harbison, Samuel P.                           | 33       |
| hardware support in compiler                  | 103      |
| hash_map (STL header file)                    | 404      |
| hash_set (STL header file)                    | 404      |
| __has_constructor, symbol used in library     | 407      |
| __has_destructor, symbol used in library      | 407      |
| hdrstop (pragma directive)                    | 487, 501 |
| header files                                  |          |
| C                                             | 401      |
| C++                                           | 402–403  |
| library                                       | 399      |
| special function registers                    | 217      |
| STL                                           | 403      |
| DLib_Defaults.h                               | 116, 121 |
| including stdbool.h for bool                  | 307      |
| including stddef.h for wchar_t                | 308      |
| header names, implementation-defined behavior | 485      |
| --header_context (compiler option)            | 252      |
| heap                                          |          |
| advanced versus basic                         | 189      |
| dynamic memory                                | 61       |
| storing data                                  | 59       |
| VLA allocated on                              | 272      |

- heap segments
    - placing . . . . . 95
  - heap size
    - and standard I/O . . . . . 190
    - changing default . . . . . 95
  - HEAP (ELF section) . . . . . 435
  - heap (zero-sized), implementation-defined behavior . . . . 491
  - hide (isymexport directive) . . . . . 459
  - hints
    - for good code generation . . . . . 214
    - implementation-defined behavior . . . . . 484
    - using efficient data types . . . . . 201
- I**
- I (compiler option) . . . . . 252
  - IAR Command Line Build Utility . . . . . 116
  - IAR Systems Technical Support . . . . . 228
  - iarbuild.exe (utility) . . . . . 116
  - iarchive . . . . . 447
    - commands summary . . . . . 448
    - options summary . . . . . 449
  - \_\_iar\_cos\_accurate (library routine) . . . . . 132
  - \_\_iar\_cos\_accuratef (library routine) . . . . . 132
  - \_\_iar\_cos\_accuratef (library function) . . . . . 400
  - \_\_iar\_cos\_accuratel (library routine) . . . . . 132
  - \_\_iar\_cos\_accuratel (library function) . . . . . 400
  - \_\_iar\_cos\_small (library routine) . . . . . 131
  - \_\_iar\_cos\_smallf (library routine) . . . . . 131
  - \_\_iar\_cos\_smallll (library routine) . . . . . 131
  - \_\_IAR\_DLIB\_PERTHREAD\_INIT\_SIZE (macro) . . . . . 136
  - \_\_IAR\_DLIB\_PERTHREAD\_SIZE (macro) . . . . . 136
  - \_\_IAR\_DLIB\_PERTHREAD\_SYMBOL\_OFFSET (symbolptr) . . . . . 136
  - iar\_dlmalloc.h (library header file)
    - additional C functionality . . . . . 406
  - \_\_iar\_exp\_small (library routine) . . . . . 131
  - \_\_iar\_exp\_smallf (library routine) . . . . . 131
  - \_\_iar\_exp\_smallll (library routine) . . . . . 131
  - \_\_iar\_FPow (library routine) . . . . . 132
  - \_\_iar\_FSin (library routine) . . . . . 131
  - \_\_iar\_log\_small (library routine) . . . . . 131
  - \_\_iar\_log\_smallf (library routine) . . . . . 131
  - \_\_iar\_log\_smallll (library routine) . . . . . 131
  - \_\_iar\_log10\_small (library routine) . . . . . 131
  - \_\_iar\_log10\_smallf (library routine) . . . . . 131
  - \_\_iar\_log10\_smallll (library routine) . . . . . 131
  - \_\_iar\_LPow (library routine) . . . . . 132
  - \_\_iar\_LSin (library routine) . . . . . 131–132
  - \_\_iar\_maximum\_atexit\_calls . . . . . 95
  - \_\_iar\_Pow (library routine) . . . . . 132
  - \_\_iar\_Pow\_accurate (library routine) . . . . . 132
  - \_\_iar\_pow\_accurate (library routine) . . . . . 132
  - \_\_iar\_Pow\_accuratef (library routine) . . . . . 132
  - \_\_iar\_pow\_accuratef (library function) . . . . . 400
  - \_\_iar\_Pow\_accuratel (library routine) . . . . . 132
  - \_\_iar\_pow\_accuratel (library function) . . . . . 400
  - \_\_iar\_pow\_small (library routine) . . . . . 131
  - \_\_iar\_pow\_smallf (library routine) . . . . . 131
  - \_\_iar\_pow\_smallll (library routine) . . . . . 131
  - \_\_iar\_program\_start (label) . . . . . 118
  - \_\_iar\_ReportAssert (library function) . . . . . 132
  - \_\_iar\_Sin (library routine) . . . . . 131–132
  - \_\_iar\_Sin\_accurate (library routine) . . . . . 132
  - \_\_iar\_sin\_accurate (library routine) . . . . . 132
  - \_\_iar\_Sin\_accuratef (library routine) . . . . . 132
  - \_\_iar\_sin\_accuratef (library function) . . . . . 400
  - \_\_iar\_Sin\_accuratel (library routine) . . . . . 132
  - \_\_iar\_sin\_accuratel (library function) . . . . . 400
  - \_\_iar\_Sin\_small (library routine) . . . . . 131
  - \_\_iar\_sin\_small (library routine) . . . . . 131
  - \_\_iar\_Sin\_smallf (library routine) . . . . . 131
  - \_\_iar\_sin\_smallf (library routine) . . . . . 131
  - \_\_iar\_Sin\_smallll (library routine) . . . . . 131

|                                                                             |          |                                                            |          |
|-----------------------------------------------------------------------------|----------|------------------------------------------------------------|----------|
| __iar_sin_smalll (library routine) . . . . .                                | 131      | inheritance, in Embedded C++ . . . . .                     | 175      |
| __IAR_SYSTEMS_ICC__ (predefined symbol) . . . . .                           | 395      | initialization                                             |          |
| __iar_tan_accurate (library routine) . . . . .                              | 132      | changing default. . . . .                                  | 96       |
| __iar_tan_accuratef (library routine). . . . .                              | 132      | C++ dynamic . . . . .                                      | 83       |
| __iar_tan_accuratef (library function). . . . .                             | 400      | dynamic . . . . .                                          | 117      |
| __iar_tan_accuratel (library routine). . . . .                              | 132      | manual . . . . .                                           | 96       |
| __iar_tan_accuratel (library function). . . . .                             | 400      | packing algorithm for. . . . .                             | 96       |
| __iar_tan_small (library routine) . . . . .                                 | 131      | single-value . . . . .                                     | 172      |
| __iar_tan_smallf (library routine). . . . .                                 | 131      | suppressing . . . . .                                      | 96       |
| __iar_tan_smalll (library routine) . . . . .                                | 131      | initialize (linker directive) . . . . .                    | 418      |
| .iar.debug (ELF section) . . . . .                                          | 434      | initializers, static . . . . .                             | 171      |
| .iar.dynexit (ELF section) . . . . .                                        | 436      | .init_array (section). . . . .                             | 436      |
| IA64 ABI . . . . .                                                          | 196      | --inline (linker option). . . . .                          | 289      |
| __ICCARM__ (predefined symbol) . . . . .                                    | 396      | inline assembler . . . . .                                 | 142      |
| icons, in this guide . . . . .                                              | 35       | avoiding . . . . .                                         | 214      |
| IDE                                                                         |          | for passing values between C and assembler . . . . .       | 218      |
| building a library from . . . . .                                           | 116      | <i>See also</i> assembler language interface               |          |
| overview of build tools. . . . .                                            | 39       | inline functions . . . . .                                 | 165      |
| identifiers, implementation-defined behavior . . . . .                      | 481      | in compiler. . . . .                                       | 212      |
| identifiers, implementation-defined behavior in C89 . . . . .               | 496      | inline (pragma directive). . . . .                         | 342      |
| IEEE format, floating-point values . . . . .                                | 312      | inlining functions . . . . .                               | 72       |
| ielfdump . . . . .                                                          | 452      | implementation-defined behavior. . . . .                   | 484      |
| options summary . . . . .                                                   | 453      | installation directory . . . . .                           | 501      |
| ielftool . . . . .                                                          | 450      | instantiate (pragma directive) . . . . .                   | 487, 501 |
| options summary . . . . .                                                   | 451      | instruction scheduling (compiler option). . . . .          | 213      |
| if (linker directive) . . . . .                                             | 431      | int (data type) signed and unsigned. . . . .               | 307      |
| --ihex (ielftool option). . . . .                                           | 468      | integer types . . . . .                                    | 307      |
| ILINK options. <i>See</i> linker options                                    |          | casting . . . . .                                          | 314      |
| ILINKARM_CMD_LINE (environment variable) . . . . .                          | 223      | implementation-defined behavior. . . . .                   | 482      |
| ILINK. <i>See</i> linker                                                    |          | intptr_t . . . . .                                         | 314      |
| --image_input (linker option) . . . . .                                     | 289      | ptrdiff_t . . . . .                                        | 314      |
| important_typedef (pragma directive). . . . .                               | 487, 501 | size_t . . . . .                                           | 314      |
| include files                                                               |          | uintptr_t . . . . .                                        | 314      |
| including before source files . . . . .                                     | 265      | integers, implementation-defined behavior in C89 . . . . . | 497      |
| specifying . . . . .                                                        | 223      | integral promotion . . . . .                               | 216      |
| include (linker directive). . . . .                                         | 431      | Intel hex . . . . .                                        | 187      |
| include_alias (pragma directive). . . . .                                   | 342      | Intel IA64 ABI . . . . .                                   | 196      |
| infinity . . . . .                                                          | 313      | internal error . . . . .                                   | 228      |
| infinity (style for printing), implementation-defined<br>behavior . . . . . | 490      |                                                            |          |

- interrupt functions . . . . . 66
    - fast interrupts . . . . . 68
    - in Cortex . . . . . 65
    - nested interrupts . . . . . 69
    - operations . . . . . 71
    - software interrupts . . . . . 70
  - interrupt handler. *See* interrupt service routine
  - interrupt service routine . . . . . 66
  - interrupt state, restoring . . . . . 377
  - interrupt vector table . . . . . 71
    - start address for . . . . . 67
  - interrupts
    - processor state . . . . . 60
    - using with EC++ destructors . . . . . 182
  - \_\_interwork (extended keyword) . . . . . 324
  - interwork (compiler option) . . . . . 252
  - intptr\_t (integer type) . . . . . 314
  - \_\_intrinsic (extended keyword) . . . . . 324
  - intrinsic functions . . . . . 214
    - for Neon . . . . . 361
    - overview . . . . . 141
    - summary . . . . . 355
  - intrinsics.h (header file) . . . . . 355
  - inttypes.h (library header file) . . . . . 402
  - .intvec (ELF section) . . . . . 436
  - invocation syntax . . . . . 221
  - iobjmanip . . . . . 453
    - options summary . . . . . 454
  - iomanip (library header file) . . . . . 403
  - ios (library header file) . . . . . 403
  - iosfwd (library header file) . . . . . 403
  - iostream (library header file) . . . . . 403
  - \_\_irq (extended keyword) . . . . . 325
  - IRQ\_STACK (section) . . . . . 436
  - \_\_ISB (intrinsic function) . . . . . 367
  - iso646.h (library header file) . . . . . 402
  - istream (library header file) . . . . . 403
  - isymexport . . . . . 456
    - options summary . . . . . 457
  - italic style, in this guide . . . . . 34–35
  - iterator (STL header file) . . . . . 404
  - I/O register. *See* SFR
- ## J
- Josuttis, Nicolai M. . . . . 33
- ## K
- keep (linker option) . . . . . 290
  - keep (linker directive) . . . . . 421
  - keep\_definition (pragma directive) . . . . . 487, 501
  - Kernighan & Ritchie function declarations . . . . . 215
    - disallowing . . . . . 267
  - Kernighan, Brian W. . . . . 33
  - keywords . . . . . 319
    - extended, overview of . . . . . 43
- ## L
- l (compiler option) . . . . . 253
    - for creating skeleton code . . . . . 151
  - labels . . . . . 172
    - assembler, making public . . . . . 266
    - \_\_iar\_program\_start . . . . . 118
    - \_\_program\_start . . . . . 118
  - Labrosse, Jean J. . . . . 33
  - Lajoie, Josée . . . . . 33
  - language extensions
    - Embedded C++ . . . . . 175
    - enabling using pragma . . . . . 343
    - enabling (-e) . . . . . 247
  - language overview . . . . . 41
  - language (pragma directive) . . . . . 343
  - \_\_LDC (intrinsic function) . . . . . 367
  - \_\_LDCL (intrinsic function) . . . . . 367
  - \_\_LDCL\_noidx (intrinsic function) . . . . . 368
  - \_\_LDC\_noidx (intrinsic function) . . . . . 368

|                                                                |          |                                                  |          |
|----------------------------------------------------------------|----------|--------------------------------------------------|----------|
| __LDC2 (intrinsic function) . . . . .                          | 367      | linkage, C and C++ . . . . .                     | 154      |
| __LDC2L (intrinsic function) . . . . .                         | 367      | linker . . . . .                                 | 75       |
| __LDC2L_noidx (intrinsic function) . . . . .                   | 368      | output from . . . . .                            | 226      |
| __LDC2_noidx (intrinsic function) . . . . .                    | 368      | linker configuration file                        |          |
| __LDREX (intrinsic function) . . . . .                         | 369      | for placing code and data . . . . .              | 79       |
| __LDREXB (intrinsic function) . . . . .                        | 369      | in depth . . . . .                               | 409, 439 |
| __LDREXD (intrinsic function) . . . . .                        | 369      | overview of . . . . .                            | 409, 439 |
| __LDREXH (intrinsic function) . . . . .                        | 369      | selecting . . . . .                              | 91       |
| --legacy (compiler option) . . . . .                           | 254      | linker object executable image                   |          |
| Lempel-Ziv-Welch algorithm, for packing initializers . . . . . | 419      | specifying filename of (-o) . . . . .            | 297      |
| libraries . . . . .                                            | 199      | linker options . . . . .                         | 275      |
| reason for using . . . . .                                     | 48       | reading from file (-f) . . . . .                 | 287      |
| standard template library . . . . .                            | 403      | summary . . . . .                                | 275      |
| using a prebuilt . . . . .                                     | 105      | typographic convention . . . . .                 | 34       |
| library configuration files                                    |          | linking                                          |          |
| DLIB . . . . .                                                 | 121      | from the command line . . . . .                  | 54       |
| DLib_Defaults.h . . . . .                                      | 116, 121 | in the build process . . . . .                   | 48       |
| modifying . . . . .                                            | 116      | introduction . . . . .                           | 75       |
| specifying . . . . .                                           | 246      | process for . . . . .                            | 77       |
| library documentation . . . . .                                | 399      | Lippman, Stanley B. . . . .                      | 33       |
| library features, missing from Embedded C++ . . . . .          | 176      | list (STL header file) . . . . .                 | 404      |
| library files, linker search path to (--search) . . . . .      | 299      | listing, generating . . . . .                    | 253      |
| library functions                                              |          | literals, compound . . . . .                     | 165      |
| summary, DLIB . . . . .                                        | 401      | literature, recommended . . . . .                | 33       |
| online help for . . . . .                                      | 33       | __LITTLE_ENDIAN__ (predefined symbol) . . . . .  | 396      |
| library header files . . . . .                                 | 399      | __little_endian (extended keyword) . . . . .     | 325      |
| library modules                                                |          | little-endian (byte order) . . . . .             | 56       |
| introduction . . . . .                                         | 76       | local symbols, removing from ELF image . . . . . | 295      |
| overriding . . . . .                                           | 115      | local variables, <i>See</i> auto variables       |          |
| library object files . . . . .                                 | 399      | locale                                           |          |
| library options, setting . . . . .                             | 57       | adding support for in library . . . . .          | 128      |
| library project, building using a template . . . . .           | 116      | changing at runtime . . . . .                    | 128      |
| library_default_requirements (pragma directive) . . . . .      | 487, 501 | implementation-defined behavior . . . . .        | 482, 493 |
| library_provides (pragma directive) . . . . .                  | 487, 501 | library header file . . . . .                    | 403      |
| library_requirement_override (pragma directive) . . . . .      | 487, 501 | removing support for . . . . .                   | 128      |
| lightbulb icon, in this guide . . . . .                        | 35       | support for . . . . .                            | 127      |
| limits (library header file) . . . . .                         | 403      | locale.h (library header file) . . . . .         | 402      |
| limits.h (library header file) . . . . .                       | 402      | located data, declaring extern . . . . .         | 206      |
| __LINE__ (predefined symbol) . . . . .                         | 396      | location (pragma directive) . . . . .            | 205, 344 |
|                                                                |          | --lock_regs (compiler option) . . . . .          | 254      |



--log (linker option) . . . . . 290  
 log (library routine) . . . . . 131  
 logf (library routine) . . . . . 131  
 logl (library routine) . . . . . 131  
 --log\_file (linker option) . . . . . 291  
 log10 (library routine) . . . . . 131  
 log10f (library routine) . . . . . 131  
 log10l (library routine) . . . . . 131  
 long double (data type) . . . . . 312  
 long float (data type), synonym for double . . . . . 171  
 long long (data type) signed and unsigned . . . . . 307  
 long (data type) signed and unsigned . . . . . 307  
 longjmp, restrictions for using . . . . . 401  
 loop unrolling (compiler transformation) . . . . . 211  
     disabling . . . . . 263  
 loop-invariant expressions . . . . . 212  
 \_\_low\_level\_init . . . . . 118  
     customizing . . . . . 120  
     initialization phase . . . . . 50  
 low\_level\_init.c . . . . . 117  
 low-level processor operations . . . . . 166  
     accessing . . . . . 141  
 \_\_lseek (library function) . . . . . 126  
 lzw, packing algorithm for initializers . . . . . 419  
 lz77, packing algorithm for initializers . . . . . 419

## M

### macros

embedded in #pragma optimize . . . . . 347  
 ERANGE (in errno.h) . . . . . 488, 502  
 inclusion of assert . . . . . 397  
 NULL, implementation-defined behavior . . . . . 489  
     in C89 for DLIB . . . . . 502  
     substituted in #pragma directives . . . . . 166  
     variadic . . . . . 165  
 --macro\_positions\_in\_diagnostics (compiler option) . . . . . 254  
 main (function)  
     definition (C89) . . . . . 495  
     implementation-defined behavior . . . . . 480  
 --make\_all\_definitions\_weak (compiler option) . . . . . 255  
 malloc (library function)  
     *See also* heap . . . . . 61  
     implementation-defined behavior in C89 . . . . . 504  
 --mangled\_names\_in\_messages (linker option) . . . . . 291  
 Mann, Bernhard . . . . . 33  
 -map (linker option) . . . . . 291  
 map file, producing . . . . . 291  
 map (STL header file) . . . . . 404  
 math functions rounding mode,  
     implementation-defined behavior . . . . . 492  
     math functions (library functions) . . . . . 130  
     math.h (library header file) . . . . . 402  
 max recursion depth (stack usage control directive) . . . . . 442  
 MB\_LEN\_MAX, implementation-defined behavior . . . . . 492  
 \_\_MCR (intrinsic function) . . . . . 369  
 \_\_MCR2 (intrinsic function) . . . . . 369  
 memory  
     allocating in C++ . . . . . 61  
     dynamic . . . . . 61  
     heap . . . . . 61  
     non-initialized . . . . . 218  
     RAM, saving . . . . . 214  
     releasing in C++ . . . . . 61  
     stack . . . . . 60  
         saving . . . . . 214  
     used by global or static variables . . . . . 59  
 memory clobber . . . . . 143  
 memory management, type-safe . . . . . 175  
 memory map  
     initializing SFRs . . . . . 120  
     linker configuration for . . . . . 91  
     output from linker . . . . . 226  
     producing (--map) . . . . . 291  
 memory (pragma directive) . . . . . 487, 501  
 memory (STL header file) . . . . . 404  
 \_\_memory\_of  
     symbol used in library . . . . . 407  
 -merge\_duplicate\_sections (linker option) . . . . . 292

|                                                                 |          |
|-----------------------------------------------------------------|----------|
| message (pragma directive) . . . . .                            | 345      |
| messages                                                        |          |
| disabling . . . . .                                             | 270, 300 |
| forcing . . . . .                                               | 345      |
| Meyers, Scott . . . . .                                         | 33       |
| --mfc (compiler option) . . . . .                               | 255      |
| migration                                                       |          |
| from earlier IAR compilers . . . . .                            | 32       |
| MISRA C, documentation . . . . .                                | 32       |
| --misrac (compiler option) . . . . .                            | 235      |
| --misrac (linker option) . . . . .                              | 276      |
| --misrac_verbose (compiler option) . . . . .                    | 235      |
| --misrac_verbose (linker option) . . . . .                      | 277      |
| --misrac1998 (compiler option) . . . . .                        | 235      |
| --misrac1998 (linker option) . . . . .                          | 276      |
| --misrac2004 (compiler option) . . . . .                        | 235      |
| --misrac2004 (linker option) . . . . .                          | 277      |
| mode changing, implementation-defined behavior . . . . .        | 490      |
| module consistency . . . . .                                    | 138      |
| rtmodel . . . . .                                               | 349      |
| modules, introduction . . . . .                                 | 76       |
| module_name (pragma directive) . . . . .                        | 487, 501 |
| module-spec (in stack usage control file) . . . . .             | 443      |
| Motorola S-records . . . . .                                    | 187      |
| __MRC (intrinsic function) . . . . .                            | 370      |
| __MRC2 (intrinsic function) . . . . .                           | 370      |
| multibyte character support . . . . .                           | 249      |
| multibyte characters, implementation-defined behavior . . . . . | 481, 493 |
| multiple inheritance                                            |          |
| in Extended EC++ . . . . .                                      | 176      |
| missing from Embedded C++ . . . . .                             | 176      |
| multithreaded environment . . . . .                             | 133      |
| multi-file compilation . . . . .                                | 209      |
| mutable attribute, in Extended EC++ . . . . .                   | 176, 183 |

## N

|                                                         |          |
|---------------------------------------------------------|----------|
| name (in stack usage control file) . . . . .            | 444      |
| names block (call frame information) . . . . .          | 160      |
| namespace support                                       |          |
| in Extended EC++ . . . . .                              | 176, 183 |
| missing from Embedded C++ . . . . .                     | 176      |
| naming conventions . . . . .                            | 35       |
| NaN                                                     |          |
| implementation of . . . . .                             | 313      |
| implementation-defined behavior . . . . .               | 490      |
| native environment,                                     |          |
| implementation-defined behavior . . . . .               | 494      |
| NDEBUG (preprocessor symbol) . . . . .                  | 397      |
| Neon intrinsic functions . . . . .                      | 361      |
| __nested (extended keyword) . . . . .                   | 325      |
| nested interrupts . . . . .                             | 69       |
| new (keyword) . . . . .                                 | 61       |
| new (library header file) . . . . .                     | 403      |
| no calls from (stack usage control directive) . . . . . | 442      |
| .noinit (ELF section) . . . . .                         | 437      |
| non-initialized variables, hints for . . . . .          | 218      |
| non-scalar parameters, avoiding . . . . .               | 215      |
| NOP (assembler instruction) . . . . .                   | 371      |
| __noreturn (extended keyword) . . . . .                 | 326      |
| Normal DLIB (library configuration) . . . . .           | 121      |
| Not a number (NaN) . . . . .                            | 313      |
| --no_alignment_reduction (compiler option) . . . . .    | 255      |
| no_bounds (pragma directive) . . . . .                  | 334      |
| --no_clustering (compiler option) . . . . .             | 256      |
| --no_code_motion (compiler option) . . . . .            | 256      |
| --no_const_align (compiler option) . . . . .            | 256      |
| --no_cse (compiler option) . . . . .                    | 257      |
| --no_dynamic_rtti_elimination (linker option) . . . . . | 293      |
| --no_exceptions (compiler option) . . . . .             | 257      |
| --no_exceptions (linker option) . . . . .               | 293      |
| __no_init (extended keyword) . . . . .                  | 218, 326 |
| --no_inline (compiler option) . . . . .                 | 258      |
| --no_library_search (linker option) . . . . .           | 294      |
| --no_literal_pool (compiler option) . . . . .           | 258      |
| --no_literal_pool (linker option) . . . . .             | 294      |
| --no_locals (linker option) . . . . .                   | 295      |
| --no_loop_align (compiler option) . . . . .             | 259      |

- no\_mem\_idioms (compiler option) . . . . . 259
  - \_\_no\_operation (intrinsic function) . . . . . 371
  - no\_path\_in\_file\_macros (compiler option) . . . . . 259
  - no\_pch (pragma directive) . . . . . 487, 501
  - no\_range\_reservations (linker option) . . . . . 295
  - no\_remove (linker option) . . . . . 295
  - no\_rtti (compiler option) . . . . . 260
  - no\_rw\_dynamic\_init (compiler option) . . . . . 260
  - no\_scheduling (compiler option) . . . . . 260
  - no\_size\_constraints (compiler option) . . . . . 261
  - no\_static\_destruction (compiler option) . . . . . 261
  - no\_strtab (ielfdump option) . . . . . 468
  - no\_system\_include (compiler option) . . . . . 261
  - no\_tbaa (compiler option) . . . . . 262
  - no\_typedefs\_in\_diagnostics (compiler option) . . . . . 262
  - no\_unaligned\_access (compiler option) . . . . . 262
  - no\_unroll (compiler option) . . . . . 263
  - no\_veneers (linker option) . . . . . 296
  - no\_vfe (compiler option) . . . . . 296
  - no\_warnings (compiler option) . . . . . 263
  - no\_warnings (linker option) . . . . . 296
  - no\_wrap\_diagnostics (compiler option) . . . . . 263
  - no\_wrap\_diagnostics (linker option) . . . . . 296
  - NULL
    - implementation-defined behavior . . . . . 489
    - implementation-defined behavior in C89 (DLIB) . . . . . 502
    - pointer constant, relaxation to Standard C . . . . . 170
  - numbers (in linker configuration file) . . . . . 430
  - numeric conversion functions,
    - implementation-defined behavior . . . . . 494
    - numeric (STL header file) . . . . . 404
- O**
- O (compiler option) . . . . . 264
  - o (compiler option) . . . . . 264
  - o (iarchive option) . . . . . 469
  - o (ielfdump option) . . . . . 469
  - o (linker option) . . . . . 297
  - object attributes . . . . . 321
  - object filename, specifying (-o) . . . . . 265, 297
  - object files, linker search path to (--search) . . . . . 299
  - object\_attribute (pragma directive) . . . . . 218, 345
  - once (pragma directive) . . . . . 487, 501
  - only\_stdout (compiler option) . . . . . 264
  - only\_stdout (linker option) . . . . . 297
  - \_\_open (library function) . . . . . 126
  - operators
    - See also* @ (operator)
    - for cast
      - in Extended EC++. . . . . 176
      - missing from Embedded C++. . . . . 176
    - for region expressions . . . . . 413
    - for section control . . . . . 169
    - precision for 32-bit float . . . . . 312
    - precision for 64-bit float . . . . . 313
    - sizeof, implementation-defined behavior . . . . . 493
    - variants for cast . . . . . 183
    - \_Pragma (preprocessor) . . . . . 165
    - \_\_ALIGNOF\_\_, for alignment control. . . . . 168
    - ?, language extensions for . . . . . 185
  - optimization
    - clustering, disabling . . . . . 256
    - code motion, disabling . . . . . 256
    - common sub-expression elimination, disabling . . . . . 257
    - configuration . . . . . 56
    - disabling . . . . . 211
    - function inlining, disabling (--no\_inline) . . . . . 258
    - hints . . . . . 214
    - loop unrolling, disabling . . . . . 263
    - scheduling, disabling . . . . . 260
    - specifying (-O) . . . . . 264
    - techniques . . . . . 211
    - type-based alias analysis, disabling (--tbaa) . . . . . 262
    - using inline assembler code . . . . . 143
    - using pragma directive . . . . . 346
  - optimization levels . . . . . 210
  - optimize (pragma directive) . . . . . 346

|                                                    |         |
|----------------------------------------------------|---------|
| option parameters                                  | 231     |
| options, compiler. <i>See</i> compiler options     |         |
| options, iarchive. <i>See</i> iarchive options     |         |
| options, ielfdump. <i>See</i> ielfdump options     |         |
| options, ielftool. <i>See</i> ielftool options     |         |
| options, iobjmanip. <i>See</i> iobjmanip options   |         |
| options, isymexport. <i>See</i> isymexport options |         |
| options, linker. <i>See</i> linker options         |         |
| --option_name (compiler option)                    | 285     |
| Oram, Andy                                         | 33      |
| ostream (library header file)                      | 403     |
| output                                             |         |
| from preprocessor                                  | 265     |
| specifying for linker                              | 54      |
| --output (compiler option)                         | 264     |
| --output (iarchive option)                         | 469     |
| --output (ielfdump option)                         | 469     |
| --output (linker option)                           | 297     |
| overhead, reducing                                 | 211–212 |

## P

|                                              |         |
|----------------------------------------------|---------|
| pack (pragma directive)                      | 347     |
| packbits, packing algorithm for initializers | 419     |
| __packed (extended keyword)                  | 326     |
| packed structure types                       | 315     |
| packing, algorithms for initializers         | 419     |
| parameters                                   |         |
| function                                     | 156     |
| hidden                                       | 156     |
| non-scalar, avoiding                         | 215     |
| register                                     | 156     |
| rules for specifying a file or directory     | 232     |
| specifying                                   | 233     |
| stack                                        | 156–157 |
| typographic convention                       | 34      |
| --parity (ielftool option)                   | 469     |
| part number, of this guide                   | 2       |
| __prel (extended keyword)                    | 322     |

|                                                                      |         |
|----------------------------------------------------------------------|---------|
| permanent registers                                                  | 155     |
| perror (library function),<br>implementation-defined behavior in C89 | 504     |
| --pi_veneers (linker option)                                         | 297     |
| __PKHBT (intrinsic function)                                         | 371     |
| __PKHTB (intrinsic function)                                         | 371     |
| place at (linker directive)                                          | 422     |
| place in (linker directive)                                          | 423     |
| placement                                                            |         |
| in named sections                                                    | 206     |
| of code and data, introduction to                                    | 79      |
| --place_holder (linker option)                                       | 298     |
| plain char, implementation-defined behavior                          | 481     |
| __PLD (intrinsic function)                                           | 372     |
| __PLDW (intrinsic function)                                          | 372     |
| __PLI (intrinsic function)                                           | 372     |
| pointer types                                                        | 313     |
| mixing                                                               | 171     |
| pointers                                                             |         |
| casting                                                              | 314     |
| data                                                                 | 314     |
| function                                                             | 313     |
| implementation-defined behavior                                      | 484     |
| implementation-defined behavior in C89                               | 498     |
| polymorphic RTTI data, including in the image                        | 293     |
| polymorphism, in Embedded C++                                        | 175     |
| porting, code containing pragma directives                           | 335     |
| possible calls (stack usage control directive)                       | 441     |
| pow (library routine)                                                | 131–132 |
| alternative implementation of                                        | 400     |
| powf (library routine)                                               | 131–132 |
| powl (library routine)                                               | 131–132 |
| pragma directives                                                    | 43      |
| summary                                                              | 333     |
| for absolute located data                                            | 205     |
| list of all recognized                                               | 486     |
| list of all recognized (C89)                                         | 501     |
| pack                                                                 | 347     |
| __Pragma (preprocessor operator)                                     | 165     |

- predefined symbols
    - overview . . . . . 43
    - summary . . . . . 392
  - predef\_macro (compiler option) . . . . . 265
  - Prefetch\_Handler (exception function) . . . . . 68
  - preinclude (compiler option) . . . . . 265
  - .preinit\_array (section) . . . . . 437
  - .prepreinit\_array (section) . . . . . 437
  - preprocess (compiler option) . . . . . 265
  - preprocessor
    - operator (\_Pragma) . . . . . 165
    - output . . . . . 265
  - preprocessor directives
    - comments at the end of . . . . . 171
    - implementation-defined behavior . . . . . 485
    - implementation-defined behavior in C89 . . . . . 500
    - #pragma . . . . . 333
  - preprocessor extensions
    - \_\_VA\_ARGS\_\_ . . . . . 165
    - #warning message . . . . . 398
  - preprocessor symbols . . . . . 392
    - defining . . . . . 242, 282
  - preserved registers . . . . . 155
    - \_\_PRETTY\_FUNCTION\_\_ (predefined symbol) . . . . . 396
  - print formatter, selecting . . . . . 110
  - printf (library function) . . . . . 109
    - choosing formatter . . . . . 109
    - configuration symbols . . . . . 124
    - implementation-defined behavior . . . . . 491
    - implementation-defined behavior in C89 . . . . . 504
  - \_\_printf\_args (pragma directive) . . . . . 348
  - printing characters, implementation-defined behavior . . . . . 493
  - processor configuration . . . . . 55
  - processor operations
    - accessing . . . . . 141
    - low-level . . . . . 166
  - program entry label . . . . . 118
  - program termination, implementation-defined behavior . . . . . 480
  - programming hints . . . . . 214
  - \_\_program\_start (label) . . . . . 118
  - projects
    - basic settings for . . . . . 54
    - setting up for a library . . . . . 116
  - prototypes, enforcing . . . . . 267
  - ptrdiff\_t (integer type) . . . . . 314
  - PUBLIC (assembler directive) . . . . . 266
  - publication date, of this guide . . . . . 2
  - public\_equ (compiler option) . . . . . 266
  - public\_equ (pragma directive) . . . . . 348
  - putenv (library function), absent from DLIB . . . . . 129
  - putw, in stdio.h . . . . . 406
- ## Q
- \_\_QADD (intrinsic function) . . . . . 372
  - \_\_QADD8 (intrinsic function) . . . . . 373
  - \_\_QADD16 (intrinsic function) . . . . . 373
  - \_\_QASX (intrinsic function) . . . . . 373
  - QCCARM (environment variable) . . . . . 223
  - \_\_QCFlag (intrinsic function) . . . . . 373
  - \_\_QDADD (intrinsic function) . . . . . 372
  - \_\_QDOUBLE (intrinsic function) . . . . . 373
  - \_\_QDSUB (intrinsic function) . . . . . 372
  - \_\_QFlag (intrinsic function) . . . . . 374
  - \_\_QSAX (intrinsic function) . . . . . 373
  - \_\_QSUB (intrinsic function) . . . . . 372
  - \_\_QSUB16 (intrinsic function) . . . . . 373
  - \_\_QSUB8 (intrinsic function) . . . . . 373
  - qualifiers
    - const and volatile . . . . . 316
    - implementation-defined behavior . . . . . 485
    - implementation-defined behavior in C89 . . . . . 499
  - queue (STL header file) . . . . . 404
- ## R
- r (compiler option) . . . . . 243
  - r (iarchive option) . . . . . 473

|                                                   |     |                                               |     |
|---------------------------------------------------|-----|-----------------------------------------------|-----|
| raise (library function), configuring support for | 130 | scratch                                       | 155 |
| raise.c                                           | 130 | reinterpret_cast (cast operator)              | 176 |
| RAM                                               |     | .rel (ELF section)                            | 434 |
| example of declaring region                       | 80  | .rela (ELF section)                           | 434 |
| execution                                         | 64  | --relaxed_fp (compiler option)                | 266 |
| initializers copied from ROM                      | 52  | relay, see veneers                            | 100 |
| running code from                                 | 99  | relocation errors, resolving                  | 101 |
| saving memory                                     | 214 | remark (diagnostic message)                   | 227 |
| __ramfunc (extended keyword)                      | 328 | classifying for compiler                      | 244 |
| --ram_reserve_ranges (isymexport option)          | 470 | classifying for linker                        | 283 |
| range errors                                      | 101 | enabling in compiler                          | 267 |
| --raw (ielfdump option)                           | 471 | enabling in linker                            | 298 |
| __RBIT (intrinsic function)                       | 374 | --remarks (compiler option)                   | 267 |
| __read (library function)                         | 126 | --remarks (linker option)                     | 298 |
| customizing                                       | 122 | remove (library function)                     | 126 |
| read formatter, selecting                         | 111 | implementation-defined behavior               | 490 |
| reading guidelines                                | 29  | implementation-defined behavior in C89 (DLIB) | 503 |
| reading, recommended                              | 33  | --remove_file_path (iobjmanip option)         | 471 |
| realloc (library function)                        | 61  | --remove_section (iobjmanip option)           | 472 |
| implementation-defined behavior in C89            | 504 | remquo, magnitude of                          | 489 |
| <i>See also</i> heap                              |     | rename (isymexport directive)                 | 459 |
| recursive functions                               |     | rename (library function)                     | 126 |
| avoiding                                          | 214 | implementation-defined behavior               | 490 |
| storing data on stack                             | 60  | implementation-defined behavior in C89 (DLIB) | 503 |
| --redirect (linker option)                        | 298 | --rename_section (iobjmanip option)           | 472 |
| reentrancy (DLIB)                                 | 400 | --rename_symbol (iobjmanip option)            | 472 |
| reference information, typographic convention     | 35  | --replace (iarchive option)                   | 473 |
| region expression (in linker configuration file)  | 413 | required (pragma directive)                   | 349 |
| region literal (in linker configuration file)     | 412 | --require_prototypes (compiler option)        | 267 |
| register keyword, implementation-defined behavior | 484 | --reserve_ranges (isymexport option)          | 473 |
| register parameters                               | 156 | reset vector table                            | 436 |
| registered trademarks                             | 2   | __reset_QC_flag (intrinsic function)          | 374 |
| registers                                         |     | __reset_Q_flag (intrinsic function)           | 374 |
| assigning to parameters                           | 157 | restrict keyword, enabling                    | 249 |
| callee-save, stored on stack                      | 60  | return values, from functions                 | 157 |
| for function returns                              | 158 | __REV (intrinsic function)                    | 375 |
| implementation-defined behavior in C89            | 499 | __REVSH (intrinsic function)                  | 375 |
| in assembler-level routines                       | 153 | __REV16 (intrinsic function)                  | 375 |
| preserved                                         | 155 | Ritchie, Dennis M.                            | 33  |

.rodata (ELF section) . . . . . 437  
 ROM to RAM, copying . . . . . 98  
 \_\_root (extended keyword) . . . . . 328  
 \_\_ROPI\_\_ (predefined symbol) . . . . . 396  
 --ropi (compiler option) . . . . . 268  
 routines, time-critical . . . . . 141, 166  
 rtmodel (assembler directive) . . . . . 139  
 rtmodel (pragma directive) . . . . . 349  
 RTTI data (dynamic), including in the image . . . . . 293  
 rtti support, missing from STL . . . . . 177  
 runtime environment  
   DLIB . . . . . 103  
   setting options for . . . . . 57  
   setting up (DLIB) . . . . . 104  
 runtime libraries (DLIB)  
   introduction . . . . . 399  
   customizing system startup code . . . . . 120  
   customizing without rebuilding . . . . . 108  
   filename syntax . . . . . 106  
   overriding modules in . . . . . 115  
   using prebuilt . . . . . 105  
 runtime library  
   setting up from command line . . . . . 57  
   setting up from IDE . . . . . 56  
 runtime model attributes . . . . . 138  
 runtime model definitions . . . . . 350  
 runtime type information, missing from Embedded C++ . 176  
 \_\_RWPI\_\_ (predefined symbol) . . . . . 396  
 --rwp (compiler option) . . . . . 268

## S

-S (iarchive option) . . . . . 475  
 -s (ielfdump option) . . . . . 474  
 \_\_SADD8 (intrinsic function) . . . . . 375  
 \_\_SADD16 (intrinsic function) . . . . . 375  
 \_\_SASX (intrinsic function) . . . . . 375  
 \_\_sbrel (extended keyword) . . . . . 322

scanf (library function)  
   choosing formatter (DLIB) . . . . . 110  
   configuration symbols . . . . . 124  
   implementation-defined behavior . . . . . 491  
   implementation-defined behavior in C89 (DLIB) . . . . 504  
 \_\_scanf\_args (pragma directive) . . . . . 350  
 scheduling (compiler transformation) . . . . . 213  
   disabling . . . . . 260  
 scratch registers . . . . . 155  
 --search (linker option) . . . . . 299  
 search path to library files (--search) . . . . . 299  
 search path to object files (--search) . . . . . 299  
 --section (ielfdump option) . . . . . 474  
 --section (compiler option) . . . . . 269  
 sections  
   summary . . . . . 433  
   allocation of . . . . . 79  
   declaring (#pragma section) . . . . . 350  
   introduction . . . . . 76  
   specifying (--section) . . . . . 269  
 \_\_section\_begin (extended operator) . . . . . 169  
 \_\_section\_end (extended operator) . . . . . 169  
 \_\_section\_size (extended operator) . . . . . 169  
 section-selectors (in linker configuration file) . . . . . 423  
 segment (pragma directive) . . . . . 350  
 segments  
   declaring (#pragma segment) . . . . . 351  
   \_\_SEL (intrinsic function) . . . . . 375  
   --self\_reloc (ielftool option) . . . . . 475  
   --semihosting (linker option) . . . . . 299  
   semihosting, overview . . . . . 112  
   --separate\_cluster\_for\_initialized\_variables  
   (compiler option) . . . . . 269  
 set (STL header file) . . . . . 404  
 setjmp.h (library header file) . . . . . 402  
 setlocale (library function) . . . . . 128  
 settings, basic for project configuration . . . . . 54  
 \_\_set\_BASEPRI (intrinsic function) . . . . . 376  
 \_\_set\_CONTROL (intrinsic function) . . . . . 376  
 \_\_set\_CPSR (intrinsic function) . . . . . 376

|                                                       |          |                                                            |         |
|-------------------------------------------------------|----------|------------------------------------------------------------|---------|
| __set_FAULTMASK (intrinsic function) . . . . .        | 376      | --silent (compiler option) . . . . .                       | 270     |
| __set_FPSCR (intrinsic function) . . . . .            | 376      | --silent (iarchive option) . . . . .                       | 475     |
| __set_interrupt_state (intrinsic function) . . . . .  | 377      | --silent (ielftool option) . . . . .                       | 475     |
| __set_LR (intrinsic function) . . . . .               | 377      | --silent (linker option) . . . . .                         | 300     |
| __set_MSP (intrinsic function) . . . . .              | 377      | silent operation                                           |         |
| __set_PRIMASK (intrinsic function) . . . . .          | 377      | specifying in compiler . . . . .                           | 270     |
| __set_PSP (intrinsic function) . . . . .              | 377      | specifying in linker . . . . .                             | 300     |
| __set_SB (intrinsic function) . . . . .               | 378      | --simple (ielftool option) . . . . .                       | 475     |
| __set_SP (intrinsic function) . . . . .               | 378      | --simple-ne (ielftool option) . . . . .                    | 476     |
| __SEV (intrinsic function) . . . . .                  | 378      | sin (library function) . . . . .                           | 400     |
| severity level, of diagnostic messages . . . . .      | 227      | sin (library routine) . . . . .                            | 131–132 |
| specifying . . . . .                                  | 228      | sinf (library routine) . . . . .                           | 131–132 |
| SFR                                                   |          | sinl (library routine) . . . . .                           | 131–132 |
| accessing special function registers . . . . .        | 217      | 64-bits (floating-point format) . . . . .                  | 313     |
| declaring extern special function registers . . . . . | 206      | size (in stack usage control file) . . . . .               | 445     |
| __SHADD8 (intrinsic function) . . . . .               | 378      | size_t (integer type) . . . . .                            | 314     |
| __SHADD16 (intrinsic function) . . . . .              | 378      | skeleton code, creating for assembler language interface . | 151     |
| shared object . . . . .                               | 225, 292 | --skip_dynamic_initialization (linker option) . . . . .    | 300     |
| __SHASX (intrinsic function) . . . . .                | 378      | slist (STL header file) . . . . .                          | 404     |
| short (data type) . . . . .                           | 307      | smallest, packing algorithm for initializers . . . . .     | 419     |
| show (isymexport directive) . . . . .                 | 458      | __SMLABB (intrinsic function) . . . . .                    | 379     |
| __SHSAX (intrinsic function) . . . . .                | 378      | __SMLABT (intrinsic function) . . . . .                    | 379     |
| .shstrtab (ELF section) . . . . .                     | 434      | __SMLAD (intrinsic function) . . . . .                     | 379     |
| __SHSUB16 (intrinsic function) . . . . .              | 378      | __SMLADX (intrinsic function) . . . . .                    | 379     |
| __SHSUB8 (intrinsic function) . . . . .               | 378      | __SMLALBB (intrinsic function) . . . . .                   | 380     |
| signal (library function)                             |          | __SMLALBT (intrinsic function) . . . . .                   | 380     |
| configuring support for . . . . .                     | 130      | __SMLALD (intrinsic function) . . . . .                    | 380     |
| implementation-defined behavior . . . . .             | 489      | __SMLALDX (intrinsic function) . . . . .                   | 380     |
| implementation-defined behavior in C89 . . . . .      | 502      | __SMLALTB (intrinsic function) . . . . .                   | 380     |
| signals, implementation-defined behavior . . . . .    | 480      | __SMLALTT (intrinsic function) . . . . .                   | 380     |
| at system startup . . . . .                           | 480      | __SMLATB (intrinsic function) . . . . .                    | 379     |
| signal.c . . . . .                                    | 130      | __SMLATT (intrinsic function) . . . . .                    | 379     |
| signal.h (library header file) . . . . .              | 402      | __SMLAWB (intrinsic function) . . . . .                    | 379     |
| signed char (data type) . . . . .                     | 307–308  | __SMLAWT (intrinsic function) . . . . .                    | 379     |
| specifying . . . . .                                  | 240      | __SMLSD (intrinsic function) . . . . .                     | 379     |
| signed int (data type) . . . . .                      | 307      | __SMLSDX (intrinsic function) . . . . .                    | 379     |
| signed long long (data type) . . . . .                | 307      | __SMLSLD (intrinsic function) . . . . .                    | 380     |
| signed long (data type) . . . . .                     | 307      | __SMLSLDX (intrinsic function) . . . . .                   | 380     |
| signed short (data type) . . . . .                    | 307      | __SMMLA (intrinsic function) . . . . .                     | 381     |



- \_\_SMMLAR (intrinsic function) . . . . . 381
- \_\_SMMLS (intrinsic function) . . . . . 381
- \_\_SMMLSR (intrinsic function) . . . . . 381
- \_\_SMMUL (intrinsic function) . . . . . 381
- \_\_SMMULR (intrinsic function) . . . . . 381
- \_\_SMUAD (intrinsic function) . . . . . 381
- \_\_SMUL (intrinsic function) . . . . . 382
- \_\_SMULBB (intrinsic function) . . . . . 382
- \_\_SMULBT (intrinsic function) . . . . . 382
- \_\_SMULTB (intrinsic function) . . . . . 382
- \_\_SMULTT (intrinsic function) . . . . . 382
- \_\_SMULWB (intrinsic function) . . . . . 382
- \_\_SMULWT (intrinsic function) . . . . . 382
- \_\_SMUSD (intrinsic function) . . . . . 381
- \_\_SMUSDX (intrinsic function) . . . . . 381
- software interrupts . . . . . 70
- source files, list all referred . . . . . 252
- space characters, implementation-defined behavior . . . . 489
- special function registers (SFR) . . . . . 217
- sprintf (library function) . . . . . 109
  - choosing formatter . . . . . 109
- srec (ielftool option) . . . . . 476
- srec-len (ielftool option) . . . . . 476
- srec-s3only (ielftool option) . . . . . 476
- \_\_SSAT (intrinsic function) . . . . . 382
- \_\_SSAT16 (intrinsic function) . . . . . 383
- \_\_SSAX (intrinsic function) . . . . . 375
- sscanf (library function)
  - choosing formatter (DLIB) . . . . . 110
- sstream (library header file) . . . . . 403
- \_\_SSUB16 (intrinsic function) . . . . . 375
- \_\_SSUB8 (intrinsic function) . . . . . 375
- stack . . . . . 60
  - advantages and problems using . . . . . 60
  - block for holding . . . . . 434
  - cleaning after function return . . . . . 158
  - contents of . . . . . 60
  - layout . . . . . 157
  - saving space . . . . . 214
  - setting up size for . . . . . 95
  - size . . . . . 188
- stack parameters . . . . . 156–157
- stack pointer . . . . . 60
- stack (STL header file) . . . . . 404
- \_\_stackless (extended keyword) . . . . . 328
- stack\_usage\_control (compiler option) . . . . . 300
- stack-size (in stack usage control file) . . . . . 444
- Standard C . . . . . 249
  - library compliance with . . . . . 399
  - specifying strict usage . . . . . 270
- standard error
  - redirecting in compiler . . . . . 264
  - redirecting in linker . . . . . 297
  - See also diagnostic messages . . . . . 225
- standard input . . . . . 122
- standard output . . . . . 122
  - specifying in compiler . . . . . 264
  - specifying in linker . . . . . 297
- standard template library (STL)
  - in C++ . . . . . 403
  - in Extended EC++ . . . . . 176, 183
  - missing from Embedded C++ . . . . . 176
- startup code
  - cstartup . . . . . 120
- startup system. *See* system startup
- statements, implementation-defined behavior in C89 . . . . 500
- static clustering (compiler transformation) . . . . . 213
- static variables . . . . . 59
  - taking the address of . . . . . 214
- static\_assert() . . . . . 168
- static\_cast (cast operator) . . . . . 176
- status flags for floating-point . . . . . 405–406
- \_\_STC (intrinsic function) . . . . . 383
- \_\_STCL (intrinsic function) . . . . . 383
- \_\_STCL\_noidx (intrinsic function) . . . . . 384
- \_\_STC\_noidx (intrinsic function) . . . . . 384
- \_\_STC2 (intrinsic function) . . . . . 383
- \_\_STC2L (intrinsic function) . . . . . 383

|                                                         |               |                                                  |          |
|---------------------------------------------------------|---------------|--------------------------------------------------|----------|
| __STC2L_noidx (intrinsic function) . . . . .            | 384           | --strict (compiler option) . . . . .             | 270      |
| __STC2_noidx (intrinsic function) . . . . .             | 384           | string (library header file) . . . . .           | 403      |
| std namespace, missing from EC++                        |               | strings, supported in Embedded C++ . . . . .     | 176      |
| and Extended EC++ . . . . .                             | 184           | string.h (library header file) . . . . .         | 402      |
| stdarg.h (library header file) . . . . .                | 402           | string.h, additional C functionality . . . . .   | 406      |
| stdbool.h (library header file) . . . . .               | 307, 402      | --strip (ielftool option) . . . . .              | 477      |
| __STDC__ (predefined symbol) . . . . .                  | 397           | --strip (iobjmanip option) . . . . .             | 477      |
| STDC CX_LIMITED_RANGE (pragma directive) . . . . .      | 351           | --strip (linker option) . . . . .                | 301      |
| STDC FENV_ACCESS (pragma directive) . . . . .           | 351           | strncasecmp, in string.h . . . . .               | 406      |
| STDC FP_CONTRACT (pragma directive) . . . . .           | 352           | strnlen, in string.h . . . . .                   | 406      |
| __STDC_VERSION__ (predefined symbol) . . . . .          | 397           | Stroustrup, Bjarne . . . . .                     | 33       |
| stddef.h (library header file) . . . . .                | 308, 402      | strstream (library header file) . . . . .        | 403      |
| stderr . . . . .                                        | 126, 264, 297 | .strtab (ELF section) . . . . .                  | 434      |
| stderr (library header file) . . . . .                  | 403           | structure types                                  |          |
| stdin . . . . .                                         | 126           | alignment . . . . .                              | 315      |
| implementation-defined behavior in C89 (DLIB) . . . . . | 503           | layout of . . . . .                              | 315      |
| stdint.h (library header file) . . . . .                | 402, 405      | packed . . . . .                                 | 315      |
| stdio.h (library header file) . . . . .                 | 402           | structures                                       |          |
| stdio.h, additional C functionality . . . . .           | 406           | aligning . . . . .                               | 348      |
| stdlib.h (library header file) . . . . .                | 402           | anonymous . . . . .                              | 168, 203 |
| stdout . . . . .                                        | 126, 264, 297 | implementation-defined behavior . . . . .        | 485      |
| implementation-defined behavior . . . . .               | 489           | implementation-defined behavior in C89 . . . . . | 499      |
| implementation-defined behavior in C89 (DLIB) . . . . . | 503           | packing and unpacking . . . . .                  | 203      |
| Steele, Guy L. . . . .                                  | 33            | subnormal numbers . . . . .                      | 312–313  |
| steering file, input to isymexport . . . . .            | 457           | support, technical . . . . .                     | 228      |
| STL . . . . .                                           | 183           | Sutter, Herb . . . . .                           | 33       |
| strcasecmp, in string.h . . . . .                       | 406           | SVC #immed, for software interrupts . . . . .    | 70       |
| strdup, in string.h . . . . .                           | 406           | __swi (extended keyword) . . . . .               | 329      |
| streambuf (library header file) . . . . .               | 403           | SWI_Handler (exception function) . . . . .       | 68       |
| streams                                                 |               | swi_number (pragma directive) . . . . .          | 352      |
| implementation-defined behavior . . . . .               | 480           | SWO, directing stdout/stderr via . . . . .       | 111      |
| supported in Embedded C++ . . . . .                     | 176           | __SWP (intrinsic function) . . . . .             | 385      |
| strerror (library function), implementation-defined     |               | __SWPB (intrinsic function) . . . . .            | 385      |
| behavior . . . . .                                      | 494           | __SXTAB (intrinsic function) . . . . .           | 386      |
| strerror (library function),                            |               | __SXTAB16 (intrinsic function) . . . . .         | 386      |
| implementation-defined behavior in C89 (DLIB) . . . . . | 505           | __SXTAH (intrinsic function) . . . . .           | 386      |
| __STREX (intrinsic function) . . . . .                  | 385           | __SXTB16 (intrinsic function) . . . . .          | 386      |
| __STREXB (intrinsic function) . . . . .                 | 385           | symbols                                          |          |
| __STREXD (intrinsic function) . . . . .                 | 385           | anonymous, creating . . . . .                    | 165      |
| __STREXH (intrinsic function) . . . . .                 | 385           |                                                  |          |

- directing from one to another . . . . . 298
- including in output . . . . . 349
- local, removing from ELF image . . . . . 295
- overview of predefined . . . . . 43
- preprocessor, defining . . . . . 242, 282
- symbols (iarchive option) . . . . . 477
- .symtab (ELF section) . . . . . 434
- syntax
  - command line options . . . . . 231
  - extended keywords . . . . . 320–321
  - invoking compiler and linker . . . . . 221
- system function, implementation-defined behavior . . 481, 491
- system locks interface . . . . . 135
- system startup
  - customizing . . . . . 120
  - DLIB . . . . . 117
  - initialization phase . . . . . 50
- system termination
  - C-SPY interface to . . . . . 120
  - DLIB . . . . . 119
- system (library function)
  - configuring support for . . . . . 129
  - implementation-defined behavior in C89 (DLIB) . . . 505
- system\_include (pragma directive) . . . . . 487, 502
- system\_include\_dir (compiler option) . . . . . 270

**T**

- t (iarchive option) . . . . . 478
- tan (library function) . . . . . 400
- tan (library routine) . . . . . 131–132
- tanf (library routine) . . . . . 131–132
- tanl (library routine) . . . . . 131–132
- \_\_task (extended keyword) . . . . . 330
- technical support, IAR Systems . . . . . 228
- template support
  - in Extended EC++ . . . . . 176, 183
  - missing from Embedded C++ . . . . . 176

- Terminal I/O window
  - making available (DLIB) . . . . . 112
  - not supported when . . . . . 115
- terminal I/O, debugger runtime interface for . . . . . 112
- terminal output, speeding up . . . . . 113
- termination of system. *See* system termination
- termination status, implementation-defined behavior . . . 491
- terminology . . . . . 34
- .text (ELF section) . . . . . 437
- tgmath.h (library header file) . . . . . 402
- 32-bits (floating-point format) . . . . . 312
- this (pointer) . . . . . 152
- threaded environment . . . . . 133
- threaded\_lib (linker option) . . . . . 301
- thread-local storage . . . . . 135
- \_\_thumb (extended keyword) . . . . . 330
- thumb (compiler option) . . . . . 271
- \_\_TIME\_\_ (predefined symbol) . . . . . 397
- time zone (library function)
  - implementation-defined behavior in C89 . . . . . 505
- time zone (library function), implementation-defined
  - behavior . . . . . 492
- time-critical routines . . . . . 141, 166
- time.c . . . . . 130
- time.h (library header file) . . . . . 402
  - additional C functionality . . . . . 406
- time32 (library function), configuring support for . . . . . 130
- time64 (library function), configuring support for . . . . . 130
- tips, programming . . . . . 214
- titxt (ielftool option) . . . . . 478
- TLS handling . . . . . 135
- toc (iarchive option) . . . . . 478
- tools icon, in this guide . . . . . 35
- trademarks . . . . . 2
- transformations, compiler . . . . . 208
- translation
  - implementation-defined behavior . . . . . 479
  - implementation-defined behavior in C89 . . . . . 495
- type attributes . . . . . 319
  - specifying . . . . . 353

|                                                     |     |
|-----------------------------------------------------|-----|
| type qualifiers                                     |     |
| const and volatile                                  | 316 |
| implementation-defined behavior                     | 485 |
| implementation-defined behavior in C89              | 499 |
| typedefs                                            |     |
| excluding from diagnostics                          | 262 |
| repeated                                            | 171 |
| typeid (library header file)                        | 403 |
| type_attribute (pragma directive)                   | 353 |
| type-based alias analysis (compiler transformation) | 212 |
| disabling                                           | 262 |
| type-safe memory management                         | 175 |
| typographic conventions                             | 34  |

## U

|                                                                |          |
|----------------------------------------------------------------|----------|
| __UADD8 (intrinsic function)                                   | 386      |
| __UADD16 (intrinsic function)                                  | 386      |
| __UASX (intrinsic function)                                    | 386      |
| uchar.h (library header file)                                  | 402      |
| __UHADD8 (intrinsic function)                                  | 387      |
| __UHADD16 (intrinsic function)                                 | 387      |
| __UHASX (intrinsic function)                                   | 387      |
| __UHSAX (intrinsic function)                                   | 387      |
| __UHSUB16 (intrinsic function)                                 | 387      |
| __UHSUB8 (intrinsic function)                                  | 387      |
| uintptr_t (integer type)                                       | 314      |
| __UMAAL (intrinsic function)                                   | 387      |
| underflow errors, implementation-defined behavior              | 488      |
| underflow range errors, implementation-defined behavior in C89 | 502      |
| __ungetchar, in stdio.h                                        | 406      |
| unions                                                         |          |
| anonymous                                                      | 168, 203 |
| implementation-defined behavior                                | 485      |
| implementation-defined behavior in C89                         | 499      |
| universal character names, implementation-defined behavior     | 486      |

|                                                   |         |
|---------------------------------------------------|---------|
| unsigned char (data type)                         | 307–308 |
| changing to signed char                           | 240     |
| unsigned int (data type)                          | 307     |
| unsigned long long (data type)                    | 307     |
| unsigned long (data type)                         | 307     |
| unsigned short (data type)                        | 307     |
| __UQADD8 (intrinsic function)                     | 388     |
| __UQADD16 (intrinsic function)                    | 388     |
| __UQASX (intrinsic function)                      | 388     |
| __UQSAX (intrinsic function)                      | 388–389 |
| __UQSUB16 (intrinsic function)                    | 388–389 |
| __UQSUB8 (intrinsic function)                     | 388–389 |
| __USADA8 (intrinsic function)                     | 388     |
| __USAD8 (intrinsic function)                      | 388     |
| __USAT (intrinsic function)                       | 388     |
| __USAT16 (intrinsic function)                     | 389     |
| __USAX (intrinsic function)                       | 386     |
| --use_c++_inline (compiler option)                | 271     |
| --use_unix_directory_separators (compiler option) | 271     |
| __USUB16 (intrinsic function)                     | 386     |
| __USUB8 (intrinsic function)                      | 386     |
| utilities (ELF)                                   | 447     |
| utility (STL header file)                         | 404     |
| __UXTAB (intrinsic function)                      | 389     |

## V

|                                  |     |
|----------------------------------|-----|
| -V (iarchive option)             | 478 |
| valarray (library header file)   | 404 |
| variables                        |     |
| auto                             | 60  |
| defined inside a function        | 60  |
| global                           |     |
| placement in memory              | 59  |
| hints for choosing               | 214 |
| local. <i>See</i> auto variables |     |
| non-initialized                  | 218 |
| placing at absolute addresses    | 206 |
| placing in named sections        | 206 |

static  
  placement in memory . . . . . 59  
  taking the address of . . . . . 214

variadic macros . . . . . 169

vector floating-point unit . . . . . 251

vector (pragma directive) . . . . . 487, 502

vector (STL header file) . . . . . 404

--vectorize (compiler option) . . . . . 271

vectorize (pragma directive) . . . . . 353

\_\_vector\_table, array holding vector table . . . . . 65

veneers . . . . . 100

--verbose (iarchive option) . . . . . 478

--verbose (ielftool option) . . . . . 478

version  
  identifying C standard in use (\_\_STDC\_VERSION\_\_) 397  
  of compiler (\_\_VER\_\_) . . . . . 397  
  of this guide . . . . . 2

--vfe (compiler option) . . . . . 301

VFP . . . . . 251

--vla (compiler option) . . . . . 272

void, pointers to . . . . . 170

volatile  
  and const, declaring objects . . . . . 318  
  declaring objects . . . . . 317  
  protecting simultaneously accesses variables . . . . . 216  
  rules for access . . . . . 317

## W

#warning message (preprocessor extension) . . . . . 398

warnings . . . . . 228  
  classifying in compiler . . . . . 245  
  classifying in linker . . . . . 284  
  disabling in compiler . . . . . 263  
  disabling in linker . . . . . 296  
  exit code in compiler . . . . . 272  
  exit code in linker . . . . . 302

warnings icon, in this guide . . . . . 35

warnings (pragma directive) . . . . . 487, 502

--warnings\_affect\_exit\_code (compiler option) . . . . . 225, 272

--warnings\_affect\_exit\_code (linker option) . . . . . 302

--warnings\_are\_errors (compiler option) . . . . . 273

--warnings\_are\_errors (linker option) . . . . . 302

--warn\_about\_c\_style\_casts (compiler option) . . . . . 272

wchar\_t (data type), adding support for in C . . . . . 308

wchar.h (library header file) . . . . . 402, 405

wctype.h (library header file) . . . . . 402

\_\_weak (extended keyword) . . . . . 331

weak (pragma directive) . . . . . 354

web sites, recommended . . . . . 34

\_\_WFE (intrinsic function) . . . . . 389

\_\_WFI (intrinsic function) . . . . . 389

white-space characters, implementation-defined behavior 479

--whole\_archive (linker option) . . . . . 302

\_\_write (library function) . . . . . 126  
  customizing . . . . . 122

\_\_write\_array, in stdio.h . . . . . 406

\_\_write\_buffered (DLIB library function) . . . . . 113

## X

-x (iarchive option) . . . . . 466

## Y

\_\_YIELD (intrinsic function) . . . . . 389

## Z

zeros, packing algorithm for initializers . . . . . 419

## Symbols

\_\_AEABI\_PORTABILITY\_LEVEL (preprocessor symbol) . . . . . 198

\_\_AEABI\_PORTABLE (preprocessor symbol) . . . . . 198

\_\_Exit (library function) . . . . . 120

|                                                                                         |     |                                                                                           |          |
|-----------------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------------------------|----------|
| <code>_exit</code> (library function) . . . . .                                         | 119 | <code>__construction_by_bitwise_copy_allowed</code> , symbol used<br>in library . . . . . | 407      |
| <code>__AAPCS_VFP__</code> (predefined symbol) . . . . .                                | 392 | <code>__CORE__</code> (predefined symbol) . . . . .                                       | 394      |
| <code>__AAPCS__</code> (predefined symbol) . . . . .                                    | 392 | <code>__cplusplus</code> (predefined symbol) . . . . .                                    | 394      |
| <code>__absolute</code> (extended keyword) . . . . .                                    | 323 | <code>__CPU_MODE__</code> (predefined symbol) . . . . .                                   | 394      |
| <code>__ALIGNOF__</code> (operator) . . . . .                                           | 168 | <code>__data</code> , symbol used in library . . . . .                                    | 407      |
| <code>__arm</code> (extended keyword) . . . . .                                         | 323 | <code>__DATE__</code> (predefined symbol) . . . . .                                       | 394      |
| <code>__ARMVFPV2__</code> (predefined symbol) . . . . .                                 | 393 | <code>__disable_fiq</code> (intrinsic function) . . . . .                                 | 362      |
| <code>__ARMVFPV3__</code> (predefined symbol) . . . . .                                 | 393 | <code>__disable_interrupt</code> (intrinsic function) . . . . .                           | 363      |
| <code>__ARMVFPV4__</code> (predefined symbol) . . . . .                                 | 393 | <code>__disable_irq</code> (intrinsic function) . . . . .                                 | 363      |
| <code>__ARMVFP_D16__</code> (predefined symbol) . . . . .                               | 393 | <code>__DLIB_FILE_DESCRIPTOR</code> (configuration symbol) . . . . .                      | 126      |
| <code>__ARMVFP_FP16__</code> (predefined symbol) . . . . .                              | 393 | <code>__DLIB_PERTHREAD</code> (ELF section) . . . . .                                     | 435      |
| <code>__ARMVFP_SP__</code> (predefined symbol) . . . . .                                | 393 | <code>__DMB</code> (intrinsic function) . . . . .                                         | 363      |
| <code>__ARMVFP__</code> (predefined symbol) . . . . .                                   | 393 | <code>__DSB</code> (intrinsic function) . . . . .                                         | 363      |
| <code>__ARM_ADVANCED_SIMD__</code> (predefined symbol) . . . . .                        | 392 | <code>__embedded_cplusplus</code> (predefined symbol) . . . . .                           | 395      |
| <code>__ARM_MEDIA__</code> (predefined symbol) . . . . .                                | 392 | <code>__enable_fiq</code> (intrinsic function) . . . . .                                  | 363      |
| <code>__ARM_PROFILE_M__</code> (predefined symbol) . . . . .                            | 393 | <code>__enable_interrupt</code> (intrinsic function) . . . . .                            | 364      |
| <code>__ARM4TM__</code> (predefined symbol) . . . . .                                   | 394 | <code>__enable_irq</code> (intrinsic function) . . . . .                                  | 364      |
| <code>__ARM5E__</code> (predefined symbol) . . . . .                                    | 394 | <code>__exit</code> (library function) . . . . .                                          | 119      |
| <code>__ARM5__</code> (predefined symbol) . . . . .                                     | 394 | <code>__FILE__</code> (predefined symbol) . . . . .                                       | 395      |
| <code>__ARM6M__</code> (predefined symbol) . . . . .                                    | 394 | <code>__fiq</code> (extended keyword) . . . . .                                           | 324      |
| <code>__ARM6SM__</code> (predefined symbol) . . . . .                                   | 394 | <code>__FUNCTION__</code> (predefined symbol) . . . . .                                   | 172, 395 |
| <code>__ARM6__</code> (predefined symbol) . . . . .                                     | 394 | <code>__func__</code> (predefined symbol) . . . . .                                       | 172, 395 |
| <code>__ARM7A__</code> (predefined symbol) . . . . .                                    | 394 | <code>__gets</code> , in <code>stdio.h</code> . . . . .                                   | 406      |
| <code>__ARM7EM__</code> (predefined symbol) . . . . .                                   | 394 | <code>__get_BASEPRI</code> (intrinsic function) . . . . .                                 | 364      |
| <code>__ARM7M__</code> (predefined symbol) . . . . .                                    | 394 | <code>__get_CONTROL</code> (intrinsic function) . . . . .                                 | 364      |
| <code>__ARM7R__</code> (predefined symbol) . . . . .                                    | 394 | <code>__get_CPSR</code> (intrinsic function) . . . . .                                    | 364      |
| <code>__asm</code> (language extension) . . . . .                                       | 144 | <code>__get_FAULTMASK</code> (intrinsic function) . . . . .                               | 365      |
| <code>__assignment_by_bitwise_copy_allowed</code> , symbol used<br>in library . . . . . | 407 | <code>__get_FPSCR</code> (intrinsic function) . . . . .                                   | 365      |
| <code>__as_get_base</code> (C-RUN operator) . . . . .                                   | 355 | <code>__get_interrupt_state</code> (intrinsic function) . . . . .                         | 365      |
| <code>__as_get_bounds</code> (C-RUN operator) . . . . .                                 | 355 | <code>__get_IPSR</code> (intrinsic function) . . . . .                                    | 366      |
| <code>__as_make_bounds</code> (C-RUN operator) . . . . .                                | 355 | <code>__get_LR</code> (intrinsic function) . . . . .                                      | 366      |
| <code>__BASE_FILE__</code> (predefined symbol) . . . . .                                | 394 | <code>__get_MSP</code> (intrinsic function) . . . . .                                     | 366      |
| <code>__big_endian</code> (extended keyword) . . . . .                                  | 324 | <code>__get_PRIMASK</code> (intrinsic function) . . . . .                                 | 366      |
| <code>__BUILD_NUMBER__</code> (predefined symbol) . . . . .                             | 394 | <code>__get_PSP</code> (intrinsic function) . . . . .                                     | 366      |
| <code>__close</code> (library function) . . . . .                                       | 126 | <code>__get_PSR</code> (intrinsic function) . . . . .                                     | 367      |
| <code>__CLREX</code> (intrinsic function) . . . . .                                     | 362 | <code>__get_SB</code> (intrinsic function) . . . . .                                      | 367      |
| <code>__CLZ</code> (intrinsic function) . . . . .                                       | 362 | <code>__get_SP</code> (intrinsic function) . . . . .                                      | 367      |
| <code>__code</code> , symbol used in library . . . . .                                  | 407 | <code>__has_constructor</code> , symbol used in library . . . . .                         | 407      |
| <code>__constrange()</code> , symbol used in library . . . . .                          | 407 | <code>__has_destructor</code> , symbol used in library . . . . .                          | 407      |

- `__iar_cos_accurate` (library routine) . . . . . 132
- `__iar_cos_accuratef` (library routine) . . . . . 132
- `__iar_cos_accuratel` (library routine) . . . . . 132
- `__iar_cos_small` (library routine) . . . . . 131
- `__iar_cos_smallf` (library routine) . . . . . 131
- `__iar_cos_smalll` (library routine) . . . . . 131
- `__IAR_DLIB_PERTHREAD_INIT_SIZE` (macro) . . . . . 136
- `__IAR_DLIB_PERTHREAD_SIZE` (macro) . . . . . 136
- `__IAR_DLIB_PERTHREAD_SYMBOL_OFFSET`  
(symbolptr) . . . . . 136
- `__iar_exp_small` (library routine) . . . . . 131
- `__iar_exp_smallf` (library routine) . . . . . 131
- `__iar_exp_smalll` (library routine) . . . . . 131
- `__iar_FPow` (library routine) . . . . . 132
- `__iar_FSin` (library routine) . . . . . 131–132
- `__iar_log_small` (library routine) . . . . . 131
- `__iar_log_smallf` (library routine) . . . . . 131
- `__iar_log_smalll` (library routine) . . . . . 131
- `__iar_log10_small` (library routine) . . . . . 131
- `__iar_log10_smallf` (library routine) . . . . . 131
- `__iar_log10_smalll` (library routine) . . . . . 131
- `__iar_LPow` (library routine) . . . . . 132
- `__iar_LSin` (library routine) . . . . . 131–132
- `__iar_maximum_atexit_calls` . . . . . 95
- `__iar_Pow` (library routine) . . . . . 132
- `__iar_Pow_accurate` (library routine) . . . . . 132
- `__iar_pow_accurate` (library routine) . . . . . 132
- `__iar_Pow_accuratef` (library routine) . . . . . 132
- `__iar_pow_accuratef` (library routine) . . . . . 132
- `__iar_pow_accuratel` (library routine) . . . . . 132
- `__iar_pow_small` (library routine) . . . . . 131
- `__iar_pow_smallf` (library routine) . . . . . 131
- `__iar_pow_smalll` (library routine) . . . . . 131
- `__iar_program_start` (label) . . . . . 118
- `__iar_ReportAssert` (library function) . . . . . 132
- `__iar_Sin` (library routine) . . . . . 131–132
- `__iar_Sin_accurate` (library routine) . . . . . 132
- `__iar_sin_accurate` (library routine) . . . . . 132
- `__iar_Sin_accuratef` (library routine) . . . . . 132
- `__iar_sin_accuratef` (library routine) . . . . . 132
- `__iar_Sin_accuratel` (library routine) . . . . . 132
- `__iar_sin_accuratel` (library routine) . . . . . 132
- `__iar_Sin_small` (library routine) . . . . . 131
- `__iar_sin_small` (library routine) . . . . . 131
- `__iar_Sin_smallf` (library routine) . . . . . 131
- `__iar_sin_smallf` (library routine) . . . . . 131
- `__iar_Sin_smalll` (library routine) . . . . . 131
- `__iar_sin_smalll` (library routine) . . . . . 131
- `__IAR_SYSTEMS_ICC__` (predefined symbol) . . . . . 395
- `__iar_tan_accurate` (library routine) . . . . . 132
- `__iar_tan_accuratef` (library routine) . . . . . 132
- `__iar_tan_accuratel` (library routine) . . . . . 132
- `__iar_tan_small` (library routine) . . . . . 131
- `__iar_tan_smallf` (library routine) . . . . . 131
- `__iar_tan_smalll` (library routine) . . . . . 131
- `__ICCARM__` (predefined symbol) . . . . . 396
- `__interwork` (extended keyword) . . . . . 324
- `__intrinsic` (extended keyword) . . . . . 324
- `__irq` (extended keyword) . . . . . 325
- `__ISB` (intrinsic function) . . . . . 367
- `__LDC` (intrinsic function) . . . . . 367
- `__LDCL` (intrinsic function) . . . . . 367
- `__LDCL_noidx` (intrinsic function) . . . . . 368
- `__LDC_noidx` (intrinsic function) . . . . . 368
- `__LDC2` (intrinsic function) . . . . . 367
- `__LDC2L` (intrinsic function) . . . . . 367
- `__LDC2L_noidx` (intrinsic function) . . . . . 368
- `__LDC2_noidx` (intrinsic function) . . . . . 368
- `__LDREX` (intrinsic function) . . . . . 369
- `__LDREXB` (intrinsic function) . . . . . 369
- `__LDREXD` (intrinsic function) . . . . . 369
- `__LDREXH` (intrinsic function) . . . . . 369
- `__LINE__` (predefined symbol) . . . . . 396
- `__little_endian` (extended keyword) . . . . . 325
- `__LITTLE_ENDIAN__` (predefined symbol) . . . . . 396
- `__low_level_init` . . . . . 118
- initialization phase . . . . . 50
- `__low_level_init, customizing` . . . . . 120
- `__lseek` (library function) . . . . . 126

|                                                   |          |                                                      |     |
|---------------------------------------------------|----------|------------------------------------------------------|-----|
| __MCR (intrinsic function) . . . . .              | 369      | __reset_Q_flag (intrinsic function) . . . . .        | 374 |
| __MCR2 (intrinsic function) . . . . .             | 369      | __REV (intrinsic function) . . . . .                 | 375 |
| __memory_of                                       |          | __REVSH (intrinsic function) . . . . .               | 375 |
| symbol used in library . . . . .                  | 407      | __REV16 (intrinsic function) . . . . .               | 375 |
| __MRC (intrinsic function) . . . . .              | 370      | __root (extended keyword) . . . . .                  | 328 |
| __MRC2 (intrinsic function) . . . . .             | 370      | __ROPI__ (predefined symbol) . . . . .               | 396 |
| __nested (extended keyword) . . . . .             | 325      | __RWPI__ (predefined symbol) . . . . .               | 396 |
| __noreturn (extended keyword) . . . . .           | 326      | __SADD8 (intrinsic function) . . . . .               | 375 |
| __no_init (extended keyword) . . . . .            | 218, 326 | __SADD16 (intrinsic function) . . . . .              | 375 |
| __no_operation (intrinsic function) . . . . .     | 371      | __SASX (intrinsic function) . . . . .                | 375 |
| __open (library function) . . . . .               | 126      | __sbrel (extended keyword) . . . . .                 | 322 |
| __packed (extended keyword) . . . . .             | 326      | __scanf_args (pragma directive) . . . . .            | 350 |
| __pcrel (extended keyword) . . . . .              | 322      | __section_begin (extended operator) . . . . .        | 169 |
| __PKHBT (intrinsic function) . . . . .            | 371      | __section_end (extended operator) . . . . .          | 169 |
| __PKHTB (intrinsic function) . . . . .            | 371      | __section_size (extended operator) . . . . .         | 169 |
| __PLD (intrinsic function) . . . . .              | 372      | __SEL (intrinsic function) . . . . .                 | 375 |
| __PLDW (intrinsic function) . . . . .             | 372      | __set_BASEPRI (intrinsic function) . . . . .         | 376 |
| __PLI (intrinsic function) . . . . .              | 372      | __set_CONTROL (intrinsic function) . . . . .         | 376 |
| __PRETTY_FUNCTION__ (predefined symbol) . . . . . | 396      | __set_CPSR (intrinsic function) . . . . .            | 376 |
| __printf_args (pragma directive) . . . . .        | 348      | __set_FAULTMASK (intrinsic function) . . . . .       | 376 |
| __program_start (label) . . . . .                 | 118      | __set_FPSCR (intrinsic function) . . . . .           | 376 |
| __QADD (intrinsic function) . . . . .             | 372      | __set_interrupt_state (intrinsic function) . . . . . | 377 |
| __QADD8 (intrinsic function) . . . . .            | 373      | __set_LR (intrinsic function) . . . . .              | 377 |
| __QADD16 (intrinsic function) . . . . .           | 373      | __set_MSP (intrinsic function) . . . . .             | 377 |
| __QASX (intrinsic function) . . . . .             | 373      | __set_PRIMASK (intrinsic function) . . . . .         | 377 |
| __QCFlag (intrinsic function) . . . . .           | 373      | __set_PSP (intrinsic function) . . . . .             | 377 |
| __QDADD (intrinsic function) . . . . .            | 372      | __set_SB (intrinsic function) . . . . .              | 378 |
| __QDOUBLE (intrinsic function) . . . . .          | 373      | __set_SP (intrinsic function) . . . . .              | 378 |
| __QDSUB (intrinsic function) . . . . .            | 372      | __SEV (intrinsic function) . . . . .                 | 378 |
| __QFlag (intrinsic function) . . . . .            | 374      | __SHADD8 (intrinsic function) . . . . .              | 378 |
| __QSAX (intrinsic function) . . . . .             | 373      | __SHADD16 (intrinsic function) . . . . .             | 378 |
| __QSUB (intrinsic function) . . . . .             | 372      | __SHASX (intrinsic function) . . . . .               | 378 |
| __QSUB16 (intrinsic function) . . . . .           | 373      | __SHSAX (intrinsic function) . . . . .               | 378 |
| __QSUB8 (intrinsic function) . . . . .            | 373      | __SHSUB16 (intrinsic function) . . . . .             | 378 |
| __ramfunc (extended keyword) . . . . .            | 328      | __SHSUB8 (intrinsic function) . . . . .              | 378 |
| __RBIT (intrinsic function) . . . . .             | 374      | __SMLABB (intrinsic function) . . . . .              | 379 |
| __read (library function) . . . . .               | 126      | __SMLABT (intrinsic function) . . . . .              | 379 |
| customizing . . . . .                             | 122      | __SMLAD (intrinsic function) . . . . .               | 379 |
| __reset_QC_flag (intrinsic function) . . . . .    | 374      | __SMLADX (intrinsic function) . . . . .              | 379 |



|                                                          |     |                                                              |         |
|----------------------------------------------------------|-----|--------------------------------------------------------------|---------|
| <code>__SMLALBB</code> (intrinsic function) . . . . .    | 380 | <code>__STC_noidx</code> (intrinsic function) . . . . .      | 384     |
| <code>__SMLALBT</code> (intrinsic function) . . . . .    | 380 | <code>__STC2</code> (intrinsic function) . . . . .           | 383     |
| <code>__SMLALD</code> (intrinsic function) . . . . .     | 380 | <code>__STC2L</code> (intrinsic function) . . . . .          | 383     |
| <code>__SMLALDX</code> (intrinsic function) . . . . .    | 380 | <code>__STC2L_noidx</code> (intrinsic function) . . . . .    | 384     |
| <code>__SMLALTB</code> (intrinsic function) . . . . .    | 380 | <code>__STC2_noidx</code> (intrinsic function) . . . . .     | 384     |
| <code>__SMLALTT</code> (intrinsic function) . . . . .    | 380 | <code>__STDC_VERSION__</code> (predefined symbol) . . . . .  | 397     |
| <code>__SMLATB</code> (intrinsic function) . . . . .     | 379 | <code>__STDC__</code> (predefined symbol) . . . . .          | 397     |
| <code>__SMLATT</code> (intrinsic function) . . . . .     | 379 | <code>__STREX</code> (intrinsic function) . . . . .          | 385     |
| <code>__SMLAWB</code> (intrinsic function) . . . . .     | 379 | <code>__STREXB</code> (intrinsic function) . . . . .         | 385     |
| <code>__SMLAWT</code> (intrinsic function) . . . . .     | 379 | <code>__STREXD</code> (intrinsic function) . . . . .         | 385     |
| <code>__SMLSDB</code> (intrinsic function) . . . . .     | 379 | <code>__STREXH</code> (intrinsic function) . . . . .         | 385     |
| <code>__SMLSDBX</code> (intrinsic function) . . . . .    | 379 | <code>__swi</code> (extended keyword) . . . . .              | 329     |
| <code>__SMLSLD</code> (intrinsic function) . . . . .     | 380 | <code>__SWP</code> (intrinsic function) . . . . .            | 385     |
| <code>__SMLSLDX</code> (intrinsic function) . . . . .    | 380 | <code>__SWPB</code> (intrinsic function) . . . . .           | 385     |
| <code>__SMMLA</code> (intrinsic function) . . . . .      | 381 | <code>__SXTAB</code> (intrinsic function) . . . . .          | 386     |
| <code>__SMMLAR</code> (intrinsic function) . . . . .     | 381 | <code>__SXTAB16</code> (intrinsic function) . . . . .        | 386     |
| <code>__SMMLS</code> (intrinsic function) . . . . .      | 381 | <code>__SXTAH</code> (intrinsic function) . . . . .          | 386     |
| <code>__SMMLSR</code> (intrinsic function) . . . . .     | 381 | <code>__SXTB16</code> (intrinsic function) . . . . .         | 386     |
| <code>__SMMUL</code> (intrinsic function) . . . . .      | 381 | <code>__task</code> (extended keyword) . . . . .             | 330     |
| <code>__SMMULR</code> (intrinsic function) . . . . .     | 381 | <code>__thumb</code> (extended keyword) . . . . .            | 330     |
| <code>__SMUAD</code> (intrinsic function) . . . . .      | 381 | <code>__TIME__</code> (predefined symbol) . . . . .          | 397     |
| <code>__SMUL</code> (intrinsic function) . . . . .       | 382 | <code>__UADD8</code> (intrinsic function) . . . . .          | 386     |
| <code>__SMULBB</code> (intrinsic function) . . . . .     | 382 | <code>__UADD16</code> (intrinsic function) . . . . .         | 386     |
| <code>__SMULBT</code> (intrinsic function) . . . . .     | 382 | <code>__UASX</code> (intrinsic function) . . . . .           | 386     |
| <code>__SMULTB</code> (intrinsic function) . . . . .     | 382 | <code>__UHADD8</code> (intrinsic function) . . . . .         | 387     |
| <code>__SMULTT</code> (intrinsic function) . . . . .     | 382 | <code>__UHADD16</code> (intrinsic function) . . . . .        | 387     |
| <code>__SMULWB</code> (intrinsic function) . . . . .     | 382 | <code>__UHASX</code> (intrinsic function) . . . . .          | 387     |
| <code>__SMULWT</code> (intrinsic function) . . . . .     | 382 | <code>__UHSAX</code> (intrinsic function) . . . . .          | 387     |
| <code>__SMUSD</code> (intrinsic function) . . . . .      | 381 | <code>__UHSUB16</code> (intrinsic function) . . . . .        | 387     |
| <code>__SMUSDX</code> (intrinsic function) . . . . .     | 381 | <code>__UHSUB8</code> (intrinsic function) . . . . .         | 387     |
| <code>__SSAT</code> (intrinsic function) . . . . .       | 382 | <code>__UMAAL</code> (intrinsic function) . . . . .          | 387     |
| <code>__SSAT16</code> (intrinsic function) . . . . .     | 383 | <code>__ungetchar</code> , in <code>stdio.h</code> . . . . . | 406     |
| <code>__SSAX</code> (intrinsic function) . . . . .       | 375 | <code>__UQADD8</code> (intrinsic function) . . . . .         | 388     |
| <code>__SSUB16</code> (intrinsic function) . . . . .     | 375 | <code>__UQADD16</code> (intrinsic function) . . . . .        | 388     |
| <code>__SSUB8</code> (intrinsic function) . . . . .      | 375 | <code>__UQASX</code> (intrinsic function) . . . . .          | 388     |
| <code>__stackless</code> (extended keyword) . . . . .    | 328 | <code>__UQSAX</code> (intrinsic function) . . . . .          | 388–389 |
| <code>__STC</code> (intrinsic function) . . . . .        | 383 | <code>__UQSUB16</code> (intrinsic function) . . . . .        | 388–389 |
| <code>__STCL</code> (intrinsic function) . . . . .       | 383 | <code>__UQSUB8</code> (intrinsic function) . . . . .         | 388–389 |
| <code>__STCL_noidx</code> (intrinsic function) . . . . . | 384 | <code>__USADA8</code> (intrinsic function) . . . . .         | 388     |

|                                                    |     |                                                      |          |
|----------------------------------------------------|-----|------------------------------------------------------|----------|
| __USAD8 (intrinsic function) . . . . .             | 388 | --aeabi (compiler option) . . . . .                  | 238      |
| __USAT (intrinsic function) . . . . .              | 388 | --align_sp_on_irq (compiler option) . . . . .        | 239      |
| __USAT16 (intrinsic function) . . . . .            | 389 | --all (ielfdump option) . . . . .                    | 461      |
| __USAX (intrinsic function) . . . . .              | 386 | --arm (compiler option) . . . . .                    | 239      |
| __USUB16 (intrinsic function) . . . . .            | 386 | --basic_heap (linker option) . . . . .               | 278      |
| __USUB8 (intrinsic function) . . . . .             | 386 | --BE32 (linker option) . . . . .                     | 279, 281 |
| __UXTAB (intrinsic function) . . . . .             | 389 | --BE8 (linker option) . . . . .                      | 279      |
| __VA_ARGS__ (preprocessor extension) . . . . .     | 165 | --bin (ielftool option) . . . . .                    | 462      |
| __weak (extended keyword) . . . . .                | 331 | --call_graph (compiler option) . . . . .             | 280      |
| __WFE (intrinsic function) . . . . .               | 389 | --char_is_signed (compiler option) . . . . .         | 240      |
| __WFI (intrinsic function) . . . . .               | 389 | --char_is_unsigned (compiler option) . . . . .       | 240      |
| __write (library function) . . . . .               | 126 | --checksum (ielftool option) . . . . .               | 462      |
| customizing . . . . .                              | 122 | --code (ielfdump option) . . . . .                   | 465      |
| __write_array, in stdio.h . . . . .                | 406 | --config (linker option) . . . . .                   | 280      |
| __write_buffered (DLIB library function) . . . . . | 113 | --config_def (linker option) . . . . .               | 280      |
| __YIELD (intrinsic function) . . . . .             | 389 | --cpp_init_routine (linker option) . . . . .         | 281      |
| -D (compiler option) . . . . .                     | 242 | --cpu (compiler option) . . . . .                    | 240      |
| -d (iarchive option) . . . . .                     | 465 | --cpu_mode (compiler option) . . . . .               | 241      |
| -e (compiler option) . . . . .                     | 247 | --create (iarchive option) . . . . .                 | 465      |
| -f (compiler option) . . . . .                     | 250 | --c++ (compiler option) . . . . .                    | 242      |
| -f (IAR utility option) . . . . .                  | 467 | --c89 (compiler option) . . . . .                    | 239      |
| -f (linker option) . . . . .                       | 287 | --debug (compiler option) . . . . .                  | 243      |
| -I (compiler option) . . . . .                     | 252 | --define_symbol (linker option) . . . . .            | 282      |
| -l (compiler option) . . . . .                     | 253 | --delete (iarchive option) . . . . .                 | 465      |
| for creating skeleton code . . . . .               | 151 | --dependencies (compiler option) . . . . .           | 243      |
| -O (compiler option) . . . . .                     | 264 | --dependencies (linker option) . . . . .             | 282      |
| -o (compiler option) . . . . .                     | 264 | --diagnostics_tables (compiler option) . . . . .     | 246      |
| -o (iarchive option) . . . . .                     | 469 | --diagnostics_tables (linker option) . . . . .       | 284      |
| -o (ielfdump option) . . . . .                     | 469 | --diag_error (compiler option) . . . . .             | 244      |
| -o (linker option) . . . . .                       | 297 | --diag_error (linker option) . . . . .               | 283      |
| -r (compiler option) . . . . .                     | 243 | --diag_remark (compiler option) . . . . .            | 244      |
| -r (iarchive option) . . . . .                     | 473 | --diag_remark (linker option) . . . . .              | 283      |
| -S (iarchive option) . . . . .                     | 475 | --diag_suppress (compiler option) . . . . .          | 245      |
| -s (ielfdump option) . . . . .                     | 474 | --diag_suppress (linker option) . . . . .            | 283      |
| -t (iarchive option) . . . . .                     | 478 | --diag_warning (compiler option) . . . . .           | 245      |
| -V (iarchive option) . . . . .                     | 478 | --diag_warning (linker option) . . . . .             | 284      |
| -x (iarchive option) . . . . .                     | 466 | --discard_unused_publics (compiler option) . . . . . | 246      |
| --aapcs (compiler option) . . . . .                | 238 | --dlib_config (compiler option) . . . . .            | 246      |
| --advanced_heap (linker option) . . . . .          | 278 | --ec++ (compiler option) . . . . .                   | 248      |

- edit (isymexport option) . . . . . 466
- eec++ (compiler option) . . . . . 248
- enable\_hardware\_workaround (compiler option) . . . . . 248
- enable\_hardware\_workaround (linker option) . . . . . 285
- enable\_multibytes (compiler option) . . . . . 249
- enable\_restrict (compiler option) . . . . . 249
- entry (linker option) . . . . . 285
- enum\_is\_int (compiler option) . . . . . 250
- error\_limit (compiler option) . . . . . 250
- error\_limit (linker option) . . . . . 286
- exception\_tables (linker option) . . . . . 286
- export\_builtin\_config (linker option) . . . . . 287
- extract (iarchive option) . . . . . 466
- extra\_init (linker option) . . . . . 287
- fill (ielftool option) . . . . . 467
- force\_exceptions (linker option) . . . . . 288
- force\_output (linker option) . . . . . 288
- fpu (compiler option) . . . . . 251
- guard\_calls (compiler option) . . . . . 251
- header\_context (compiler option) . . . . . 252
- ihex (ielftool option) . . . . . 468
- image\_input (linker option) . . . . . 289
- inline (linker option) . . . . . 289
- interwork (compiler option) . . . . . 252
- keep (linker option) . . . . . 290
- legacy (compiler option) . . . . . 254
- lock\_regs (compiler option) . . . . . 254
- log (linker option) . . . . . 290
- log\_file (linker option) . . . . . 291
- macro\_positions\_in\_diagnostics (compiler option) . . . . . 254
- make\_all\_definitions\_weak (compiler option) . . . . . 255
- mangled\_names\_in\_messages (linker option) . . . . . 291
- map (linker option) . . . . . 291
- merge\_duplicate\_sections (linker option) . . . . . 292
- mfc (compiler option) . . . . . 255
- misrac (compiler option) . . . . . 235
- misrac (linker option) . . . . . 276
- misrac\_verbose (compiler option) . . . . . 235
- misrac\_verbose (linker option) . . . . . 277
- misrac1998 (compiler option) . . . . . 235
- misrac1998 (linker option) . . . . . 276
- misrac2004 (compiler option) . . . . . 235
- misrac2004 (linker option) . . . . . 277
- no\_alignment\_reduction (compiler option) . . . . . 255
- no\_clustering (compiler option) . . . . . 256
- no\_code\_motion (compiler option) . . . . . 256
- no\_const\_align (compiler option) . . . . . 256
- no\_cse (compiler option) . . . . . 257
- no\_dynamic\_rtti\_elimination (linker option) . . . . . 293
- no\_exceptions (compiler option) . . . . . 257
- no\_exceptions (linker option) . . . . . 293
- no\_fragments (compiler option) . . . . . 258
- no\_fragments (linker option) . . . . . 293
- no\_inline (compiler option) . . . . . 258
- no\_library\_search (linker option) . . . . . 294
- no\_literal\_pool (compiler option) . . . . . 258
- no\_literal\_pool (linker option) . . . . . 294
- no\_locals (linker option) . . . . . 295
- no\_loop\_align (compiler option) . . . . . 259
- no\_mem\_idioms (compiler option) . . . . . 259
- no\_path\_in\_file\_macros (compiler option) . . . . . 259
- no\_range\_reservations (linker option) . . . . . 295
- no\_remove (linker option) . . . . . 295
- no\_rtti (compiler option) . . . . . 260
- no\_rw\_dynamic\_init (compiler option) . . . . . 260
- no\_scheduling (compiler option) . . . . . 260
- no\_size\_constraints (compiler option) . . . . . 261
- no\_static\_destruction (compiler option) . . . . . 261
- no\_strtab (ielfdump option) . . . . . 468
- no\_system\_include (compiler option) . . . . . 261
- no\_typedefs\_in\_diagnostics (compiler option) . . . . . 262
- no\_unaligned\_access (compiler option) . . . . . 262
- no\_unroll (compiler option) . . . . . 263
- no\_veneurs (linker option) . . . . . 296
- no\_vfe (compiler option) . . . . . 296
- no\_warnings (compiler option) . . . . . 263
- no\_warnings (linker option) . . . . . 296
- no\_wrap\_diagnostics (compiler option) . . . . . 263

|                                                                             |     |                                                             |          |
|-----------------------------------------------------------------------------|-----|-------------------------------------------------------------|----------|
| --no_wrap_diagnostics (linker option) . . . . .                             | 296 | --simple (ielftool option) . . . . .                        | 475      |
| --only_stdout (compiler option) . . . . .                                   | 264 | --simple-ne (ielftool option) . . . . .                     | 476      |
| --only_stdout (linker option) . . . . .                                     | 297 | --skip_dynamic_initialization (linker option) . . . . .     | 300      |
| --option_name (compiler option) . . . . .                                   | 285 | --src (ielftool option) . . . . .                           | 476      |
| --output (compiler option) . . . . .                                        | 264 | --src-len (ielftool option) . . . . .                       | 476      |
| --output (iarchive option) . . . . .                                        | 469 | --src-s3only (ielftool option) . . . . .                    | 476      |
| --output (ielfdump option) . . . . .                                        | 469 | --stack_usage_control (compiler option) . . . . .           | 300      |
| --output (linker option) . . . . .                                          | 297 | --strict (compiler option) . . . . .                        | 270      |
| --parity (ielftool option) . . . . .                                        | 469 | --strip (ielftool option) . . . . .                         | 477      |
| --pi_veneers (linker option) . . . . .                                      | 297 | --strip (iobjmanip option) . . . . .                        | 477      |
| --place_holder (linker option) . . . . .                                    | 298 | --strip (linker option) . . . . .                           | 301      |
| --predef_macro (compiler option) . . . . .                                  | 265 | --symbols (iarchive option) . . . . .                       | 477      |
| --preinclude (compiler option) . . . . .                                    | 265 | --system_include_dir (compiler option) . . . . .            | 270      |
| --preprocess (compiler option) . . . . .                                    | 265 | --threaded_lib (linker option) . . . . .                    | 301      |
| --ram_reserve_ranges (ismexport option) . . . . .                           | 470 | --thumb (compiler option) . . . . .                         | 271      |
| --raw (ielfdump] option) . . . . .                                          | 471 | --titxt (ielftool option) . . . . .                         | 478      |
| --redirect (linker option) . . . . .                                        | 298 | --toc (iarchive option) . . . . .                           | 478      |
| --relaxed_fp (compiler option) . . . . .                                    | 266 | --use_c++_inline (compiler option) . . . . .                | 271      |
| --remarks (compiler option) . . . . .                                       | 267 | --use_unix_directory_separators (compiler option) . . . . . | 271      |
| --remarks (linker option) . . . . .                                         | 298 | --vectorize (compiler option) . . . . .                     | 271      |
| --remove_file_path (iobjmanip option) . . . . .                             | 471 | --verbose (iarchive option) . . . . .                       | 478      |
| --remove_section (iobjmanip option) . . . . .                               | 472 | --verbose (ielftool option) . . . . .                       | 478      |
| --rename_section (iobjmanip option) . . . . .                               | 472 | --vfe (compiler option) . . . . .                           | 301      |
| --rename_symbol (iobjmanip option) . . . . .                                | 472 | --vla (compiler option) . . . . .                           | 272      |
| --replace (iarchive option) . . . . .                                       | 473 | --warnings_affect_exit_code (compiler option) . . . . .     | 225, 272 |
| --require_prototypes (compiler option) . . . . .                            | 267 | --warnings_affect_exit_code (linker option) . . . . .       | 302      |
| --reserve_ranges (ismexport option) . . . . .                               | 473 | --warnings_are_errors (compiler option) . . . . .           | 273      |
| --ropi (compiler option) . . . . .                                          | 268 | --warnings_are_errors (linker option) . . . . .             | 302      |
| --rwp (compiler option) . . . . .                                           | 268 | --warn_about_c_style_casts (compiler option) . . . . .      | 272      |
| --search (linker option) . . . . .                                          | 299 | --whole_archive (linker option) . . . . .                   | 302      |
| --section (compiler option) . . . . .                                       | 269 | .bss (ELF section) . . . . .                                | 434      |
| --section (ielfdump option) . . . . .                                       | 474 | .comment (ELF section) . . . . .                            | 434      |
| --self_reloc (ielftool option) . . . . .                                    | 475 | .data (ELF section) . . . . .                               | 435      |
| --semihosting (linker option) . . . . .                                     | 299 | .data_init (ELF section) . . . . .                          | 435      |
| --separate_cluster_for_initialized_variables<br>(compiler option) . . . . . | 269 | .debug (ELF section) . . . . .                              | 434      |
| --silent (compiler option) . . . . .                                        | 270 | .exc.text (ELF section) . . . . .                           | 435      |
| --silent (iarchive option) . . . . .                                        | 475 | .iar.debug (ELF section) . . . . .                          | 434      |
| --silent (ielftool option) . . . . .                                        | 475 | .iar.dynexit (ELF section) . . . . .                        | 436      |
| --silent (linker option) . . . . .                                          | 300 | .init_array (section) . . . . .                             | 436      |

|                                                                  |          |
|------------------------------------------------------------------|----------|
| <code>.intvec</code> (ELF section) . . . . .                     | 436      |
| <code>.noinit</code> (ELF section) . . . . .                     | 437      |
| <code>.preinit_array</code> (section) . . . . .                  | 437      |
| <code>.prepreinit_array</code> (section) . . . . .               | 437      |
| <code>.rel</code> (ELF section) . . . . .                        | 434      |
| <code>.rela</code> (ELF section) . . . . .                       | 434      |
| <code>.rodata</code> (ELF section) . . . . .                     | 437      |
| <code>.shstrtab</code> (ELF section) . . . . .                   | 434      |
| <code>.strtab</code> (ELF section) . . . . .                     | 434      |
| <code>.symtab</code> (ELF section) . . . . .                     | 434      |
| <code>.text</code> (ELF section) . . . . .                       | 437      |
| <code>.textrow</code> (ELF section) . . . . .                    | 438      |
| <code>.textrow_init</code> (ELF section) . . . . .               | 438      |
| @ (operator)                                                     |          |
| placing at absolute address . . . . .                            | 205      |
| placing in sections . . . . .                                    | 206      |
| <code>#include</code> files, specifying . . . . .                | 223, 252 |
| <code>#warning</code> message (preprocessor extension) . . . . . | 398      |
| <code>%Z</code> replacement string,                              |          |
| implementation-defined behavior . . . . .                        | 492      |

## Numerics

|                                           |     |
|-------------------------------------------|-----|
| 32-bits (floating-point format) . . . . . | 312 |
| 64-bits (floating-point format) . . . . . | 313 |